

INSTRUCTION



THLA/1500-1 LED

6811














REGIOLUX

Regiolux GmbH
 Hellinger Str. 3
 D-97486 Königsberg/Bay.
 T 09525 89-0
<http://www.regiolux.de>
info@regiolux.de

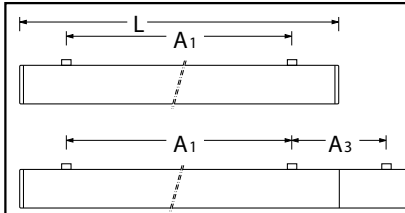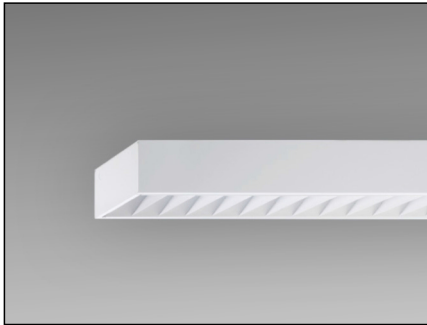

| | L | A1 | A3 |
|-------------|------|------|-----|
| THLA/1500-1 | 1548 | 1300 | 248 |


L = Leuchtenlänge
 A1 = Befestigungsabstand
 A3 = Bef.-Abst. Bandmontage

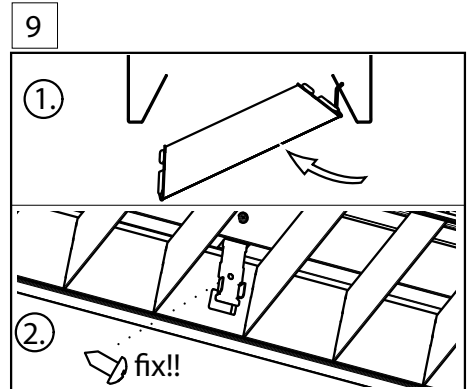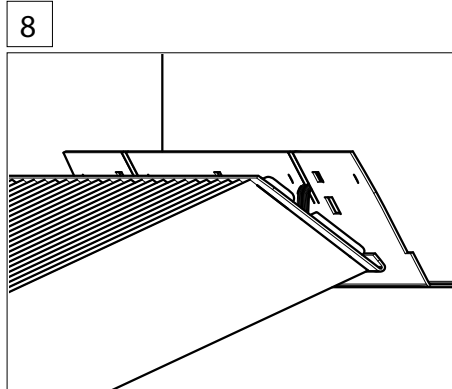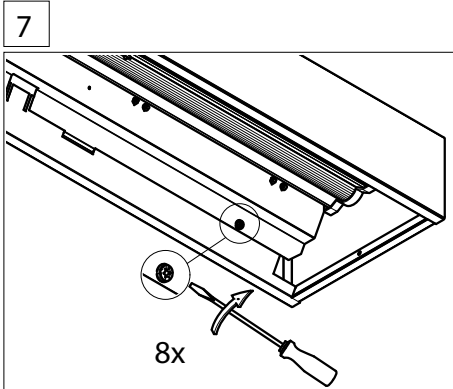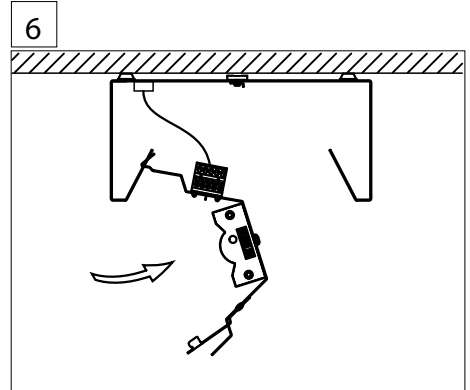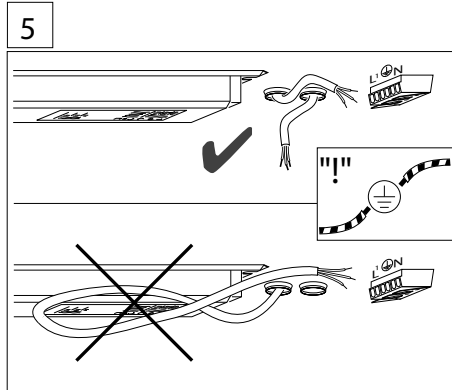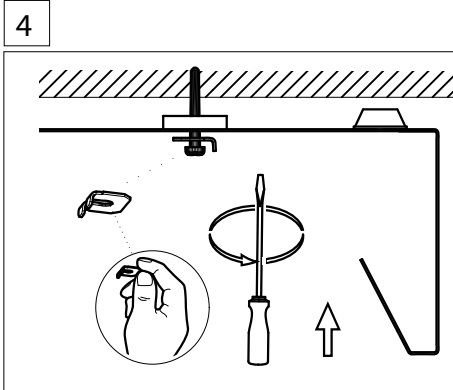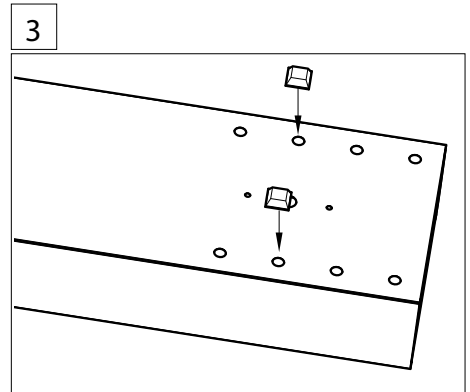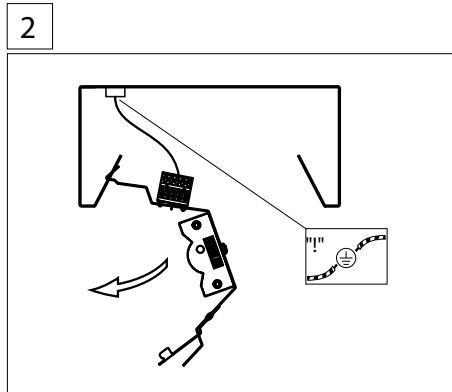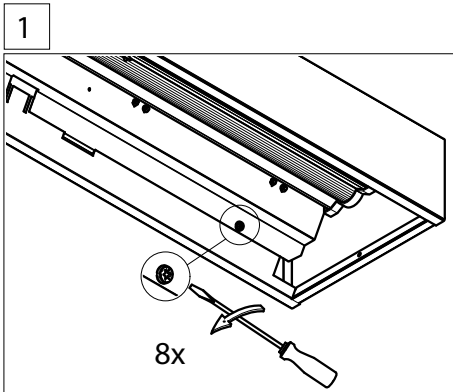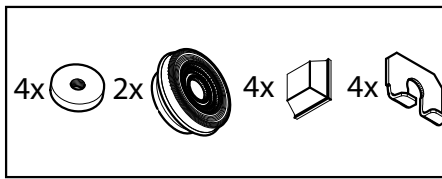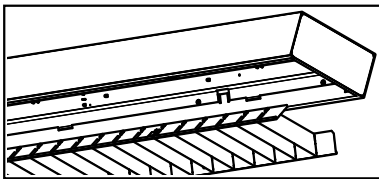

Art-Nr.: 531656 - 08/2021



Option

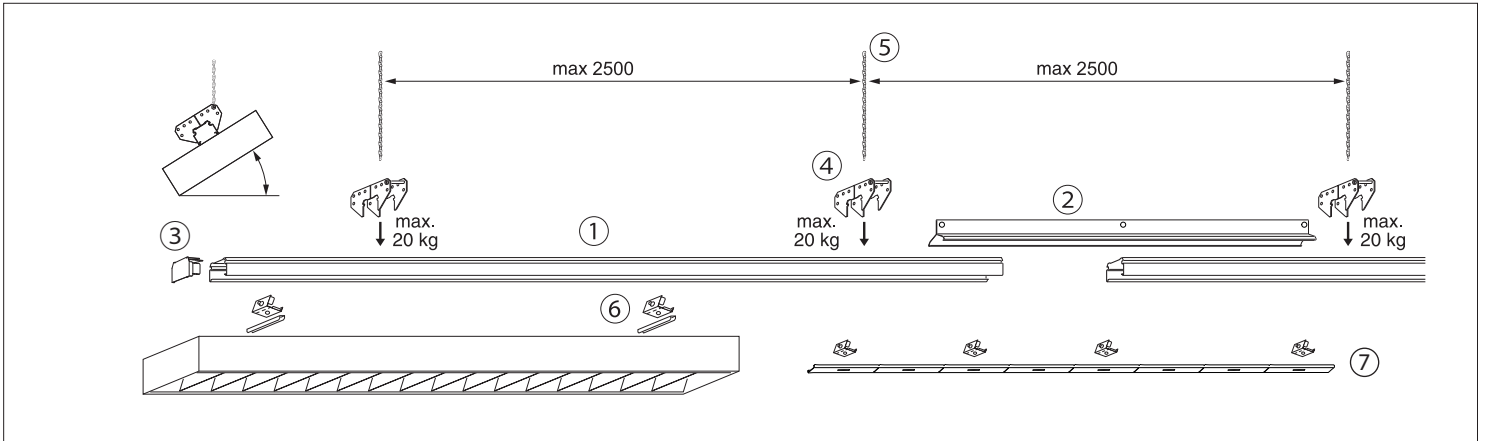

| | | | |
|---|-----------------------|--------------------------------|---|
| 1 | Tragschiene | 1825 2580 150 1825 3580 150 | SDT Basic 1500/II - unverdrahtet - L= 3070 mm SDT Basic 1500/III - unverdrahtet - L= 4605 mm |
| 2 | Tragschienenverbinder | 1890 0022 100 | SDT-AP Abhängeprofil |
| 3 | Stirnseite | 1890 0331 100 | SDTEM |
| 4 | Winkelaufhänger | 6820 9300 120 | SDT-WA |
| 5 | Knotenkette | 9282 9300 100 | KK 30 m |
| 6 | Leuchtenbefestigung | 1890 0058 100 1890 0068 100 | SDLA für SDBAV SDLAD für THLA |
| 7 | Blindabdeckung | 1884 5580 101 | SDBAV kürzbar |