

1845 Cubo LED

Housing: In vandal resistant and V2 self-extinguishing polycarbonate, UV-stabilized.

Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing matt polycarbonate, UV-stabilized, smooth outside, dustproof.


Mounting: Ceiling or wall.

Regulations: Produced according to applicable IEC 60598-1 CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. They can be installed on normally inflammable surfaces. Double insulation.


Photobiological safety class: exempt group EN62471.

LEDs: Power factor: ≥ 0.85

Luminous flux maintenance 80%: 50000h (L80B20)

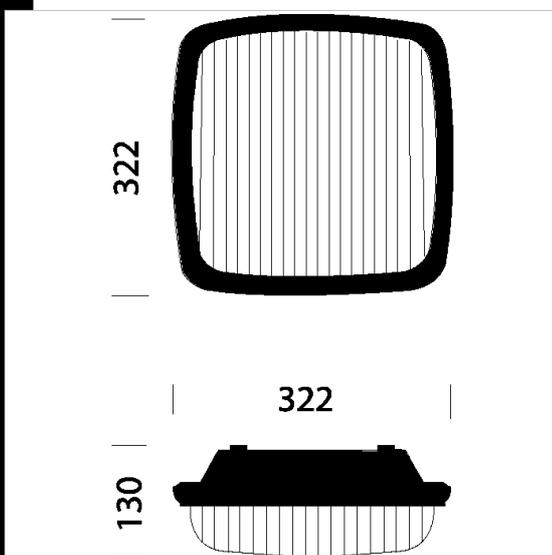

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
427445-00	CLD	1,64	LED-954lm-4000K-CRI 80	10 W	GREY

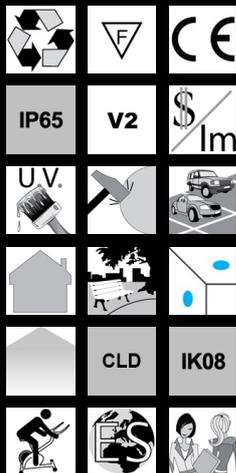

Download

DXF 2D
- 1845.dxf

Montaggi
- COSMO_CUBO_ORMA.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated