



Sample image

Datasheet

Article number: 70012786

Designation: KG100C.T106/41.STM

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
690 AC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
100	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category		Voltage (V)		Current (A)		
AC-32A		20 - 400		100		
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	18,50		
AC-3	380 - 440	3	3	30		
AC-3	660 - 690	3	3	22		
AC-23A	220 - 240	3	3	22		
AC-23A	380 - 440	3	3	37		
AC-23A	660 - 690	3	3	30		
Max. Fuse rating IEC						
Fuse characteristic		No. of Fuses		Current (A)		
gG		1		100		
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
100		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	5	40
DOL		220 - 240	1	2	15	40
DOL		277 - 277	1	2	15	40
DOL		415 - 415	1	2	25	40
DOL		440 - 480	1	2	30	40
DOL		550 - 600	1	2	30	40
DOL		110 - 120	3	3	10	40
DOL		220 - 240	3	3	25	40
DOL		415 - 415	3	3	40	40
DOL		440 - 480	3	3	50	40
DOL		550 - 600	3	3	50	40
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			-- --			
Connecting instructions						
Markings						
Break all lines.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	100	1	1	1	
AC	600	100	1	2	1	
AC	600	100	3	3	1	

General Information
Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA
Nominal Voltage

Voltage (V) AC / DC
600 AC

Rated insulation voltage Ui

Voltage (V) AC / DC
600 AC

Rated thermal current

Current (A) Ambient temperature (°C) Additional Text
100 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	15	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	25	40
DOL	440 - 480	1	2	30	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	40	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire

Temperature rating (°C) Current (A) Text
75 -- --

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	100	1	1	1
AC	600	100	1	2	1
AC	600	100	3	3	1

GENERAL TECHNICAL INFORMATION
Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	1	35mm²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm²	Copper
flexible wire with sleeve	Max.	1	35mm²	Copper

Stripping length

Length (mm) --


Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm) tightening torque (lb-in)
3 27

Approbations
Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

General Information
Text

- EMC Note: This device is suitable for use in environment A and B.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.

Marking


General Information

Text

- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.

Waste Electrical & Electronic Equipment (WEEE)

Picture name



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE

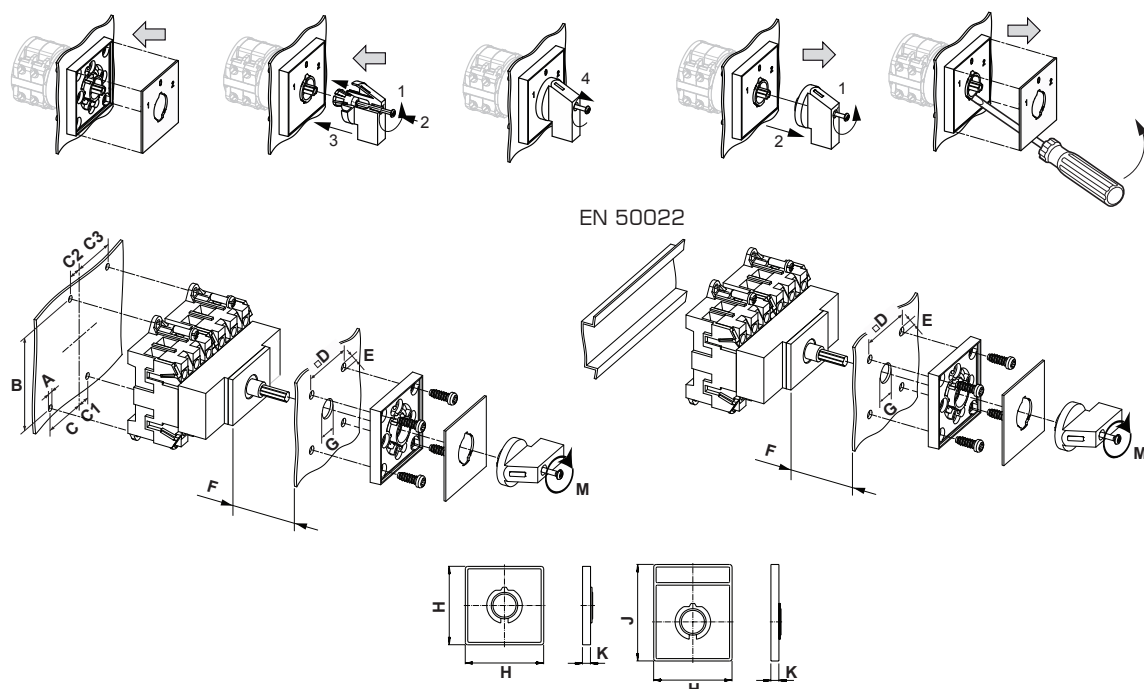


IP - Code front side		IP40
Stages		6,00 - 7,00
A	Ø	5,20 mm
B	H	90,00 mm
B_tol.	H	± 0,50 mm
C	H	47,50 mm
C_tol.	H	± 0,00 mm
C1	H	22,50 mm
D	□	68,00 mm
E	Ø	6,00 mm
F	H	≤ 13,50 mm
G	Ø	10,00 - 15,00 mm
H	H	88,00 mm
J	H	124,00 mm
K	H	8,50 mm
M	M	1,20 Nm



Wiring diagram

KG100C.T306.VE

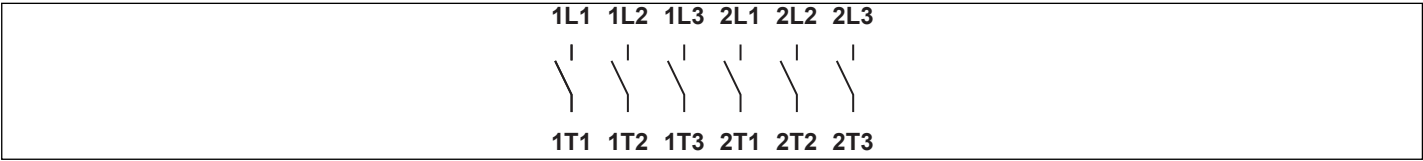

Switch program

KG100C.T306.VE



Kraus & Naimer

KG100C	T306	VE	Page 1 of 1
---------------	-------------	-----------	--------------------

Face Plate		1L1	1L2	1L3	2L1	2L2	2L3		
		1	3	5	7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		1T1	1T2	1T3	2T1	2T2	2T3		
0	270								
1	0								
	90								
	180								

Version: 117

Face plate

S2.F456/C10.V11





Sample image

PADLOCK DEVICE


with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)


Designation: S2.V840D/B7-J

Colour of F-handle ring: "B" electro-grey

Colour of face ring: "7" electro-grey

Type of mounting: "-J" for type of mounting VE for KG80C/KG100C

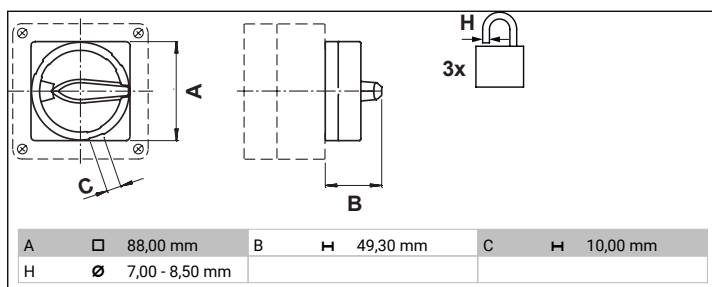



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)


Designation: S1.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch



Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF" splash proof (IP66/67)

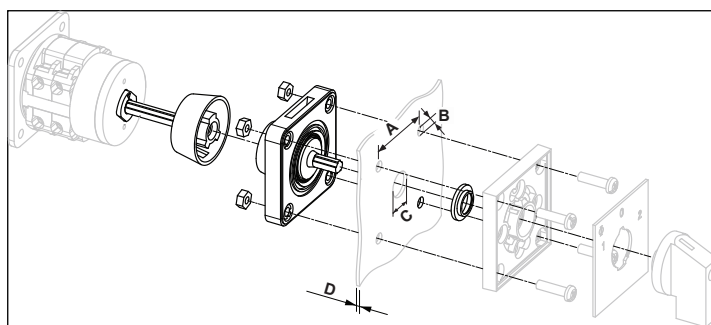


A	□	48,00 mm	B	∅	5,00 mm	C	∅	19,00 - 22,00 mm
D	H	4,00 mm						

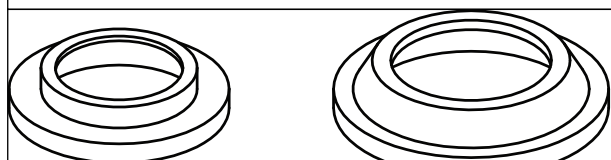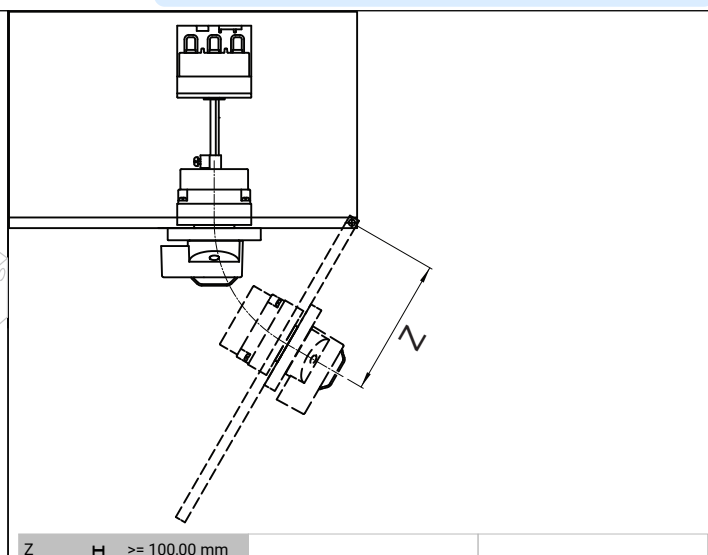

S2D V840 10

S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

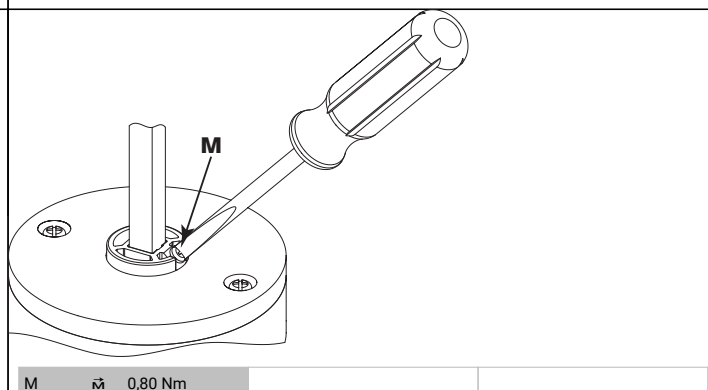

M $\vec{M}$ 0,80 Nm

1. Loosen the screw
2. Move shaft
3. Tighten the screw



Sample image

GROUND TERMINAL (PE) for KG- and KH-Switches

Designation: K2.H052/C

Switch type: "C" for KG80 - KG100C

UL60947-4-1 , UL508

Nominal Voltage

Voltage (V) AC / DC
600 AC

Rated insulation voltage Ui

Voltage (V) AC / DC
600 AC

Rated thermal current

Current (A) Ambient temperature (°C) Additional Text
100 0 - 40 -

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	1	35mm ²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm ²	Copper
flexible wire with sleeve	Max.	1	35mm ²	Copper

Stripping length

Length (mm) -



Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
3	27

Approbations

Specification


CSA C.22.2 No.14

General Information


Text

- Use copper wire only. Do not coat the wire end with tin.

Marking

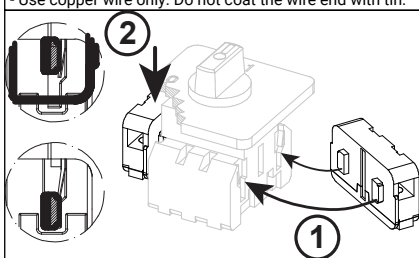

PE
PE

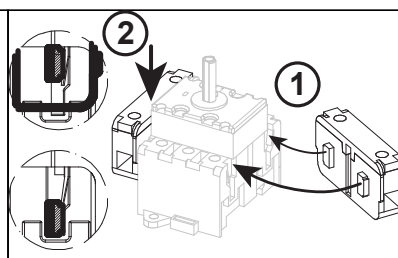

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C
and KH(R)16 - KH(R)25B

Designation: K2.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact
closed in pos. 1 and 1 auxiliary contact closed in
pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE,
VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage			
		Voltage (V)	AC / DC
		690	AC
Rated uninterrupted current I_u/I_{th}			
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements
16	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C
Rated operational current I_e			
Utilization category	Voltage (V)		Current (A)
AC-15	110 - 240		6
AC-15	380 - 440		3
AC-15	500		1,50
AC-21A	20 - 690		16

UL60947-4-1, UL508

Nominal Voltage			
		Voltage (V)	AC / DC
		600	AC
Rated insulation voltage U_i			
		Voltage (V)	AC / DC
		600	AC
Rated thermal current			
		Current (A)	Ambient temperature (°C) Additional Text
		10	0 - 40 --
Pilot duty rating code			
Duty Code			
A600			
General Use			
AC / DC	Voltage (V)	Current (A)	No. of phases No. of poles No. of contacts in series
AC	600	10	1 1 1

GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0.5mm ²	Copper
solid wire	Min.	2	0.5mm ²	Copper
flexible wire	Min.	1	0.75mm ²	Copper
flexible wire	Min.	2	0.75mm ²	Copper
flexible wire	Max.	2	2.5mm ²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm ²	Copper
Stripping length				
Length (mm) --				
				
Recommended screw driver				
Type of screw driver	Value			
Cross Screwdriver	PH1			
Slot screwdriver according to DIN 5264	0,8x4			
Tightening torque of screws				
			tightening torque (Nm)	tightening torque (lb-in)
			0.60	

General Information

Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.

13	21
14	22