



Sample image

Datasheet

Article number: 70002518

Designation: CA10.A221.PN1

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			690 AC / DC			
Rated impulse withstand voltage Uimp						
Voltage (kV)		Overvoltage category	Pollution degree	Supply system		Function
4 III			3	Valid for lines with grounded common neutral termination		Switch disconnecter
Rated uninterrupted current Iu/Ith						
Current (A)		Ambient temperature (°C)	Peak temperature (°C) additional requirements			
20		55	60 Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Rated operational current Ie						
Utilization category			Voltage (V)			Current (A)
AC-15			220 - 240			6
AC-15			380 - 440			4
Rated operational power						
Utilization category		Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3		220 - 240	3	3	3	
AC-3		380 - 440	3	3	5,50	
AC-3		660 - 690	3	3	5,50	
AC-3		220 - 240	1	2	2,20	
AC-3		380 - 440	1	2	3	
AC-23A		220 - 240	3	3	3,70	
AC-23A		380 - 440	3	3	7,50	
AC-23A		660 - 690	3	3	7,50	
AC-23A		220 - 240	1	2	2,50	
AC-23A		380 - 440	1	2	3,70	
Max Fuse Rating IEC						
Fuse characteristic			No. of Fuses			Current (A)
gG			1			25
UL60947-4-1 , UL508						
Nominal Voltage						
			Voltage (V) AC / DC			
			300 AC / DC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			300 AC			
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		20	0 - 40		–	
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)
Reversing			110 - 120	1	2	0,17
Reversing			220 - 240	1	2	0,50
Reversing			277 - 277	1	2	0,60
Reversing			110 - 120	3	3	0,50
Reversing			220 - 240	3	3	1
DOL			110 - 120	1	2	0,50
DOL			220 - 240	1	2	1
DOL			277 - 277	1	2	2
DOL			110 - 120	3	3	1,50
DOL			220 - 240	3	3	3
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
			Temperature rating (°C)		Current (A) Text	
			60 - 75		– Use copper wire only	

Markings

When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

AC / DC

CSA

Nominal Voltage	1.2 V
------------------------	-------

Nominal Voltage	1.2 V
------------------------	-------

Rated insulation voltage U_i	Voltages (V) AC / DC
---	----------------------

Rated insulation voltage U_i	
--------------------------------	--

Rated thermal current			
	Current (A)	Ambient temperature (°C)	Additional Text

Rated thermal current	100 A
-----------------------	-------

Horsepower rating						
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	

Horsepower rating

Pilot duty rating code
Duty Code

Pilot duty rating code

<i>Duty Code</i>

A300

Temp. rating of wire

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in position

General Use

GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION

Size of conductor

Stripping length	Length (mm)
------------------	-------------

Stripping length

Recommended screw driver	
Type of screw driver	Value

Recommended screw driver

Tightening torque of screws		
	<i>tightening torque (Nm)</i>	<i>tightening torque (lb·in)</i>

Tightening torque of screws

Approbations	
Classification	Marketing

Approbations

Downloaded from <http://ajph.org/> on November 10, 2014

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

General Information

Text

- Do not lubricate or treat contacts.

General Information

Text

- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-PN1

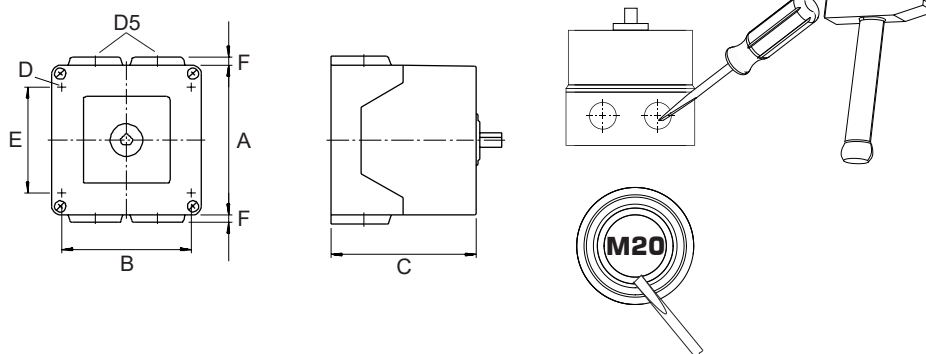

IP - Code front side		IP42
Stages		2,00 - 2,00
A	□	64,00 mm
B	H	50,00 mm
C	H	45,80 mm
D	Ø	4,40 mm
D5	Ø	4,00 x M20
E	H	36,00 mm
F	H	4,00 mm

Wiring diagram

CA10.A221.PN1



Switch program

CA10.A221.PN1



Kraus & Naimer


CA10
A221
Page 1 of 1

Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
Switching Angle 60 Total switching Angle 60		2	4	6	8	10	12	14	16	18	20	22	24
1		330	■		■								
		345											
		0											
		15											
2		30	■		■								
		45											
		60											
		75											
		90											
		105											
		120											
		135											
		150											
		165											
		180											
		195											
		210											
		225											
		240											
		255											
		270											
		285											
		300											
		315											

Version: 108

Face plate

S0.F072/A10.PNL

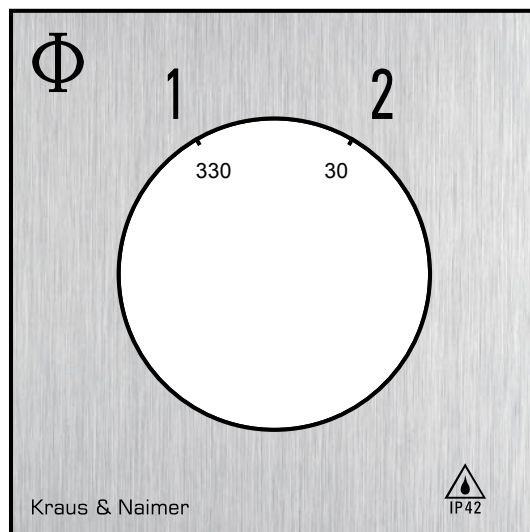

HANDLES

Designation: S0C.G257

Handle colour: "7" electro grey

