



Sample image

Datasheet

Article number: 70002849

Designation: CA10.A250.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107							
Rated insulation voltage Ui							
			Voltage (V) AC / DC				
			690 AC / DC				
Rated impulse withstand voltage Uimp							
Voltage (kV)		Overvoltage category	Pollution degree	Supply system	Function		
4 III			3	Valid for lines with grounded common neutral termination	Switch disconnecter		
Rated uninterrupted current Iu/Ith							
Current (A)	Ambient temperature (°C)		Peak temperature (°C)	additional requirements			
20	55		60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Rated operational current Ie							
Utilization category			Voltage (V)		Current (A)		
AC-15			220 - 240		6		
AC-15			380 - 440		4		
Rated operational power							
Utilization category	Voltage (V)		No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240		3	3	3		
AC-3	380 - 440		3	3	5,50		
AC-3	660 - 690		3	3	5,50		
AC-3	220 - 240		1	2	2,20		
AC-3	380 - 440		1	2	3		
AC-23A	220 - 240		3	3	3,70		
AC-23A	380 - 440		3	3	7,50		
AC-23A	660 - 690		3	3	7,50		
AC-23A	220 - 240		1	2	2,50		
AC-23A	380 - 440		1	2	3,70		
Max Fuse Rating IEC							
Fuse characteristic			No. of Fuses		Current (A)		
gG			1		25		
UL60947-4-1 , UL508							
Nominal Voltage							
			Voltage (V) AC / DC				
			300 AC / DC				
Rated insulation voltage Ui							
			Voltage (V) AC / DC				
			300 AC				
Rated thermal current							
		Current (A)	Ambient temperature (°C)		Additional Text		
		20	0 - 40		--		
Horsepower rating							
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing			110 - 120	1	2	0,17	40
Reversing			220 - 240	1	2	0,50	40
Reversing			277 - 277	1	2	0,60	40
Reversing			110 - 120	3	3	0,50	40
Reversing			220 - 240	3	3	1	40
DOL			110 - 120	1	2	0,50	40
DOL			220 - 240	1	2	1	40
DOL			277 - 277	1	2	2	40
DOL			110 - 120	3	3	1,50	40
DOL			220 - 240	3	3	3	40
Pilot duty rating code							
Duty Code							
A300							
SCCR / Max. fuse rating							
Conditions of acceptability							
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.							
Temp. rating of wire							
			Temperature rating (°C)		Current (A)	Text	
			60 - 75		--	Use copper wire only	

Connecting instructions
Markings

When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	300	20	1	2	1
AC	300	20	3	3	1

CSA
Nominal Voltage

Voltage (V)	AC / DC
300	AC

Rated insulation voltage Ui

Voltage (V)	AC / DC
300	AC

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
20	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40

Pilot duty rating code
Duty Code

A300

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
75	--	only

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	300	20	1	1	1

GENERAL TECHNICAL INFORMATION
Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
0,60	5

Stripping length

Length (mm)	--
8	STRIPPINGLENGTH

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0.5mm²	Copper
solid wire	Min.	2	0.5mm²	Copper
flexible wire	Min.	1	0.75mm²	Copper
flexible wire	Min.	2	0.75mm²	Copper
flexible wire	Max.	2	2.5mm²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper

Approbations
Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4

General Information
Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Marking


General Information

Text

- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

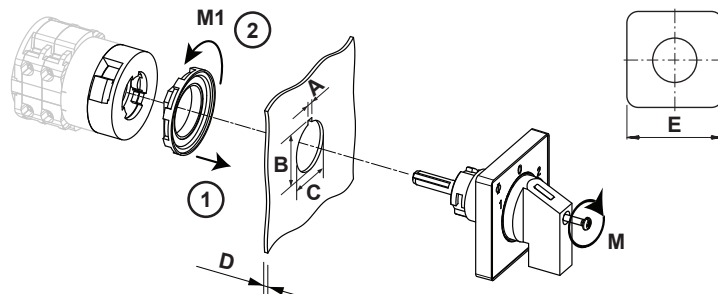


IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm



Wiring diagram

CA10.A250.FT2





Switch program

CA10.A250.FT2



Kraus & Naimer


CA10
A250
Page 1 of 1

Face Plate																									
		1		3		5		7		9		11		13		15		17		19		21		23	
																									
Switching Angle 60 Total switching Angle 120		2		4		6		8		10		12		14		16		18		20		22		24	
1		270																							
		285																							
		300																							
		315																							
2		330																							
		345																							
		0																							
		15																							
3		30																							
		45																							
		60																							
		75																							
		90																							
		105																							
		120																							
		135																							
		150																							
		165																							
		180																							
		195																							
		210																							
		225																							
		240																							
		255																							

Version: 80

Face plate

S0.F076/A10.E1L

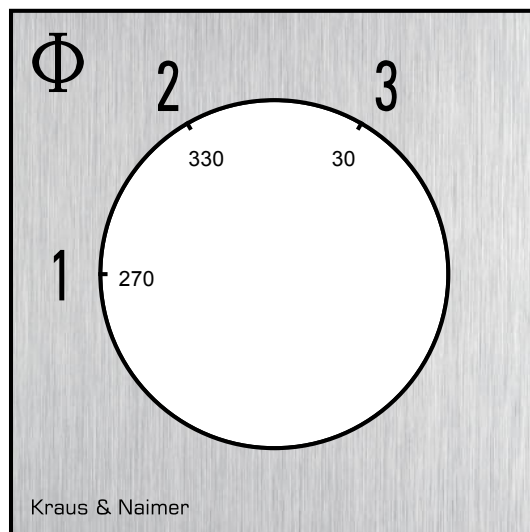

HANDLES

Designation: S0C.G251

Handle colour: "1" black

