



Sample image

Datasheet

Article number: 70006208

Designation: CA20B.A293.EF

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
690 AC / DC					
Rated uninterrupted current Iu/Ith					
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements		
25	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C		
Rated operational current Ie					
Utilization category		Voltage (V)		Current (A)	
AC-15		220 - 240		8	
AC-15		380 - 440		5	
Rated operational power					
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3	220 - 240	3	3	4	
AC-3	380 - 440	3	3	7,50	
AC-3	660 - 690	3	3	7,50	
AC-3	220 - 240	1	2	3	
AC-3	380 - 440	1	2	3,70	
AC-23A	220 - 240	3	3	5,50	
AC-23A	380 - 440	3	3	11	
AC-23A	660 - 690	3	3	11	
AC-23A	220 - 240	1	2	3	
AC-23A	380 - 440	1	2	5,50	
Max Fuse Rating IEC					
Fuse characteristic		No. of Fuses		Current (A)	
gG		1		35	
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C)		Additional Text	
30		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,33	40
Reversing	220 - 240	1	2	0,75	40
Reversing	277 - 277	1	2	1	40
Reversing	415 - 415	1	2	1,50	40
Reversing	440 - 480	1	2	2	40
Reversing	550 - 600	1	2	2	40
Reversing	110 - 120	3	3	1	40
Reversing	220 - 240	3	3	2	40
Reversing	415 - 415	3	3	3	40
Reversing	440 - 480	3	3	5	40
Reversing	550 - 600	3	3	5	40
DOL	110 - 120	1	2	1,50	40
DOL	220 - 240	1	2	3	40
DOL	277 - 277	1	2	3	40
DOL	415 - 415	1	2	3	40
DOL	440 - 480	1	2	5	40
DOL	550 - 600	1	2	5	40
DOL	110 - 120	3	3	3	40
DOL	220 - 240	3	3	7,50	40
DOL	415 - 415	3	3	7,50	40
DOL	440 - 480	3	3	10	40
DOL	550 - 600	3	3	10	40

Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			– Use copper wire only			
Connecting instructions						
Markings						
When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
CSA						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C)		Additional Text		
30		0 - 40		–		
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	1,50	40
DOL		220 - 240	1	2	3	40
DOL		277 - 277	1	2	3	40
DOL		415 - 415	1	2	5	40
DOL		440 - 480	1	2	5	40
DOL		550 - 600	1	2	5	40
DOL		110 - 120	3	3	3	40
DOL		220 - 240	3	3	7,50	40
DOL		415 - 415	3	3	10	40
DOL		440 - 480	3	3	10	40
DOL		550 - 600	3	3	10	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			– only			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	1	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
tightening torque (Nm)			tightening torque (lb-in)			
1			9			
Stripping length						
Length (mm) –						
9 STRIPPINGLENGTH						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
flexible wire	Max.	2	AWG 12		Copper	
flexible wire	Max.	2	4mm²		Copper	
Single-core or stranded wire	Max.	2	AWG 10		Copper	
Single-core or stranded wire	Max.	2	4mm²		Copper	
flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²		Copper	
Approbations						
Specification					Marking	
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						

Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x5,5

General Information

Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-EF

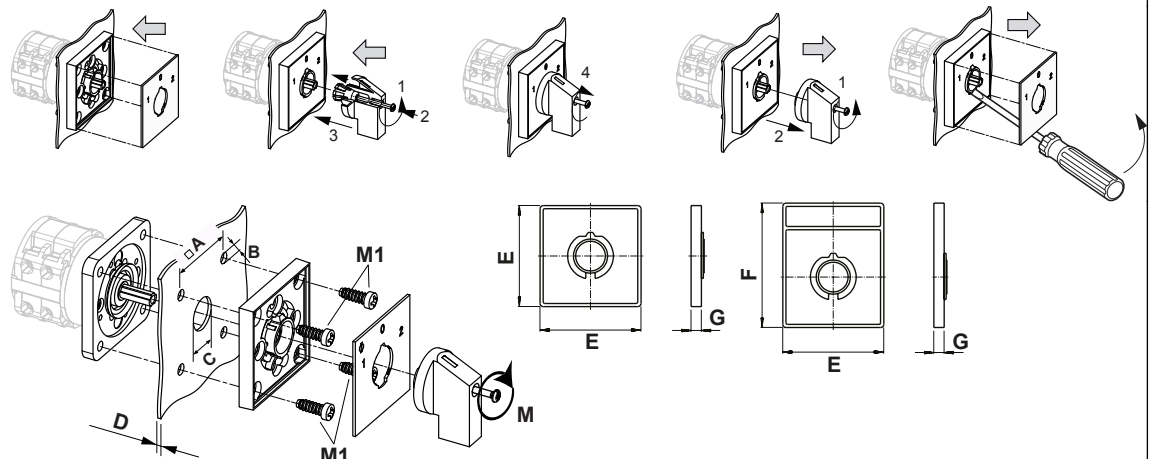

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	□	48,00 mm
B	∅	5,00 mm
C	∅	19,00 - 22,00 mm
D	H	<= 4,00 mm
E	H	64,00 mm
F	H	78,00 mm
G	H	7,40 mm
M	⌀	0,70 Nm
M1	⌀	0,90 Nm

Wiring diagram

CA20B.A293.EF



Switch program


CA20B.A293.EF

 Kraus & Naimer		CA20B		A293		Page 1 of 1							
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24
0		270											
		285											
		300											
		315											
		330											
		345											
1		0											
		15											
		30											
		45											
		60											
		75											
		90											
		105											
		120											
		135											
		150											
		165											
		180											
		195											
		210											
		225											
		240											
		255											

Version: 87

Face plate

S1.F056/A1B.PEL

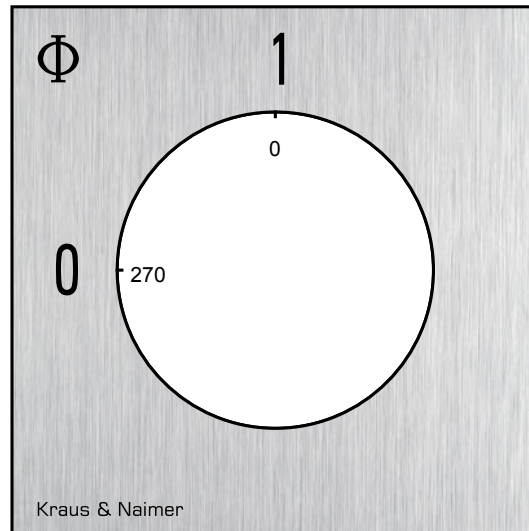

HANDLES

Designation: S1B.G251

Handle colour: "1" black

