



Sample image

Datasheet

Article number: 70018202

Designation: KG32B.T903.VE

Description: Switch Local Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Rated insulation voltage Ui				
Voltage (V) AC / DC				
690 AC				
Rated uninterrupted current Iu/Ith				
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
32	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C	
Rated operational current Ie				
Utilization category		Voltage (V)		Current (A)
AC-32A		20 - 400		32
Rated operational power				
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3	220 - 240	3	3	5,50
AC-3	380 - 440	3	3	7,50
AC-3	660 - 690	3	3	7,50
AC-23A	220 - 240	3	3	5,50
AC-23A	380 - 440	3	3	11
AC-23A	660 - 690	3	3	11
Max Fuse Rating IEC				
Fuse characteristic		No. of Fuses		Current (A)
gG		1		32

UL60947-4-1, UL508

Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			600 AC			
Rated thermal current						
Current (A)			Ambient temperature (°C)		Additional Text	
30			0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL			110 - 120	1	2	1,50
DOL			200 - 208	1	2	3
DOL			220 - 240	1	2	5
DOL			277 - 277	1	2	5
DOL			415 - 415	1	2	5
DOL			440 - 480	1	2	7,50
DOL			550 - 600	1	2	7,50
DOL			110 - 120	3	3	3
DOL			200 - 240	3	3	10
DOL			415 - 415	3	3	10
DOL			440 - 480	3	3	20
DOL			550 - 600	3	3	25
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			-- --			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	30	1	1	1	

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
				Voltage (V) AC / DC		
				600 AC		
Rated insulation voltage Ui						
				Voltage (V) AC / DC		
				600 AC		
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		30	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles
DOL				110 - 120	1	2
DOL				220 - 240	1	2
DOL				277 - 277	1	2
DOL				415 - 415	1	2
DOL				440 - 480	1	2
DOL				550 - 600	1	2
DOL				110 - 120	3	3
DOL				220 - 240	3	3
DOL				415 - 415	3	3
DOL				440 - 480	3	3
DOL				550 - 600	3	3
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
			Temperature rating (°C)	Current (A) Text		
			75	-- --		
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	30	1	1	1	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
				tightening torque (Nm)	tightening torque (lb-in)	
				1,25	11	
Stripping length						
				Length (mm)	--	
				9 STRIPPINGLENGTH		
Size of conductor						
composition of conductor		Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire
flexible wire		Max.	1	AWG 10		Copper
flexible wire		Max.	1	4mm²		Copper
Single-core or stranded wire		Max.	1	6mm²		Copper
Single-core or stranded wire		Max.	1	AWG 10		Copper
flexible wire with sleeve		Max.	1	4mm²		Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommended screw driver						
Type of screw driver				Value		
Cross Screwdriver				PH2		
Slot screwdriver according to DIN 5264				0,8x4		
General Information						
Text						
- EMC Note: This device is suitable for use in environment A and B.						

General Information

Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-VE

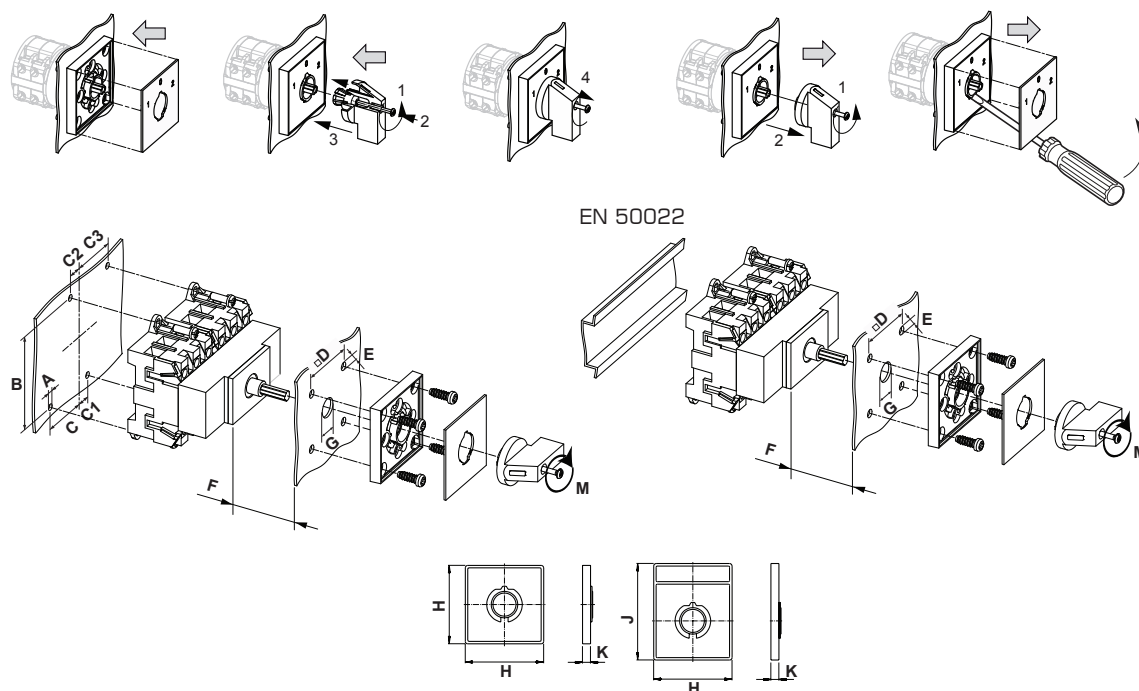

IP - Code front side	IP40
Stages	6,00 - 7,00
A	Ø 4,10 mm
B	H 60,00 mm
B-tol.	H ± 0,50 mm
C	H 22,50 mm
C-tol.	H ± 0,50 mm
C1	H 10,00 mm
C2	H 10,00 mm
C3	H 32,00 mm
D	□ 48,00 mm
E	Ø 5,00 mm
F	H ≤ 13,50 mm
G	Ø 10,00 - 15,00 mm
H	H 64,00 mm
J	H 78,00 mm
K	H 7,40 mm
M	M 0,70 Nm

Wiring diagram

KG32B.T903.VE

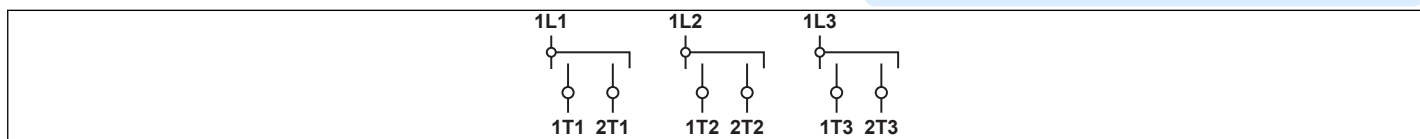

Switch program

KG32B.T903.VE



Kraus & Naimer


KG32B
T903
Page 1 of 1

Face Plate									
		1L1	1L2	1L3	2L1	2L2	2L3		
		1	3	5	7	9	11	13	15
Switching Angle 90 Total switching Angle 180									
		2	4	6	8	10	12	14	16
		1T1	1T2	1T3	2T1	2T2	2T3		
1	270								
0									
2	90								
	180								

Version: 167

Face plate

S1.F057/A1B.PEL

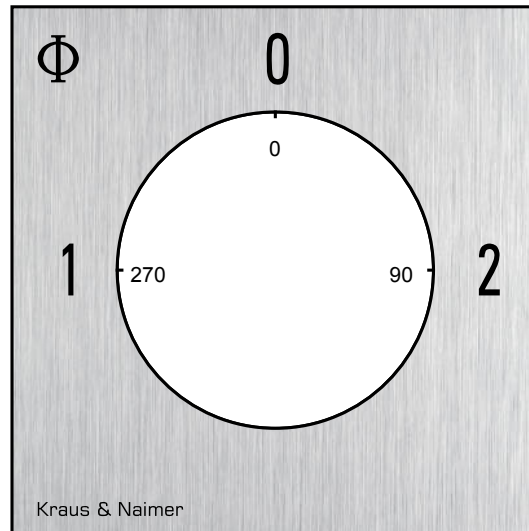

HANDLES

Designation: S1B.G251

Handle colour: "1" black

