



Sample image

Datasheet

Article number: 70019080

Designation: KG160.T104/01.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
1000 AC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
160	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category		Voltage (V)		Current (A)		
AC-32A		20 - 400		160		
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	30		
AC-3	380 - 440	3	3	45		
AC-3	660 - 690	3	3	37		
AC-23A	220 - 240	3	3	30		
AC-23A	380 - 440	3	3	55		
AC-23A	660 - 690	3	3	37		
Max. Fuse rating IEC						
Fuse characteristic		No. of Fuses		Current (A)		
gG		1		160		
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C)	Additional Text			
200		0 - 40	ON-OFF switch (Valid when connected with wire rated for 75°C)			
160		0 - 40	Change over switch (Valid when connected with wire rated for 75°C)			
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	10	40
DOL		220 - 240	1	2	25	40
DOL		277 - 277	1	2	25	40
DOL		440 - 480	1	2	40	40
DOL		550 - 600	1	2	40	40
DOL		110 - 120	3	3	20	40
DOL		220 - 240	3	3	40	40
DOL		440 - 480	3	3	75	40
DOL		440 - 480	3	3	75	60
DOL		550 - 600	3	3	60	40
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 300A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)		Current (A)			Text	
75		--			--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	200	1	1	1	
AC	600	200	1	2	1	
AC	600	200	3	3	1	
AC double-throw function	277	160	1	1	1	
AC double-throw function	600	160	1	2	1	

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC double-throw function	600	160	3	3	1
General Information					
Text					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					
CSA					
Nominal Voltage					
			Voltage (V) AC / DC		
			600 AC		
Rated insulation voltage Ui					
			Voltage (V) AC / DC		
			600 AC		
Rated thermal current					
		Current (A)	Ambient temperature (°C)		Additional Text
		200	0 - 40		--
Horsepower rating					
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL		110 - 120	1	2	10
DOL		220 - 240	1	2	25
DOL		277 - 277	1	2	25
DOL		440 - 480	1	2	40
DOL		550 - 600	1	2	40
DOL		110 - 120	3	3	20
DOL		220 - 240	3	3	40
DOL		440 - 480	3	3	75
DOL		550 - 600	3	3	60
DOL					
Temp. rating of wire					
		Temperature rating (°C)	Current (A) Text		
		75	-- --		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	200	1	1	1
AC	600	200	1	2	1
AC	600	200	3	3	1
GENERAL TECHNICAL INFORMATION					
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1	6mm ²		Copper
flexible wire	Max.	1	70mm ²		Copper
flexible wire	Min.	1	16mm ²		Copper
flexible wire	Max.	1	AWG 2/0		Copper
Single-core or stranded wire	Max.	1	95mm ²		Copper
Single-core or stranded wire	Max.	1	AWG 3/0		Copper
flexible wire with sleeve	Max.	1	70mm ²		Copper
flexible wire with ferrule according to DIN 46228	Min.	1	10mm ²		Copper
Stripping length					
			Length (mm) --		
					
			18		
Recommended screw driver					
Type of screw driver			Value		
Hex key			5		
Tightening torque of screws					
			tightening torque (Nm)		tightening torque (lb-in)
			14		125
Approbations					
Specification					Marking
EAC					
CE marking					
UK Directives					
CSA C.22.2 No.14					
GB/T14048.3					
General Information					
Text					
- EMC Note: This device is suitable for use in environment A and B.					

General Information

Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-E

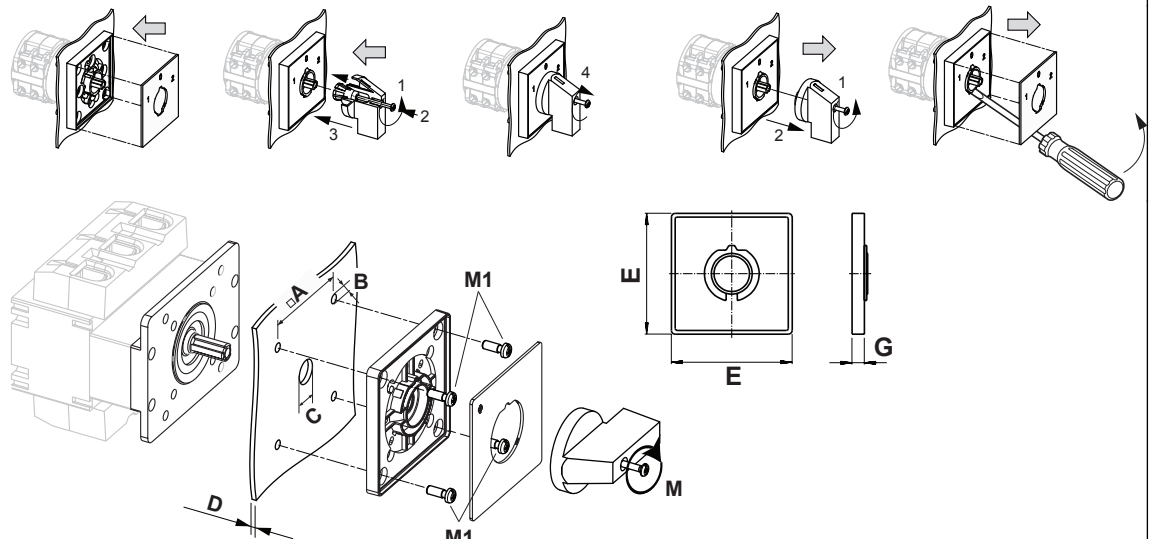


IP - Code front side	IP66, IP67
Stages	1,00 - 12,00
A	□ 68,00 mm
B	∅ 6,00 mm
C	∅ 13,00 - 17,00 mm
D	H ≤ 5,50 mm
E	H 88,00 mm
G	H 8,50 mm
M	M̄ 1,20 Nm
M1	M̄ 1,50 Nm



Wiring diagram

KG160.T304.E

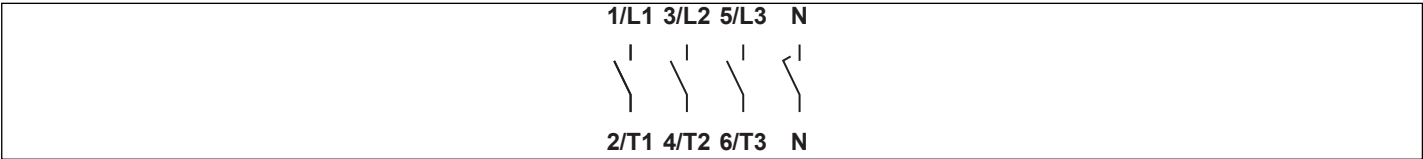

Switch program

KG160.T304.E

 Kraus & Naimer		KG160		T304		Page 1 of 1			
Face Plate 		1/L1 1	3/L2 3	5/L3 5	N 7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2 2/T1	4 4/T2	6 6/T3	8 N	10	12	14	16
0	270								
1	0								
	90								
	180								

Version: 84

Face plate

S2.F456/C10.V11





Sample image

PADLOCK DEVICE

with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)

Designation: S2.V840D/A7-E

Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Type of mounting: "-E" for type of mounting E for KG125/KG160, KG250/KG315

