

Sample image

Datasheet

Article number: 70009970

Designation: KG64B.T203/09.VE

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
690 AC					
Courant Ininterrompu et thermique conventionnel Iu/Ith					
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire		
63	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C		
Courant assigné d'emploi Ie					
Catégorie d'emploi		Tension (V)		Intensité (A)	
AC-32A		20 - 400		63	
Puissance assignée d'emploi					
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)	
AC-3	220 - 240	3	3	11	
AC-3	380 - 440	3	3	18,50	
AC-3	660 - 690	3	3	15	
AC-23A	220 - 240	3	3	11	
AC-23A	380 - 440	3	3	22	
AC-23A	660 - 690	3	3	18,50	
Protection par fusible (IEC)					
Caractéri		Nombre de fusible		Intensité (A)	
gG		1		63	
UL60947-4-1 , UL508					
Nominal Voltage					
Tension (V) AC / DC					
600 AC					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
600 AC					
Rated thermal current					
Intensité (A)		Température Ambiante (°) Additional Text			
60		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	3	40
DOL	220 - 240	1	2	7,50	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	10	40
DOL	440 - 480	1	2	15	40
DOL	550 - 600	1	2	15	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	20	40
DOL	440 - 480	3	3	30	40
DOL	550 - 600	3	3	40	40
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 70A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)		Intensité (A) Text			
60 - 75		-- --			
General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	60	1	1	1
AC	600	60	1	2	1
AC	600	60	3	3	1
General Information					
Text					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					

General Information						
Text						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
			Tension (V) AC / DC			
			600 AC			
Tension assignée d'isolement Ui						
			Tension (V) AC / DC			
			600 AC			
Rated thermal current						
		Intensité (A)	Température Ambiante (°)		Additional Text	
		60	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Tension (V)	Nb de phases	Nb de pôles	Power (HP)
DOL			110 - 120	1	2	3
DOL			220 - 240	1	2	7,50
DOL			277 - 277	1	2	7,50
DOL			415 - 415	1	2	10
DOL			440 - 480	1	2	15
DOL			110 - 120	3	3	5
DOL			220 - 240	3	3	15
DOL			415 - 415	3	3	20
DOL			440 - 480	3	3	30
DOL			550 - 600	3	3	40
Temp. rating of wire						
			Temperature rating (°C)	Intensité (A) Text		
			75	-- --		
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor		Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire
flexible wire		Max.	1	AWG 6		Copper
flexible wire		Max.	1	10mm²		Copper
Single-core or stranded wire		Max.	1	AWG 6		Copper
Single-core or stranded wire		Max.	1	16mm²		Copper
flexible wire with sleeve		Max.	1	10mm²		Copper
Stripping length						
			Length (mm) --			
						
Recommandations concernant le tournevis						
Type			Value			
Tournevis cruciforme			PH2			
Slot screwdriver according to DIN 5264			1,2x6,5			
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1,80		16	
Approbations						
Specification					Marking	
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
General Information						
Text						
- EMC Note: This device is suitable for use in environment A and B.						
- Ne jamais lubrifier ou traiter les contacts.						
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.						
- Use copper wire only. Do not coat the wire end with tin.						
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.						
Waste Electrical & Electronic Equipment (WEEE)						
Picture name		Description				
		Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com				

Proposition 65

Picture name

Description


WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-VE

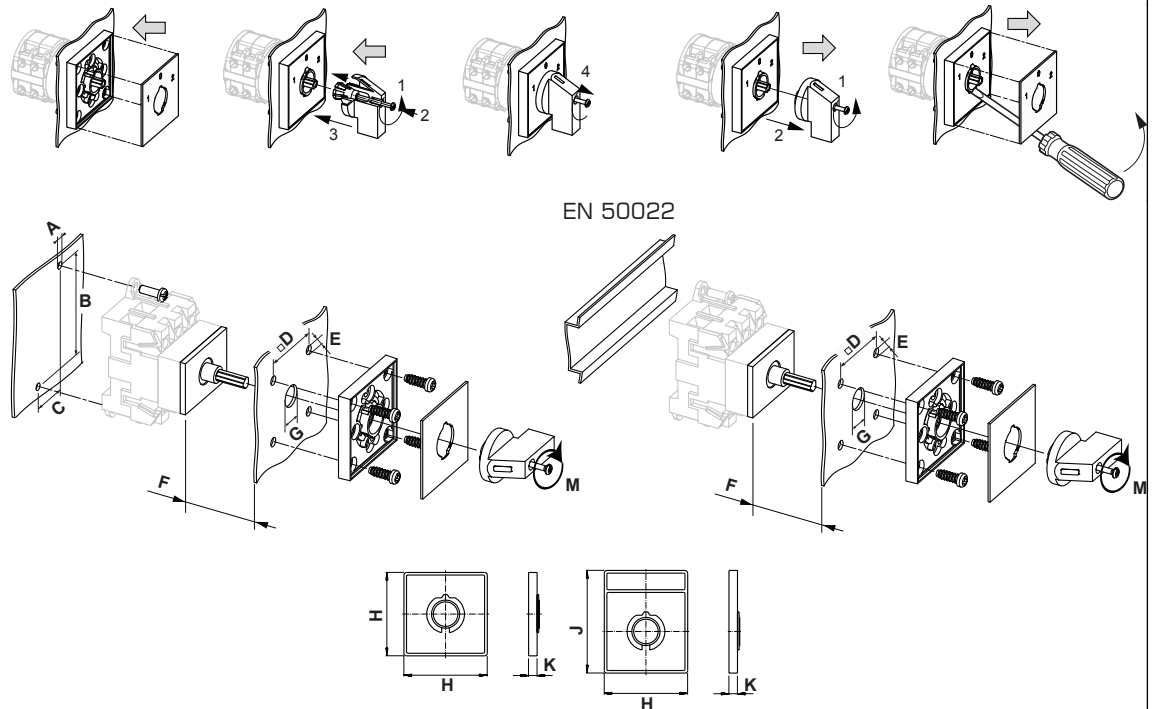


IP - Code front side		IP40
Stages		1,00 - 5,00
A	Ø	4,10 mm
B	H	70,00 mm
C	H	25,00 mm
D	□	48,00 mm
E	Ø	5,00 mm
F	H	<= 13,50 mm
G	Ø	10,00 - 15,00 mm
H	H	64,00 mm
J	H	78,00 mm
K	H	7,40 mm
M	M	0,70 Nm



Wiring diagram

KG64B.T303.VE

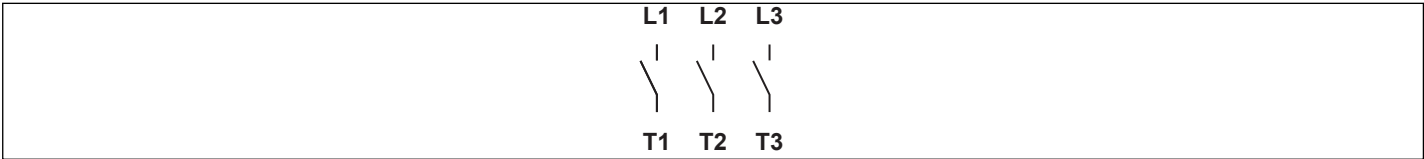

Switch program

KG64B.T303.VE



Kraus & Naimer


KG64B
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0								
	90								
	180								

Version: 102

Face plate

S1.F456/C10.V11H

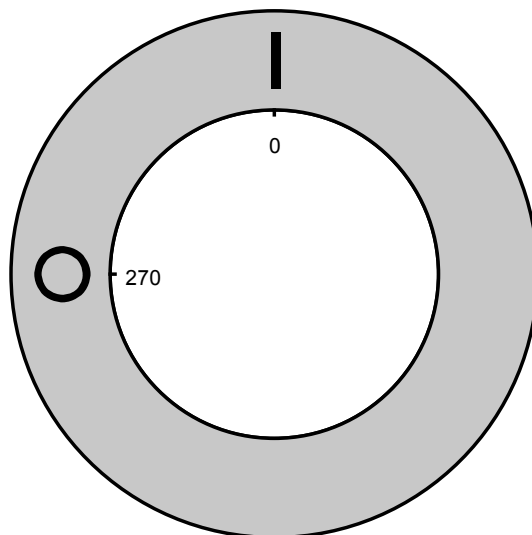



Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/D61/B2



Colour of F-handle ring: "D" red

Colour of face ring: "6" yellow

Locking position: "1" at 270° (1x90°)

Type of mounting: "B" for type of mounting VE

Switch type: "2" for KA-, KG- and KH(R)-switches

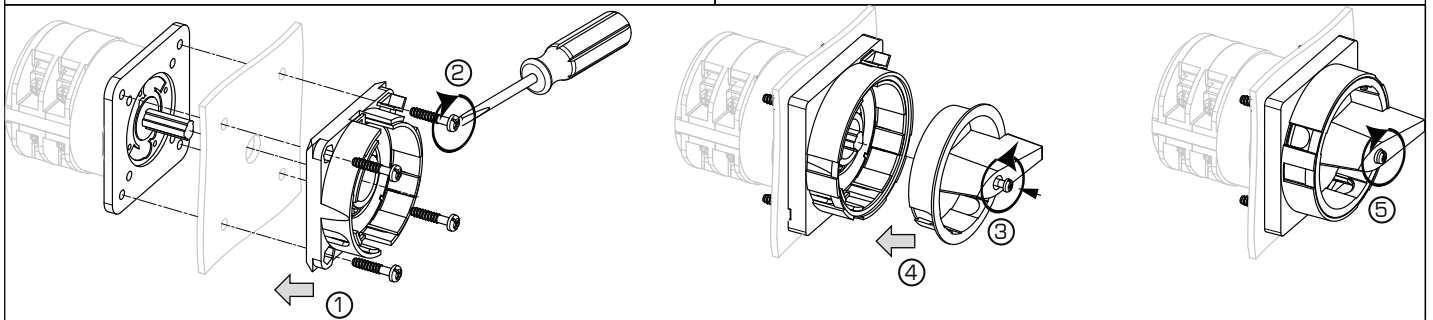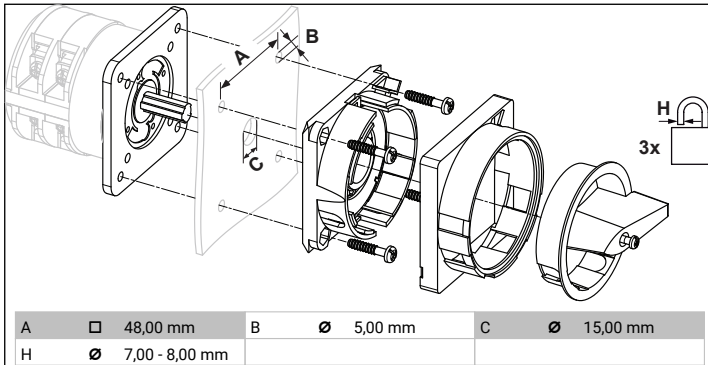


MOUNTING


1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.

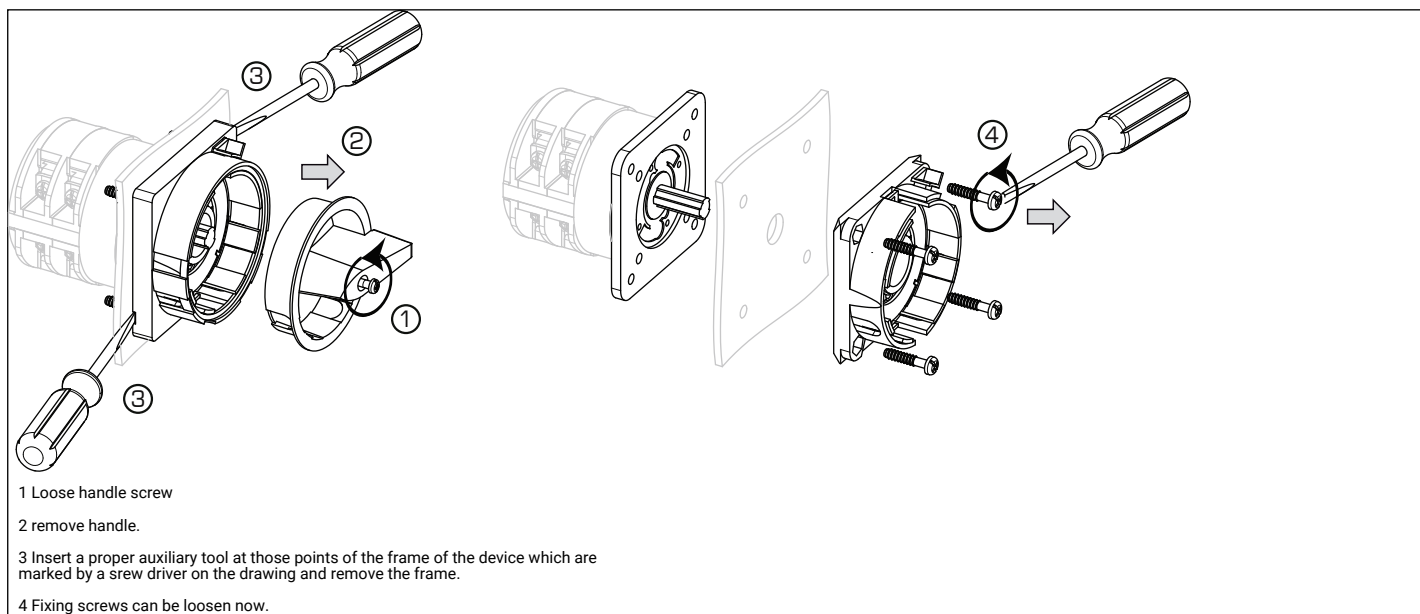



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)


Designation: S1.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch



Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF" splash proof (IP66/67)

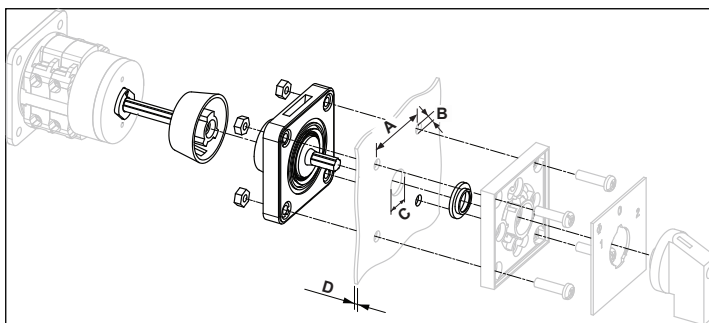


A	□	48,00 mm	B	∅	5,00 mm	C	∅	19,00 - 22,00 mm
D	H	4,00 mm						

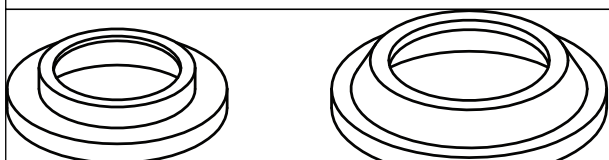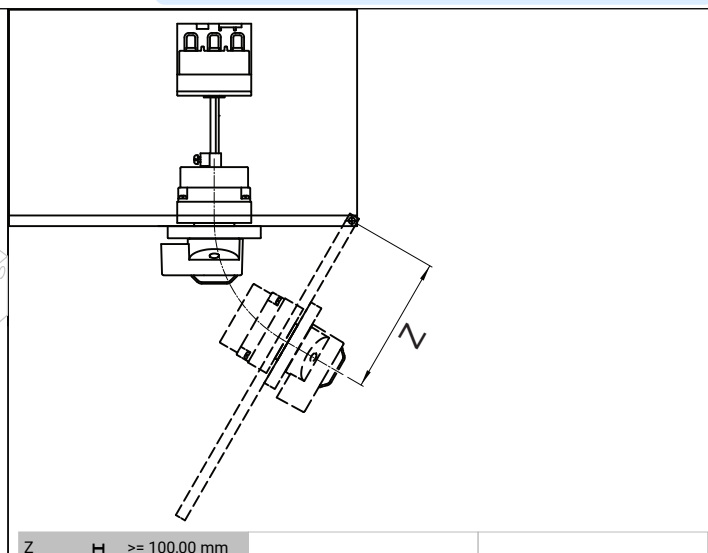

S2D V840 10

S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

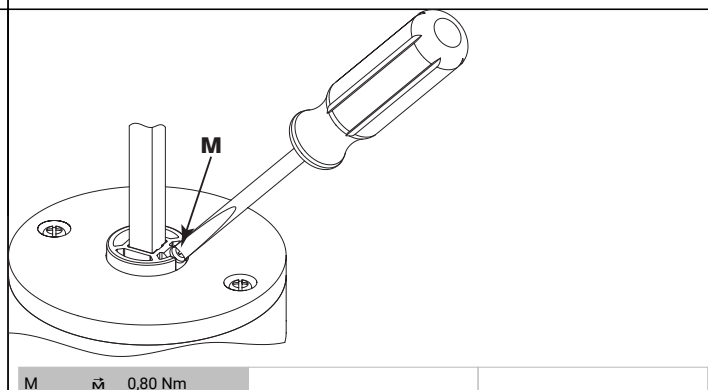

M $\vec{M}$ 0,80 Nm

1. Loosen the screw
2. Move shaft
3. Tighten the screw