



Sample image

Datasheet

Article number: 70010020

Designation: KG41.T204/40.KL11V

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
690 AC						
Courant Ininterrompu et thermique conventionnel lu/lth						
Intensité (A)		Température Ambiante (°)		Température Maxi (°) Spécification complémentaire		
40		50		55 Température ambiante +50°C durant 24 heures avec point à +55°C		
Courant assigné d'emploi Ie						
Catégorie d'emploi				Tension (V)		Intensité (A)
AC-32A				20 - 400		40
Puissance assignée d'emploi						
Catégorie d'emploi		Tension (V)		Nb de phases		Nb de pôles
AC-3		220 - 240		3		3
AC-3		380 - 440		3		3
AC-3		660 - 690		3		3
AC-23A		220 - 240		3		3
AC-23A		380 - 440		3		3
AC-23A		660 - 690		3		3
Protection par fusible (IEC)						
Caractéristique				Nombre de fusible		Intensité (A)
gG				1		50
UL60947-4-1 , UL508						
Nominal Voltage						
Tension (V) AC / DC						
600 AC						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
600 AC						
Rated thermal current						
Intensité (A)			Température Ambiante (°) Additional Text			
42			0 - 40 --			
Horsepower rating						
Across-the-Line Motor Starting		Tension (V)		Nb de phases		Nb de pôles
DOL		110 - 120		1		2
DOL		220 - 240		1		2
DOL		277 - 277		1		2
DOL		415 - 415		1		2
DOL		440 - 480		1		2
DOL		550 - 600		1		2
DOL		110 - 120		3		3
DOL		220 - 240		3		3
DOL		415 - 415		3		3
DOL		440 - 480		3		3
DOL		550 - 600		3		3
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 60A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)				Intensité (A) Text		
60 - 75				-- --		
General Use						
AC / DC		Tension (V)		Intensité (A)		Nb de phases
AC		277		42		1
						Nb de pôles
						1
						No. of contacts in series

General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	600	42	1	2	1
AC	600	42	3	3	1

General Information

Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA

Nominal Voltage

Tension (V) AC / DC
600 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC
600 AC

Rated thermal current

Intensité (A) 40
Température Ambiante (°) 0 - 40 Additional Text --

Horsepower rating

Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	2	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	7,50	40
DOL	440 - 480	1	2	10	40
DOL	550 - 600	1	2	10	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	15	40
DOL	440 - 480	3	3	25	40
DOL	550 - 600	3	3	30	40

Temp. rating of wire

Temperature rating (°C) 75
Intensité (A) Text --

General Use

AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	40	1	1	1
AC	600	40	1	2	1
AC	600	40	3	3	1

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	2	0,75mm ²	Copper
solid wire	Min.	1	1,5mm ²	Copper
flexible wire	Max.	1	AWG 6	Copper
flexible wire	Min.	1	2,5mm ²	Copper
flexible wire	Max.	1	10mm ²	Copper
flexible wire	Min.	2	1,5mm ²	Copper
Single-core or stranded wire	Max.	1	AWG 6	Copper
Single-core or stranded wire	Max.	1	16mm ²	Copper
flexible wire with sleeve	Max.	1	10mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,75mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	1,5mm ²	Copper

Stripping length

Length (mm) --



Recommandations concernant le tournevis

Type	Value
Tournevis cruciforme	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm) 1,80
tightening torque (lb-in) 16

Approbations

Specification	Marking
---------------	---------

EAC



CE marking



UK Directives



CSA C.22.2 No.14



Approbations

Specification

Marking

GB/T14048.3



General Information

Text

- EMC Note: This device is suitable for use in environment A and B.
- Ne jamais lubrifier ou traiter les contacts.
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Mounting-KL11V

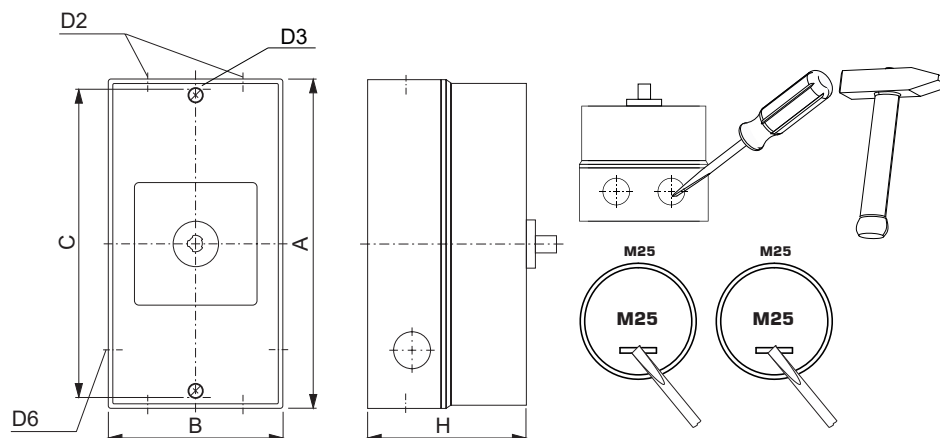

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	190,00 mm
B	H	100,00 mm
C	H	178,00 mm
D2	Ø	4,00 x M25
D3	Ø	5,60 mm
D6	Ø	2,00 x M25
H	H	93,00 mm



Wiring diagram

KG41.T304.KL11V



Switch program


KG41.T304.KL11V

 Kraus & Naimer		KG41		T304		Page 1 of 1			
Face Plate									
		L1 1	L2 3	L3 5	N 7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2 T1	4 T2	6 T3	8 N	10	12	14	16
0	270								
1	0								
	90								
	180								

Version: 94

Face plate

S1.F656/E10.V9

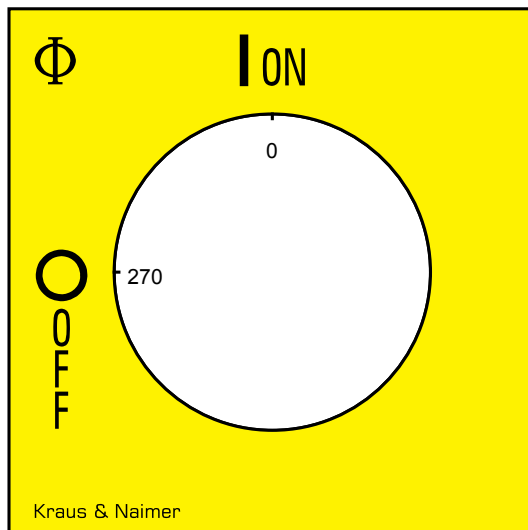

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K1.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage			
		Tension (V) AC / DC	
		690 AC	
Courant ininterrompu et thermique conventionnel lu/lth			
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire
16	55	60	Température ambiante +55°C durant 24 heures avec point à +60°C
Courant assigné d'emploi le			
Catégorie d'emploi	Tension (V)		Intensité (A)
AC-15	110 - 240		6
AC-15	380 - 440		3
AC-15	500		1,50
AC-21A	20 - 690		16

UL60947-4-1, UL508

Nominal Voltage			
		Tension (V) AC / DC	
		600 AC	
Tension assignée d'isolement Ui			
		Tension (V) AC / DC	
		600 AC	
Rated thermal current			
		Intensité (A)	Température Ambiante (°) Additional Text
		10	0 - 40 --
Pilot duty rating code			
Duty Code			
A600			
General Use			
AC / DC	Tension (V)	Intensité (A)	Nb de phases Nb de pôles No. of contacts in series
AC	600	10	1 1 1

GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,5mm ²	Copper
solid wire	Min.	2	0,5mm ²	Copper
flexible wire	Min.	1	0,75mm ²	Copper
flexible wire	Min.	2	0,75mm ²	Copper
flexible wire	Max.	2	2,5mm ²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,5mm ²	Copper
Stripping length				
Length (mm) --				
				
Recommandations concernant le tournevis				
Type	Value			
Tournevis cruciforme	PH1			
Slot screwdriver according to DIN 5264	0,8x4			
Tightening torque of screws				
			tightening torque (Nm)	tightening torque (lb-in)
			0.60	

General Information

Text

- Ne jamais lubrifier ou traiter les contacts.
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.

13	21
14	22