

Sample image

Datasheet

Article number: 70010561

Designation: KG125.T203/09.VE

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
1000 AC					
Courant ininterrompu et thermique conventionnel lu/lth					
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire		
125	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C		
Courant assigné d'emploi le					
Catégorie d'emploi		Tension (V)		Intensité (A)	
AC-32A		20 - 400		125	
Puissance assignée d'emploi					
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)	
AC-3	220 - 240	3	3	22	
AC-3	380 - 440	3	3	37	
AC-3	660 - 690	3	3	30	
AC-23A	220 - 240	3	3	30	
AC-23A	380 - 440	3	3	45	
AC-23A	660 - 690	3	3	37	
Protection par fusible (IEC)					
Caractéri		Nombre de fusible		Intensité (A)	
gG		1		125	
UL60947-4-1 , UL508					
Nominal Voltage					
Tension (V) AC / DC					
600 AC					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
600 AC					
Rated thermal current					
	Intensité (A)	Température Ambiante (°)	Additional Text		
	150	0 - 40	ON-OFF switch (Valid when connected with wire rated for 75°C)		
	125	0 - 40	Change over switch (Valid when connected with wire rated for 75°C)		
Horsepower rating					
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	7,50	40
DOL	220 - 240	1	2	20	40
DOL	277 - 277	1	2	20	40
DOL	440 - 480	1	2	35	40
DOL	550 - 600	1	2	35	40
DOL	110 - 120	3	3	15	40
DOL	220 - 240	3	3	30	40
DOL	440 - 480	3	3	60	40
DOL	550 - 600	3	3	60	40
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 300A Class J fuses.					
Temp. rating of wire					
	Temperature rating (°C)	Intensité (A) Text			
	75	-- --			
General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	125	1	1	1
AC	277	150	1	1	1
AC	600	150	1	2	1
AC	600	150	3	3	1
AC double-throw function	600	125	1	2	1
AC double-throw function	600	125	3	3	1

General Information

Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

CSA

Nominal Voltage

Tension (V) AC / DC

600 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC

600 AC

Rated thermal current

Intensité (A)

150

Température Ambiante (°)

0 - 40

Additional Text

--

Horsepower rating

Across-the-Line Motor Starting

	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	7,50	40
DOL	220 - 240	1	2	20	40
DOL	277 - 277	1	2	20	40
DOL	440 - 480	1	2	35	40
DOL	550 - 600	1	2	35	40
DOL	110 - 120	3	3	15	40
DOL	220 - 240	3	3	30	40
DOL	440 - 480	3	3	60	40
DOL	550 - 600	3	3	60	40

Temp. rating of wire

Temperature rating (°C)

75

Intensité (A) Text

--

General Use

AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	150	1	1	1
AC	600	150	1	2	1
AC	600	150	3	3	1

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	6mm²	Copper
flexible wire	Max.	1	70mm²	Copper
flexible wire	Min.	1	16mm²	Copper
flexible wire	Max.	1	AWG 2/0	Copper
Single-core or stranded wire	Max.	1	95mm²	Copper
Single-core or stranded wire	Max.	1	AWG 3/0	Copper
flexible wire with sleeve	Max.	1	70mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	10mm²	Copper

Stripping length

Length (mm) --

18

Recommandations concernant le tournevis

Type

Clé Allen

Value

5

Tightening torque of screws

tightening torque (Nm)

14

tightening torque (lb-in)

125

Approbations

Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

General Information

Text

- EMC Note: This device is suitable for use in environment A and B.

- Ne jamais lubrifier ou traiter les contacts.

- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.

- Use copper wire only. Do not coat the wire end with tin.

- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.



Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal


Fixation-VE

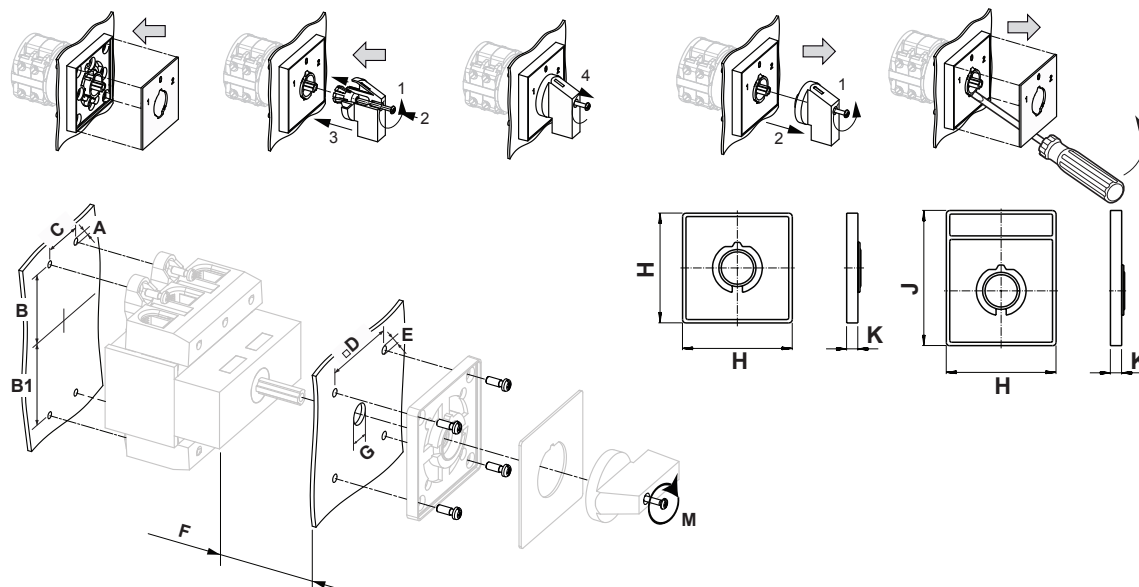

IP - Code front side	IP40
Stages	1,00 - 5,00
A	Ø 6,40 mm
B	H 59,00 - 61,00 mm
B1	H 59,00 - 61,00 mm
C	H 36,00 mm
D	□ 68,00 mm
E	Ø 6,00 mm
F	H ≤ 16,00 mm
G	Ø 13,00 - 17,00 mm
H	H 88,00 mm
J	H 124,00 mm
K	H 8,50 mm
M	⌀ 1,20 Nm

Wiring diagram

KG125.T303.VE

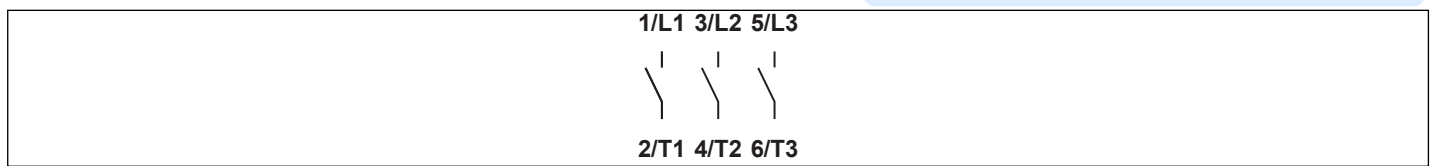


Switch program

KG125.T303.VE



Kraus & Naimer


KG125
T303
Page 1 of 1

Face Plate									
	1	1/L1	3/L2	5/L3					
	0	1	3	5	7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		2/T1	4/T2	6/T3					
0	270								
1	0	■	■	■					
	90								
	180								

Version: 84

Face plate

S2.F456/C10.V11

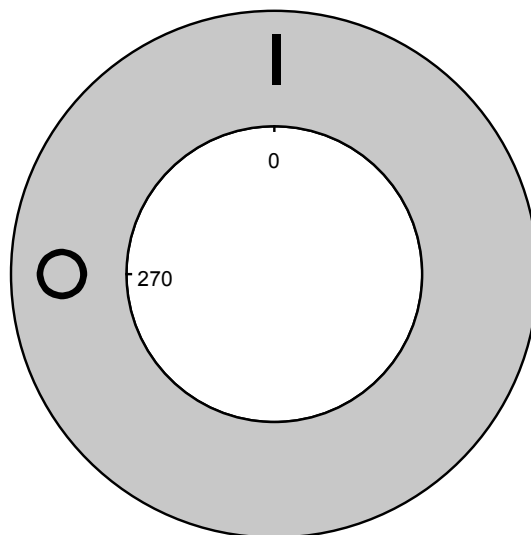



Sample image


PADLOCK DEVICE


with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)

Designation: S2.V840D/D6

Colour of F-handle ring: "D" red

Colour of face ring: "6" yellow

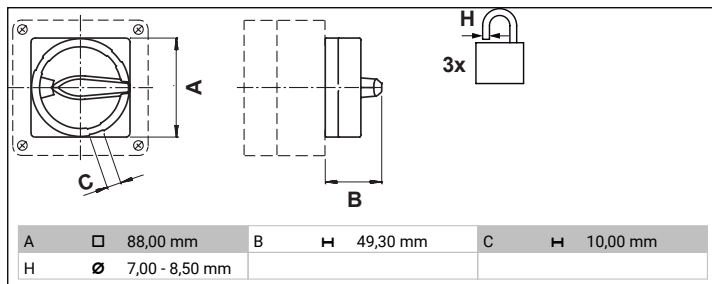



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)


Designation: S2.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch


Shaft length: "1" 60 - 90 mm

Application: "S" for type of mounting VE


Type of version: "-EF" splash proof (IP66/67)

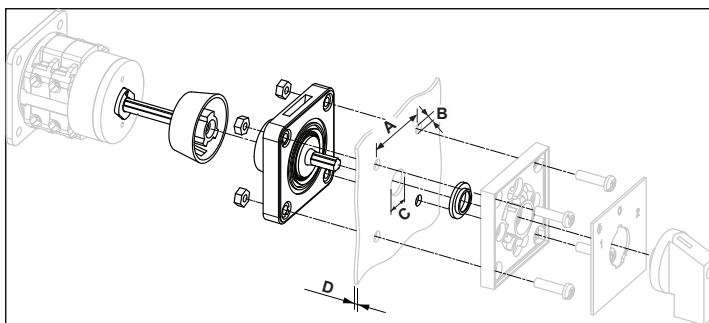

A	□	68,00 mm	B	∅	6,00 mm	C	∅	26,00 - 30,00 mm
D	H	5,50 mm						




S2D V840 10




S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

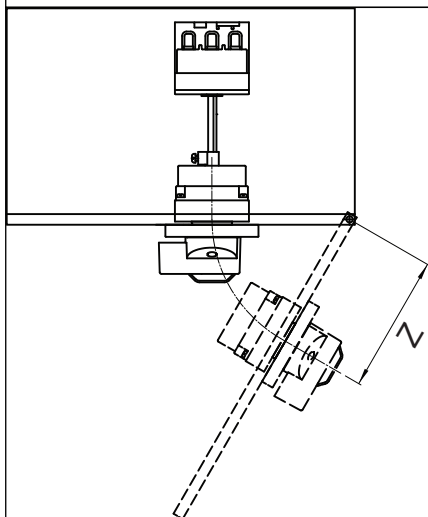

Z	H	>= 110,00 mm		
---	---	--------------	--	--

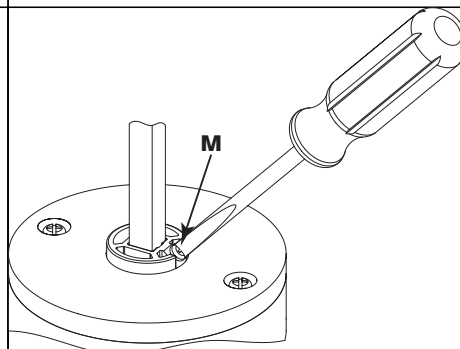

M $\vec{M}$ 0,80 Nm

1. Loosen the screw
2. Move shaft
3. Tighten the screw