



Sample image

Datasheet

Article number: 70014372

Designation: KG80C.T106/41.STM

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Tension assignée d'isolement Ui				
Tension (V) AC / DC				
690 AC				
Courant Ininterrompu et thermique conventionnel Iu/Ith				
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire	
80	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C	
Courant assigné d'emploi Ie				
Catégorie d'emploi		Tension (V)		Intensité (A)
AC-32A		20 - 400		80
Puissance assignée d'emploi				
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)
AC-3	220 - 240	3	3	15
AC-3	380 - 440	3	3	22
AC-3	660 - 690	3	3	18,50
AC-23A	220 - 240	3	3	18,50
AC-23A	380 - 440	3	3	30
AC-23A	660 - 690	3	3	22
Protection par fusible (IEC)				
Caractéri		Nombre de fusible		Intensité (A)
gG		1		80
UL60947-4-1 , UL508				
Nominal Voltage				
Tension (V) AC / DC				
600 AC				
Tension assignée d'isolement Ui				
Tension (V) AC / DC				
600 AC				
Rated thermal current				
Intensité (A)		Température Ambiante (°) Additional Text		
80		0 - 40 --		
Horsepower rating				
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP) Ambient temperature [°C]
DOL	110 - 120	1	2	5 40
DOL	220 - 240	1	2	10 40
DOL	277 - 277	1	2	15 40
DOL	415 - 415	1	2	20 40
DOL	440 - 480	1	2	20 40
DOL	550 - 600	1	2	30 40
DOL	110 - 120	3	3	10 40
DOL	220 - 240	3	3	25 40
DOL	415 - 415	3	3	30 40
DOL	440 - 480	3	3	50 40
DOL	550 - 600	3	3	50 40
SCCR / Max. fuse rating				
Conditions of acceptability				
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.				
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.				
Temp. rating of wire				
Temperature rating (°C)		Intensité (A) Text		
75		-- --		
Connecting instructions				
Markings				
Break all lines.				
General Use				
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles No. of contacts in series
AC	277	80	1	1 1
AC	600	80	1	2 1
AC	600	80	3	3 1

General Information

Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA

Nominal Voltage

Tension (V) AC / DC

600 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC

600 AC

Rated thermal current

Intensité (A)

80

Température Ambiante (°) Additional Text

0 - 40 -

Horsepower rating

Across-the-Line Motor Starting

	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	10	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	20	40
DOL	440 - 480	1	2	20	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	30	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire

Temperature rating (°C)

75

Intensité (A) Text

-- --

General Use

AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	80	1	1	1
AC	600	80	1	2	1
AC	600	80	3	3	1

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	1	35mm²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm²	Copper
flexible wire with sleeve	Max.	1	35mm²	Copper

Stripping length

Length (mm) --

14

Recommandations concernant le tournevis

Type	Value
Tournevis cruciforme	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm)

3

tightening torque (lb-in)

27

Approbations

Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

General Information

Text

- EMC Note: This device is suitable for use in environment A and B.
- Ne jamais lubrifier ou traiter les contacts.
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.

Marking



GB/T14048.3

General Information

Text

- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-VE

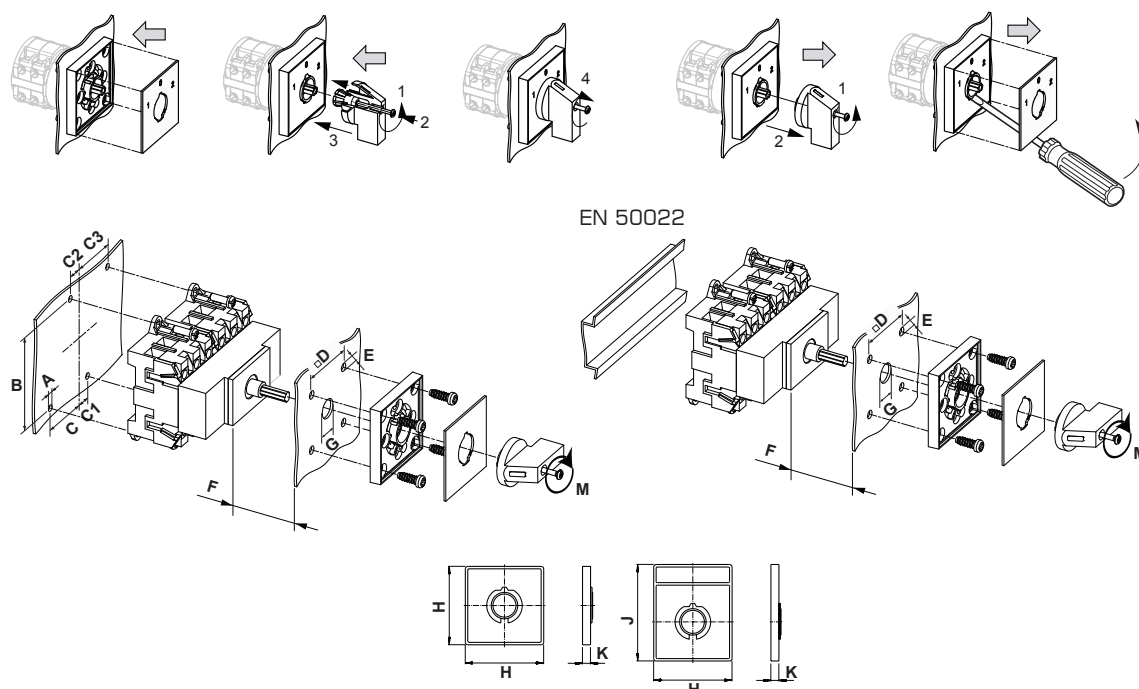


IP - Code front side	IP40
Stages	6,00 - 7,00
A	Ø 5,20 mm
B	H 90,00 mm
B_tol.	H ± 0,50 mm
C	H 47,50 mm
C_tol.	H ± 0,00 mm
C1	H 22,50 mm
D	□ 68,00 mm
E	Ø 6,00 mm
F	H ≤ 13,50 mm
G	Ø 10,00 - 15,00 mm
H	H 88,00 mm
J	H 124,00 mm
K	H 8,50 mm
M	M 1,20 Nm



Wiring diagram

KG80C.T306.VE

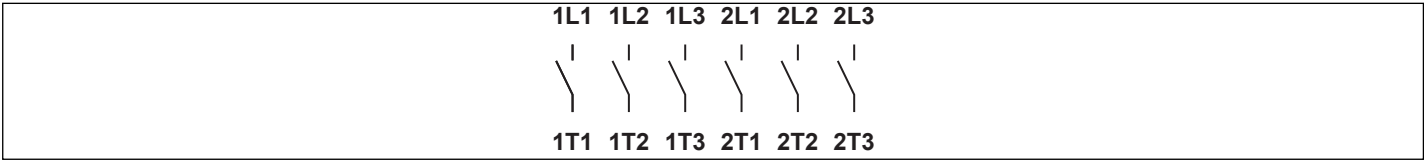



Switch program

KG80C.T306.VE



Kraus & Naimer


KG80C
T306
Page 1 of 1

Face Plate		1L1	1L2	1L3	2L1	2L2	2L3		
		1	3	5	7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		1T1	1T2	1T3	2T1	2T2	2T3		
0	270								
1	0								
	90								
	180								

Version: 117

Face plate

S2.F456/C10.V11

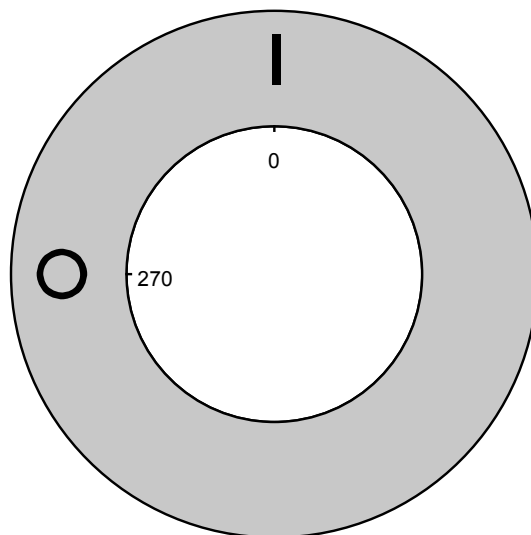



Sample image

PADLOCK DEVICE


with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)


Designation: S2.V840D/B7-J

Colour of F-handle ring: "B" electro-grey

Colour of face ring: "7" electro-grey

Type of mounting: "-J" for type of mounting VE for KG80C/KG100C

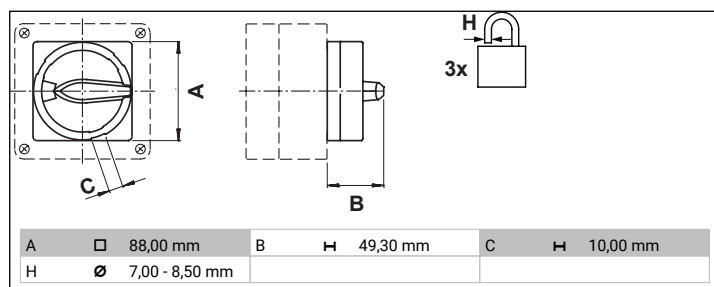



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)


Designation: S1.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch


Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF" splash proof (IP66/67)

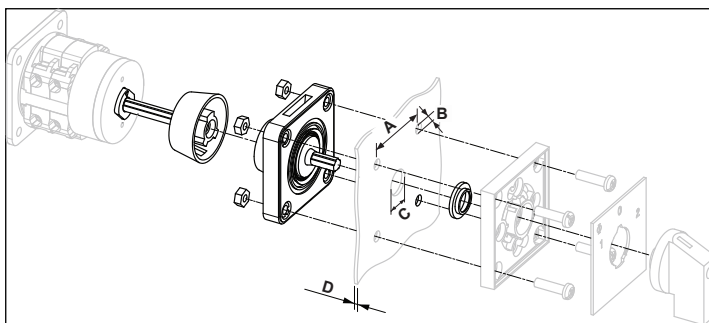

A	□	48,00 mm	B	∅	5,00 mm	C	∅	19,00 - 22,00 mm
D	H	4,00 mm						

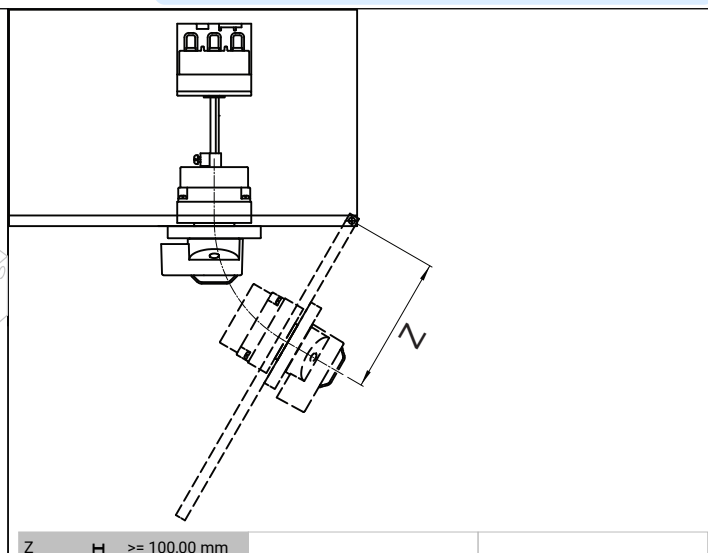


Z H ≥ 100,00 mm



S2D V840 10

S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

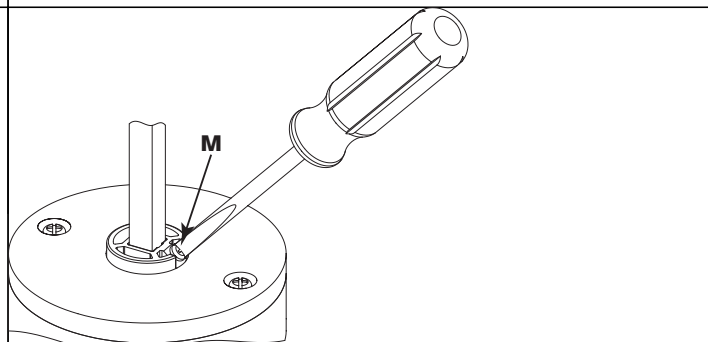

M $\vec{M}$ 0,80 Nm

1. Loosen the screw
2. Move shaft
3. Tighten the screw



Sample image

GROUND TERMINAL (PE)

for KG- and KH-Switches

Designation: K2.H052/C

Switch type: "C" for KG80 - KG100C

UL60947-4-1 , UL508

Nominal Voltage

Tension (V) AC / DC
600 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC
600 AC

Rated thermal current

Intensité (A) Température Ambiante (°) Additional Text
100 0 - 40 -

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	1	35mm ²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm ²	Copper
flexible wire with sleeve	Max.	1	35mm ²	Copper

Stripping length

Length (mm) -



Recommandations concernant le tournevis

Type	Value
Tournevis cruciforme	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
3	27

Approbations

Specification


CSA C.22.2 No.14

General Information


Text

- Use copper wire only. Do not coat the wire end with tin.

Marking

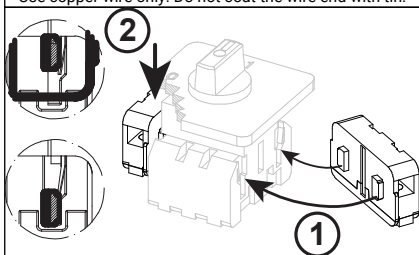

PE
PE

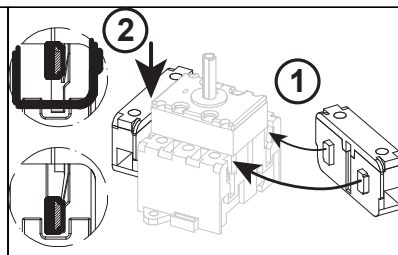

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K2.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage			
		Tension (V) AC / DC	
		690 AC	
Courant ininterrompu et thermique conventionnel lu/lth			
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire
16	55	60	Température ambiante +55°C durant 24 heures avec point à +60°C
Courant assigné d'emploi le			
Catégorie d'emploi	Tension (V)		Intensité (A)
AC-15	110 - 240		6
AC-15	380 - 440		3
AC-15	500		1,50
AC-21A	20 - 690		16

UL60947-4-1, UL508

Nominal Voltage			
		Tension (V) AC / DC	
		600 AC	
Tension assignée d'isolement Ui			
		Tension (V) AC / DC	
		600 AC	
Rated thermal current			
		Intensité (A)	Température Ambiante (°) Additional Text
		10	0 - 40 --
Pilot duty rating code			
Duty Code			
A600			
General Use			
AC / DC	Tension (V)	Intensité (A)	Nb de phases Nb de pôles No. of contacts in series
AC	600	10	1 1 1

GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,5mm ²	Copper
solid wire	Min.	2	0,5mm ²	Copper
flexible wire	Min.	1	0,75mm ²	Copper
flexible wire	Min.	2	0,75mm ²	Copper
flexible wire	Max.	2	2,5mm ²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,5mm ²	Copper
Stripping length				
Length (mm) --				
				
Recommandations concernant le tournevis				
Type	Value			
Tournevis cruciforme	PH1			
Slot screwdriver according to DIN 5264	0,8x4			
Tightening torque of screws				
			tightening torque (Nm)	tightening torque (lb-in)
			0.60	

General Information

Text

- Ne jamais lubrifier ou traiter les contacts.
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.

13	21
14	22