



Sample image

Datasheet

Article number: 70014971

Designation: CH10.A281.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Tension assignée d'isolement Ui				
Tension (V) AC / DC				
690 AC / DC				
Courant Ininterrompu et thermique conventionnel Iu/Ith				
Intensité (A)	Température Ambiante (*)	Température Maxi (*)	Spécification complémentaire	
20	55	60	Température ambiante +55°C durant 24 heures avec point à +60°C	
Courant assigné d'emploi Ie				
Catégorie d'emploi		Tension (V)		Intensité (A)
AC-15		220 - 240		6
AC-15		380 - 440		4
Puissance assignée d'emploi				
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)
AC-3	220 - 240	3	3	3
AC-3	380 - 440	3	3	5,50
AC-3	660 - 690	3	3	5,50
AC-3	220 - 240	1	2	2,20
AC-3	380 - 440	1	2	3
AC-23A	220 - 240	3	3	3,70
AC-23A	380 - 440	3	3	7,50
AC-23A	660 - 690	3	3	7,50
AC-23A	220 - 240	1	2	2,50
AC-23A	380 - 440	1	2	3,70
Protection par fusible (IEC)				
Caractéri		Nombre de fusible		Intensité (A)
gG		1		25
UL60947-4-1 , UL508				
Nominal Voltage				
Tension (V) AC / DC				
600 AC				
Tension assignée d'isolement Ui				
Tension (V) AC / DC				
600 AC				
Rated thermal current				
Intensité (A)		Température Ambiante (*) Additional Text		
20		0 - 40 --		
Horsepower rating				
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)
DOL	110 - 120	1	2	0,50
DOL	220 - 240	1	2	1
DOL	277 - 277	1	2	2
DOL	440 - 480	1	2	2
DOL	550 - 600	1	2	2
DOL	110 - 120	3	3	1,50
DOL	220 - 240	3	3	3
DOL	440 - 480	3	3	5
DOL	550 - 600	3	3	5
Pilot duty rating code				
Duty Code				
A600				
SCCR / Max. fuse rating				
Conditions of acceptability				
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.				
Temp. rating of wire				
Temperature rating (°C)		Intensité (A) Text		
60 - 75		-- Use copper wire only		
General Use				
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles
AC	277	20	1	1
AC	600	20	1	2
No. of contacts in series				
1				

General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	600	20	3	3	1	
CSA						
Nominal Voltage						
			Tension (V) AC / DC			
			600 AC			
Tension assignée d'isolement Ui						
			Tension (V) AC / DC			
			600 AC			
Rated thermal current						
		Intensité (A)			Température Ambiante (°)	Additional Text
		20			0 - 40	--
Horsepower rating						
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 120	1	2	0,50	40	
DOL	220 - 240	1	2	1	40	
DOL	277 - 277	1	2	2	40	
DOL	440 - 480	1	2	2	40	
DOL	550 - 600	1	2	2	40	
DOL	110 - 120	3	3	1,50	40	
DOL	220 - 240	3	3	3	40	
DOL	440 - 480	3	3	5	40	
DOL	550 - 600	3	3	5	40	
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
			Temperature rating (°C)			Intensité (A) Text
			75			-- --
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	20	1	1	1	
AC	600	20	1	2	1	
AC	600	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire	Min.	1	0,75mm²		Copper	
solid wire	Min.	2	0,75mm²		Copper	
flexible wire	Min.	1	0,75mm²		Copper	
flexible wire	Min.	2	0,75mm²		Copper	
flexible wire	Max.	2	AWG 12		Copper	
flexible wire	Max.	2	2,5mm²		Copper	
Single-core or stranded wire	Max.	2	AWG 10		Copper	
Single-core or stranded wire	Max.	2	4mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	1	0,75mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	2	0,75mm²		Copper	
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm²		Copper	
Stripping length						
			Length (mm) --			
						
			9			
Recommandations concernant le tournevis						
Type	Value					
Tournevis cruciforme	PH1					
Slot screwdriver according to DIN 5264	0,8x4					
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1		9	
Approbations						
Specification	Marking					
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
General Information						
Text						
- Ne jamais lubrifier ou traiter les contacts.						

General Information

Text

- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.
- Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-FT2

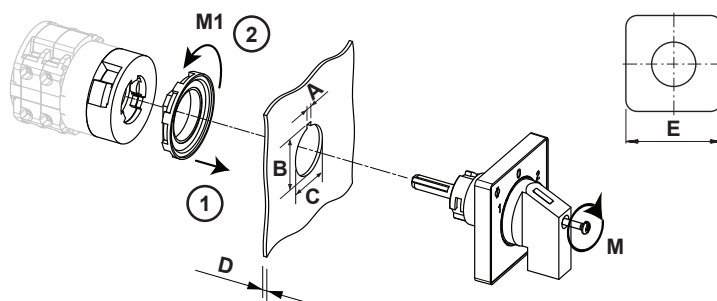


IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	M̄	0,50 Nm
M1	M̄	1,80 Nm



Wiring diagram

CH10.A281.FT2



Switch program

CH10.A281.FT2



Kraus & Naimer

CH10
A281
E


Page 1 of 1

Face Plate																									
		1		3		5		7		9		11		13		15		17		19		21		23	
																									
Switching Angle 45 Total switching Angle 135		2		4		6		8		10		12		14		16		18		20		22		24	
0		270																							
		285																							
		300																							
1		315																							
		330																							
		345																							
2		0																							
		15																							
		30																							
3		45																							
		60																							
		75																							
		90																							
		105																							
		120																							
		135																							
		150																							
		165																							
		180																							
		195																							
		210																							
		225																							
		240																							
		255																							

Version: 56

Face plate

S0.F109/A10.E1L

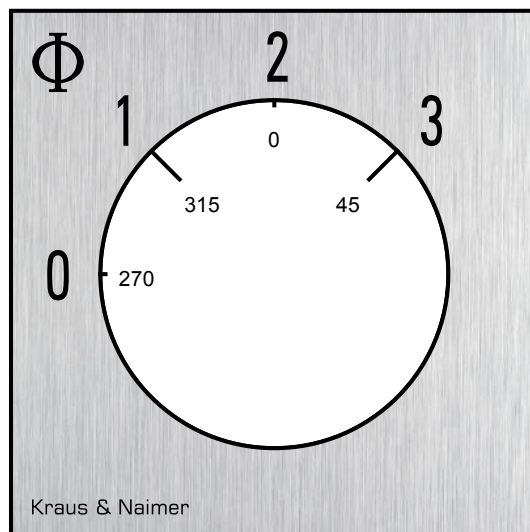

HANDLES

Designation: S0C.G251

Handle colour: "1" black

