

Sample image

Datasheet

Article number: 70023201

Designation: KG10A.T203/01.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
690 AC					
Courant Ininterrompu et thermique conventionnel Iu/Ith					
Intensité (A)	Température Ambiante (*)	Température Maxi (*)	Spécification complémentaire		
20	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C		
Courant assigné d'emploi Ie					
Catégorie d'emploi		Tension (V)		Intensité (A)	
AC-15		220 - 240		6	
AC-15		380 - 440		4	
Puissance assignée d'emploi					
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)	
AC-3	220 - 240	3	3	2,20	
AC-3	380 - 440	3	3	3,70	
AC-3	660 - 690	3	3	3,70	
AC-3	220 - 240	1	2	1,10	
AC-3	380 - 440	1	2	1,50	
AC-23A	220 - 240	3	3	3	
AC-23A	380 - 440	3	3	5,50	
AC-23A	660 - 690	3	3	5,50	
AC-23A	220 - 240	1	2	1,50	
AC-23A	380 - 440	1	2	2,20	
Protection par fusible (IEC)					
Caractéri			Nombre de fusible		Intensité (A)
gG			1		20
UL60947-4-1 , UL508					
Nominal Voltage					
Tension (V) AC / DC					
300 AC					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
300 AC					
Rated thermal current					
Intensité (A)		Température Ambiante (*)		Additional Text	
20		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 220	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	1	40
DOL	110 - 120	3	3	1	40
DOL	220 - 240	3	3	2	40
Pilot duty rating code					
Duty Code					
A300					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)		Intensité (A) Text			
60 - 75		-- Use copper wire only			
Connecting instructions					
Markings					
Break all lines.					
For use on a flat surface of a type 1 enclosure.					
General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	20	1	1	1
AC	300	20	1	2	1

General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	300	20	1	2	1
AC	300	20	3	3	1

General Information

Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA

Nominal Voltage

Tension (V) AC / DC
300 AC

Tension assignée d'isolement Ui

Tension (V) AC / DC
300 AC

Rated thermal current

Intensité (A) 20
Température Ambiante (°) 0 - 40 - Additional Text

Horsepower rating

Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 220	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	1	40
DOL	110 - 120	3	3	1	40
DOL	220 - 240	3	3	2	40

Pilot duty rating code

Duty Code

A300

Temp. rating of wire

Temperature rating (°C) 75
Intensité (A) Text -- --

General Use

AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	20	1	1	1
AC	277	20	3	3	1

GENERAL TECHNICAL INFORMATION

Tightening torque of screws

tightening torque (Nm) 0,60
tightening torque (lb-in) 5

Stripping length

Length (mm) --
8 STRIPPINGLENGTH

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,5mm²	Copper
solid wire	Min.	2	0,5mm²	Copper
flexible wire	Min.	1	0,75mm²	Copper
flexible wire	Min.	2	0,75mm²	Copper
flexible wire	Max.	1	AWG 12	Copper
flexible wire	Max.	1	2,5mm²	Copper
Single-core or stranded wire	Max.	1	AWG 12	Copper
Single-core or stranded wire	Max.	1	2,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	1	2,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,5mm²	Copper

Approbations

Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

Recommandations concernant le tournevis

Type	Value
Tournevis cruciforme	PH1
Slot screwdriver according to DIN 5264	0,8x4

General Information

Text

- Ne jamais lubrifier ou traiter les contacts.

Marking



General Information

Text

- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.
- Après mise en place des les commutateurs l'espace entre bor nes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-E

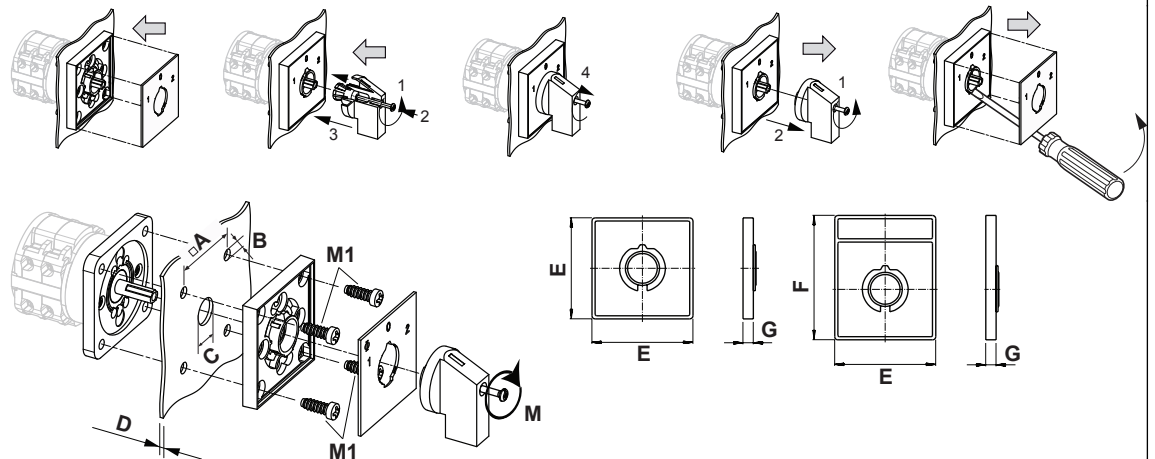


IP - Code front side		IP66, IP67
Stages		1,00 - 12,00
A	□	36,00 mm
B	∅	5,00 mm
C	∅	11,00 - 15,00 mm
D	H	≤ 4,00 mm
E	∅	48,00 mm
F	H	59,00 mm
G	H	6,30 mm
M	⌀	0,50 Nm
M1	⌀	0,90 Nm



Wiring diagram

KG10A.T303.E

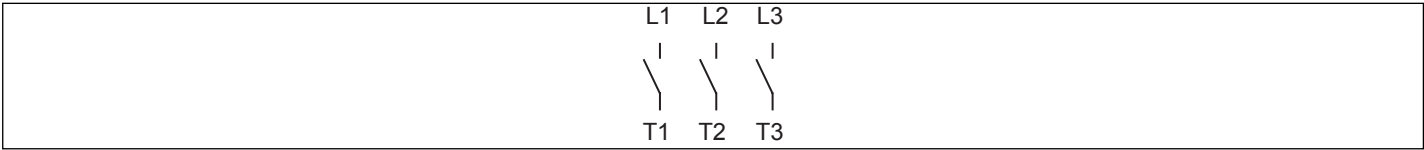


Switch program

KG10A.T303.E



Kraus & Naimer


KG10A **T303E** **Page 1 of 1**

Face Plate														
		T3	T1		T2									
		1	3	5	7	9	11	13	15	17	19	21	23	
		Marking plate: S0D H043 51A 												
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24	
		L3	L1		L2									
0	270													
	285													
	300													
	315													
	330													
	345													
	1	0												
		15												
		30												
		45												
		60												
		75												
		90												
		105												
		120												
		135												
		150												
		165												
		180												
		195												
210														
225														
240														
255														

Version: 2

Face plate

S0.F456/C10.V11

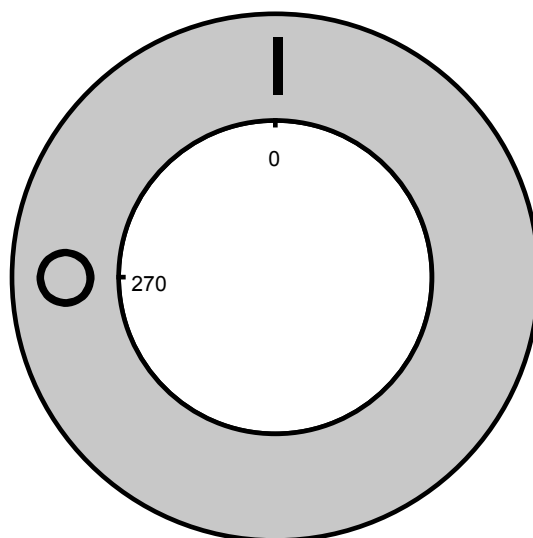



Sample image

PADLOCK DEVICE with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)

Designation: S0.V840D/D6

Colour of F-handle ring: "D" red

Colour of face ring: "6" yellow

