



Sample image

Datasheet

Article number: 70011009

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
定格絶縁電圧 Ui					
			電圧 (V) AC / DC		
			690 AC		
定格連続通電電流 Iu/Ith					
Current (A)	周囲温度 (°C)	ピーク温度 (°C) 追加要求事項			
20	50	55 周囲温度 +50°C、24 時間、ただし 瞬時ピーク温度 +55°C			
定格操作電流 Ie					
負荷種別				電圧 (V)	Current (A)
AC-15				220 - 240	6
AC-15				380 - 440	4
定格操作電力					
負荷種別	電圧 (V)	相数	極数	電力 (kW)	
AC-3	220 - 240	3	3	2,20	
AC-3	380 - 440	3	3	3,70	
AC-3	660 - 690	3	3	3,70	
AC-3	220 - 240	1	2	1,10	
AC-3	380 - 440	1	2	1,50	
AC-23A	220 - 240	3	3	3	
AC-23A	380 - 440	3	3	5,50	
AC-23A	660 - 690	3	3	5,50	
AC-23A	220 - 240	1	2	1,50	
AC-23A	380 - 440	1	2	2,20	
最大ヒューズ定格 IEC					
ヒューズ特性				ヒューズ数	Current (A)
gG				1	20
UL60947-4-1, UL508					
Nominal Voltage					
			電圧 (V) AC / DC		
			300 AC		
定格絶縁電圧 Ui					
			電圧 (V) AC / DC		
			300 AC		
定格熱電流					
Current (A)		周囲温度 (°C) 備考			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	電圧 (V)	相数	極数	Power (HP)	Ambient temperature [°C]
DOL	110 - 220	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	1	40
DOL	110 - 120	3	3	1	40
DOL	220 - 240	3	3	2	40
Pilot duty rating code					
Duty Code					
A300					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			-- Use copper wire only		
Connecting instructions					
Markings					
Break all lines.					
For use on a flat surface of a type 1 enclosure.					
General Use					
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series
AC	277	20	1	1	1

注意事項

備考

- スイッチの取り付け、接続、操作の設定は、技術的に認められた規則に従って、有資格者のみが行うことができます。
- 銅線のみを使用してください。電線を半田付けしないでください。
- ジャンパー線(コモン線)に接続された端子ネジは工場出荷時には仮締め状態となっています。ジャンパー線(コモン線)に接続された端子ネジの締め付けを含む全ての端子ネジが、必ず適切なトルクで締められていることをご確認の上、ご使用ください。
- スイッチの設置後、端子間の間隔は、適用される規格の要件を満たすのに十分なものでなければなりません。

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

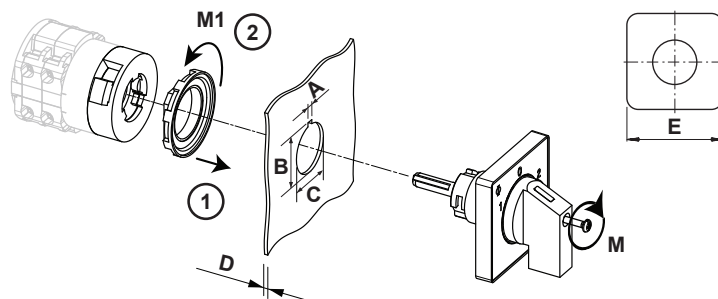


IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+ _tol.	H	0,20 mm
A- _tol.	H	0,00 mm
B	H	24,10 mm
B+ _tol.	H	0,40 mm
B- _tol.	H	0,00 mm
C	Ø	22,30 mm
C+ _tol.	Ø	0,40 mm
C- _tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm



Wiring diagram

KG10A.T302.FT2

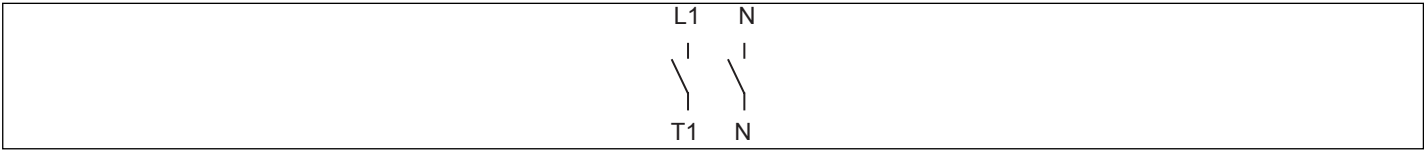

Switch program

KG10A.T302.FT2



Kraus & Naimer


KG10A
T302E
Page 1 of 1

Face Plate														
	N	T1												
	1	3	5	7	9	11	13	15	17	19	21	23		
			Marking plate: S0D H043 51F											
														
Switching Angle	90		2	4	6	8	10	12	14	16	18	20	22	24
Total switching Angle	90		N	L1										
0	270													
	285													
	300													
	315													
	330													
	345													
1	0													
	15													
	30													
	45													
	60													
	75													
	90													
	105													
	120													
	135													
	150													
	165													
	180													
	195													
	210													
	225													
	240													
	255													

Version: 2

Face plate

S0.F456/A10.E1LH

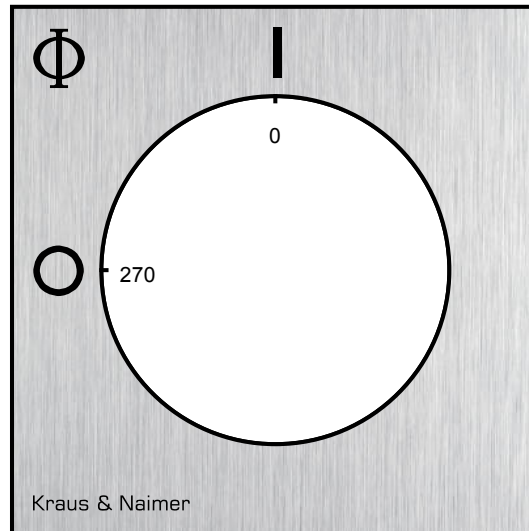

PADLOCK DEVICE

Designation: S0.V845/A11/D11

Face plate and handle unit: "A" face plate/alu, frame/black, handle/black, locking push rod/red

Locking position: "1" at 09:00/03:00 - knockouts every 45°

Angular displacement: "1" 1 x 90°

Type of mounting: "D" for type of mounting *FT2 (for switches in size S0 and S00)

Type of version: "1" for same switch size

Switch type: "1" for C-switches and for KG10.

