

Sample image

Datasheet

Article number: 70012799

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
定格絶縁電圧 U_i					
電圧 (V) AC / DC					
690 AC					
定格連続通電電流 I_u/I_{th}					
Current (A)	周囲温度 (°C)	ピーク温度 (°C) 追加要求事項			
32	50	55 周囲温度 +50°C、24 時間、ただし 瞬時ピーク温度 +55°C			
定格操作電流 I_e					
負荷種別	電圧 (V)				Current (A)
AC-32A	20 - 400				32
定格操作電力					
負荷種別	電圧 (V)	相数	極数	電力 (kW)	
AC-3	220 - 240	3	3	5,50	
AC-3	380 - 440	3	3	7,50	
AC-3	660 - 690	3	3	7,50	
AC-23A	220 - 240	3	3	5,50	
AC-23A	380 - 440	3	3	11	
AC-23A	660 - 690	3	3	11	
最大ヒューズ定格 IEC					
ヒューズ特性	ヒューズ数				Current (A)
gG	1				35
UL60947-4-1, UL508					
Nominal Voltage					
電圧 (V) AC / DC					
600 AC					
定格絶縁電圧 U_i					
電圧 (V) AC / DC					
600 AC					
定格熱電流		Current (A)	周囲温度 (°C) 備考		
		30	0 - 40 --		
Horsepower rating					
Across-the-Line Motor Starting	電圧 (V)	相数	極数	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	1,50	40
DOL	200 - 208	1	2	3	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	5	40
DOL	415 - 415	1	2	5	40
DOL	440 - 480	1	2	7,50	40
DOL	550 - 600	1	2	7,50	40
DOL	110 - 120	3	3	3	40
DOL	200 - 240	3	3	10	40
DOL	415 - 415	3	3	10	40
DOL	440 - 480	3	3	20	40
DOL	550 - 600	3	3	25	40
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)		Current (A) Text			
60 - 75		-- --			
General Use					
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series
AC	277	30	1	1	1
AC	600	30	1	2	1
AC	600	30	3	3	

注意事項
備考

- 手動モータ制御装置に使用する操作ハンドル及び位置指示手段は、製造業者から提供されるか、又は使用する操作ハンドル及び位置指示手段は、あらかじめ手動モータ制御装置と組み合わせて評価されている必要がある。
- モータ断路器として使用する場合は、装置にはOFF位置でロックする方法を設けなければならない。

CSA
Nominal Voltage

電圧 (V) AC / DC
600 AC

定格絶縁電圧 Ui

電圧 (V) AC / DC
600 AC

定格熱電流

Current (A) 30 周囲温度 (°C) 備考
0 - 40 --

Horsepower rating

Across-the-Line Motor Starting	電圧 (V)	相数	極数	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	1,50	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	5	40
DOL	415 - 415	1	2	5	40
DOL	440 - 480	1	2	7,50	40
DOL	550 - 600	1	2	7,50	40
DOL	110 - 120	3	3	3	40
DOL	220 - 240	3	3	10	40
DOL	415 - 415	3	3	10	40
DOL	440 - 480	3	3	20	40
DOL	550 - 600	3	3	25	40

Pilot duty rating code
Duty Code

A600

Temp. rating of wire

Temperature rating (°C) 75 Current (A) Text
-- --

General Use

AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series
AC	277	30	1	1	1
AC	600	30	1	2	1
AC	600	30	3	3	1

GENERAL TECHNICAL INFORMATION
電線サイズ

電線種別	最小値 / 最大値	1端子当たりの配線数	断面積 (mm²) or (AWG/kcmil)	電線材料
細燃線	最大	1	AWG 10	銅
細燃線	最大	1	4mm²	銅
単線または荒燃線	最大	1	6mm²	銅
単線または荒燃線	最大	1	AWG 10	銅
スリーブ端子適用の細燃線	最大	1	4mm²	銅

Stripping length

Length (mm) --


Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH2
Slot screwdriver according to DIN 5264	0,8x4

端子ネジ締付トルク

締付トルク (Nm)	締付トルク (lb-in)
1,25	11

認証
仕様

マーキング

EAC



CEマーキング



UK Directives



CSA C.22.2 No.14



GB/T14048.3


注意事項
備考

- EMC Note: This device is suitable for use in environment A and B.
- 接点に潤滑剤を塗布したり、表面処理をしたりしないでください。
- スイッチの取り付け、接続、操作の設定は、技術的に認められた規則に従って、有資格者のみが行うことができます。

注意事項

備考

- 銅線のみを使用してください。電線を半田付けしないでください。
- ジャンパー線(コモン線)に接続された端子ネジは工場出荷時には仮締め状態となっています。ジャンパー線(コモン線)に接続された端子ネジの締め付けを含む全ての端子ネジが、必ず適切なトルクで締められていることをご確認の上、ご使用ください。

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE

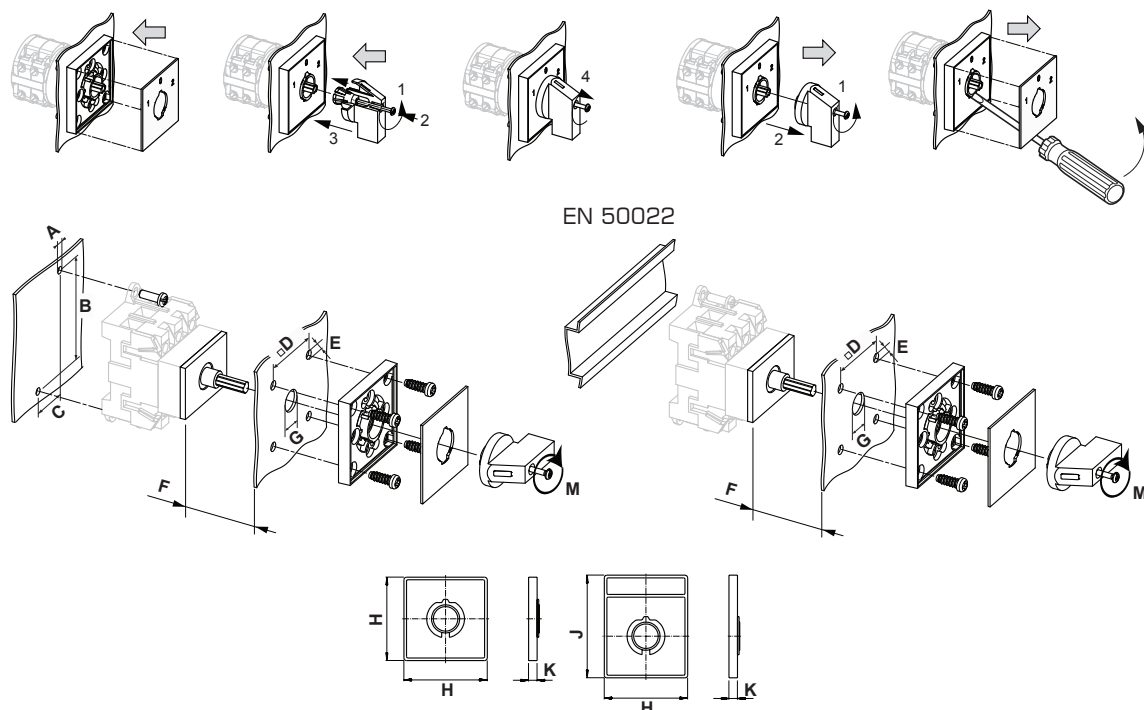

IP - Code front side	IP40
Stages	1,00 - 5,00
A	Ø 4,10 mm
B	H 60,00 mm
B-tol.	H ± 0,50 mm
C	H 22,50 mm
C-tol.	H ± 0,50 mm
D	□ 48,00 mm
E	Ø 5,00 mm
F	H ≤ 13,50 mm
G	Ø 10,00 - 15,00 mm
H	H 64,00 mm
J	H 78,00 mm
K	H 7,40 mm
M	M̃ 0,70 Nm



Wiring diagram

KG32B.T303.VE



Switch program

KG32B.T303.VE



Kraus & Naimer


KG32B
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0	■	■	■					
	90								
	180								

Version: 102

Face plate

S1.F456/C10.V11H

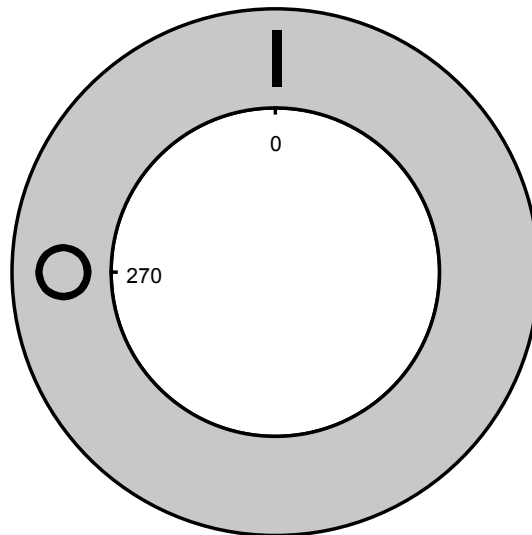



Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/A71/B2



Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Locking position: "1" at 270° (1x90°)

Type of mounting: "B" for type of mounting VE

Switch type: "2" for KA-, KG- and KH(R)-switches

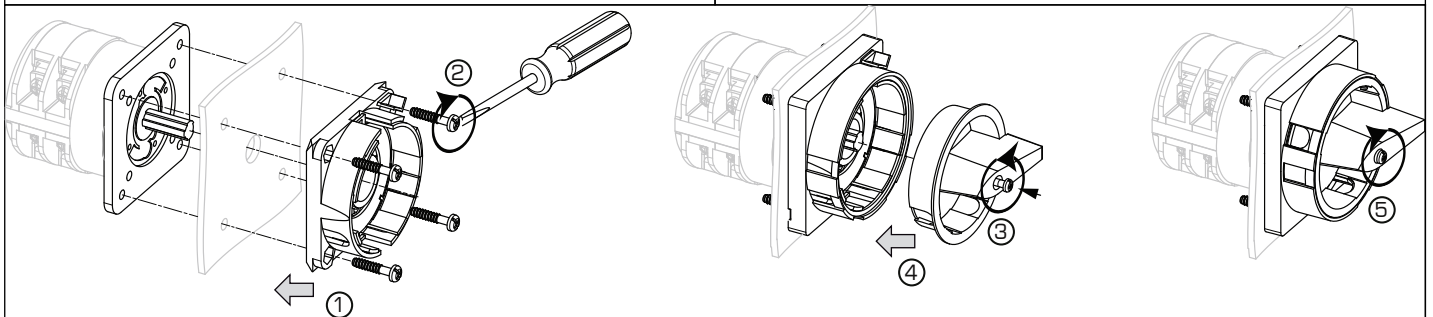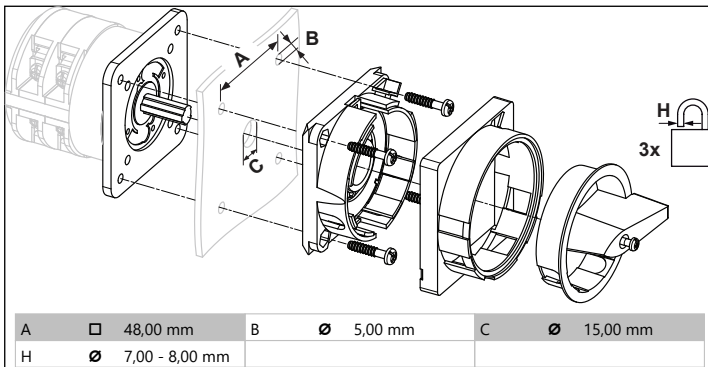


MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.

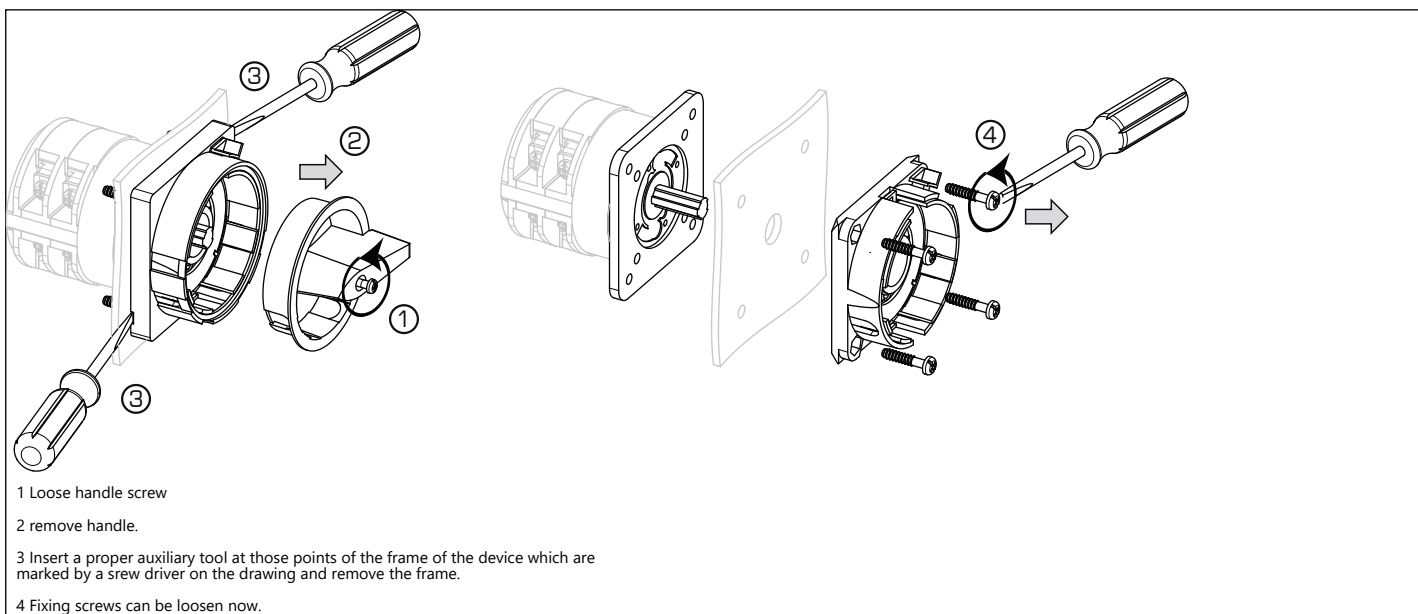



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)

Designation: S1.M280E/B21S-EF/1

Type of interlock: "B2" with protected profile and interlock by door clutch

Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF/1" splash proof (IP66/67) for next smaller switch size

