

Sample image

Datasheet

Article number: 70025937

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
定格絶縁電圧 Ui					
電圧 (V) AC / DC					
690 AC / DC					
定格連続通電電流 Iu/Ith					
Current (A)	周囲温度 (°C)	ピーク温度 (°C)	追加要求事項		
20	55	60	周囲温度 +55°C、24 時間、ただし 瞬時ピーク温度 +60°C		
定格操作電流 Ie					
負荷種別	電圧 (V)				Current (A)
AC-15	220 - 240				6
AC-15	380 - 440				4
定格操作電力					
負荷種別	電圧 (V)	相数	極数	電力 (kW)	
AC-3	220 - 240	3	3	3	
AC-3	380 - 440	3	3	5,50	
AC-3	660 - 690	3	3	5,50	
AC-3	220 - 240	1	2	2,20	
AC-3	380 - 440	1	2	3	
AC-23A	220 - 240	3	3	3,70	
AC-23A	380 - 440	3	3	7,50	
AC-23A	660 - 690	3	3	7,50	
AC-23A	220 - 240	1	2	2,50	
AC-23A	380 - 440	1	2	3,70	
最大ヒューズ定格 IEC					
ヒューズ特性	ヒューズ数				Current (A)
gG	1				25
UL60947-4-1, UL508					
Nominal Voltage					
電圧 (V) AC / DC					
600 AC					
定格絶縁電圧 Ui					
電圧 (V) AC / DC					
600 AC					
定格熱電流					
Current (A)		周囲温度 (°C) 備考			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	電圧 (V)	相数	極数	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.					
Temp. rating of wire					
Temperature rating (°C)		Current (A) Text			
60 - 75		-- Use copper wire only			
General Use					
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series
AC	277	20	1	1	1
AC	600	20	1	2	1

General Use						
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series	
AC	600	20	3	3	1	
CSA						
Nominal Voltage						
			電圧 (V) AC / DC			
			600 AC			
定格絶縁電圧 Ui						
			電圧 (V) AC / DC			
			600 AC			
定格熱電流						
		Current (A)			周囲温度 (°C) 備考	
		20			0 - 40 --	
Horsepower rating						
Across-the-Line Motor Starting			電圧 (V)	相数	極数	Power (HP)
DOL			110 - 120	1	2	0,50
DOL			220 - 240	1	2	1
DOL			277 - 277	1	2	2
DOL			440 - 480	1	2	2
DOL			550 - 600	1	2	2
DOL			110 - 120	3	3	1,50
DOL			220 - 240	3	3	3
DOL			440 - 480	3	3	5
DOL			550 - 600	3	3	5
Ambient temperature [°C]						
						40
						40
						40
						40
						40
						40
						40
						40
						40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
		Temperature rating (°C)			Current (A)	Text
		75			--	--
General Use						
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series	
AC	277	20	1	1	1	
AC	600	20	1	2	1	
AC	600	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
端子ネジ締付トルク						
			締付トルク (Nm)		締付トルク (lb-in)	
			1		9	
Stripping length						
			Length (mm) --			
			9 STRIPPINGLENGTH			
電線サイズ						
電線種別	最小値 / 最大値		1端子当たりの配線数		断面積 (mm²) or (AWG/kcmil)	電線材料
単線	最小		1		0.75mm²	銅
単線	最小		2		0.75mm²	銅
細撚線	最小		1		0.75mm²	銅
細撚線	最小		2		0.75mm²	銅
細撚線	最大		2		AWG 12	銅
細撚線	最大		2		2.5mm²	銅
単線または荒撚線	最大		2		AWG 10	銅
単線または荒撚線	最大		2		4mm²	銅
DIN46228規格フェール適用の細撚線	最小		1		0.75mm²	銅
DIN46228規格フェール適用の細撚線	最小		2		0.75mm²	銅
DIN46228規格フェール適用の細撚線	最大		2		2.5mm²	銅
認証						
仕様						
マーキング						
EAC						
EAC						
CEマーキング						
CE						
UK Directives						
UK CA						
CSA C.22.2 No.14						
CSA						
GB/T14048.3						
CCC						
GB/T14048.3						
Recommended screw driver						
Type of screw driver			Value			
Cross Screwdriver			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
注意事項						
備考						
- 接点に潤滑剤を塗布したり、表面処理をしたりしないでください。						

注意事項

備考

- スイッチの取り付け、接続、操作の設定は、技術的に認められた規則に従って、有資格者のみが行うことができます。
- 銅線のみを使用してください。電線を半田付けしないでください。
- ジャンパー線(コモン線)に接続された端子ネジは工場出荷時には仮締め状態となっています。ジャンパー線(コモン線)に接続された端子ネジの締め付けを含む全ての端子ネジが、必ず適切なトルクで締められていることをご確認の上、ご使用ください。
- スイッチの設置後、端子間の間隔は、適用される規格の要件を満たすのに十分なものでなければなりません。

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

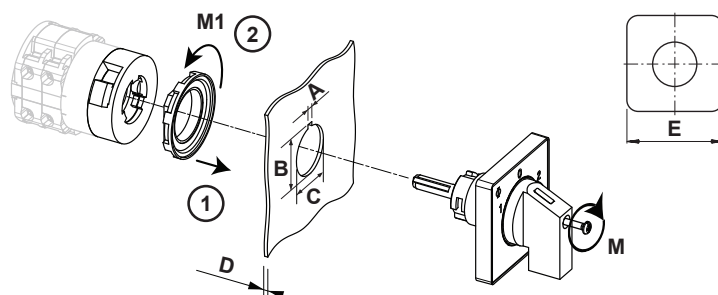

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+ _tol.	H	0,20 mm
A- _tol.	H	0,00 mm
B	H	24,10 mm
B+ _tol.	H	0,40 mm
B- _tol.	H	0,00 mm
C	Ø	22,30 mm
C+ _tol.	Ø	0,40 mm
C- _tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm

Wiring diagram

CH10.A220.FT2



Switch program

CH10.A220.FT2



Kraus & Naimer


CH10
A220
Page 1 of 1


Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
Switching Angle	60	2	4	6	8	10	12	14	16	18	20	22	24
Total switching Angle	60												
1	330												
	345												
	0												
	15												
2	30												
	45												
	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												
	270												
	285												
	300												
	315												

Version: 106

Face plate

S0.F072/A10.E1L

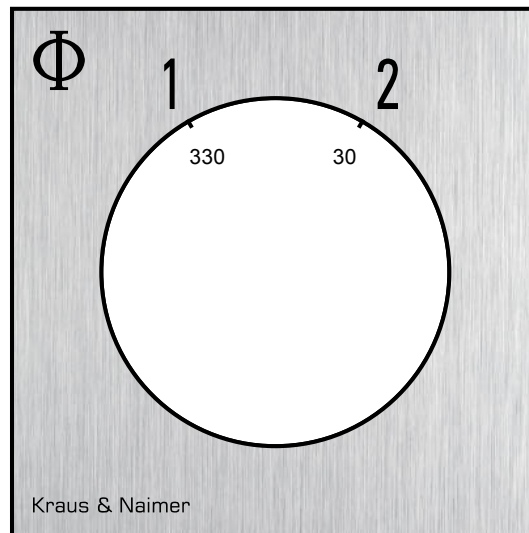



Sample image

KEY-LOCK DEVICE with small cylinder lock (Eurolock-Lock) for type of mounting FT, *FT1, *FT2, *FT6, *FH3, *FH4, *VE1F, *VE21

Designation: S0.V750D/3J/21

Lock cylinder: "3" lock cylinder S0 (KN 101)

Locking program: "J"

09:00+11:00+01:00+03:00+05:00+07:00

Type of mounting: "2" for type of mounting

*FT2/*FT2-V (22 mm)

Colour of face plate frame: "1" black (not for type
of mounting *VE21)

