



Sample image

## Datasheet

**Article number:** 70009022

**Designation:** CA10.A007.FT2.F785

**Description:** Switch

|                                                                                                                                                                                                                                                                                                                                                                                                          |                          |                          |                                                                     |                                                          |                     |                      |                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|---------------------------------------------------------------------|----------------------------------------------------------|---------------------|----------------------|--------------------------|
| IEC 60947-3 EN 60947-3, VDE 0660 Teil 107                                                                                                                                                                                                                                                                                                                                                                |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Rated insulation voltage Ui                                                                                                                                                                                                                                                                                                                                                                              |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Voltage (V) AC / DC                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          |                                                                     |                                                          |                     |                      |                          |
| 690 AC / DC                                                                                                                                                                                                                                                                                                                                                                                              |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Rated impulse withstand voltage Uimp                                                                                                                                                                                                                                                                                                                                                                     |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Voltage (kV)                                                                                                                                                                                                                                                                                                                                                                                             |                          | Overvoltage category     | Pollution degree                                                    | Supply system                                            | Function            |                      |                          |
| 4                                                                                                                                                                                                                                                                                                                                                                                                        |                          | III                      | 3                                                                   | Valid for lines with grounded common neutral termination | Switch disconnecter |                      |                          |
| Rated uninterrupted current Iu/Ith                                                                                                                                                                                                                                                                                                                                                                       |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Current (A)                                                                                                                                                                                                                                                                                                                                                                                              | Ambient temperature (°C) |                          | Peak temperature (°C) additional requirements                       |                                                          |                     |                      |                          |
| 20                                                                                                                                                                                                                                                                                                                                                                                                       | 55                       |                          | 60 Ambient temperature +55°C during 24 hours with peaks up to +60°C |                                                          |                     |                      |                          |
| Rated operational current Ie                                                                                                                                                                                                                                                                                                                                                                             |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Utilization category                                                                                                                                                                                                                                                                                                                                                                                     |                          |                          | Voltage (V)                                                         |                                                          | Current (A)         |                      |                          |
| AC-15                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                          | 220 - 240                                                           |                                                          | 6                   |                      |                          |
| AC-15                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                          | 380 - 440                                                           |                                                          | 4                   |                      |                          |
| Rated operational power                                                                                                                                                                                                                                                                                                                                                                                  |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Utilization category                                                                                                                                                                                                                                                                                                                                                                                     |                          | Voltage (V)              | No. of phases                                                       | No. of poles                                             | Power (kW)          |                      |                          |
| AC-3                                                                                                                                                                                                                                                                                                                                                                                                     |                          | 220 - 240                | 3                                                                   | 3                                                        | 3                   |                      |                          |
| AC-3                                                                                                                                                                                                                                                                                                                                                                                                     |                          | 380 - 440                | 3                                                                   | 3                                                        | 5,50                |                      |                          |
| AC-3                                                                                                                                                                                                                                                                                                                                                                                                     |                          | 660 - 690                | 3                                                                   | 3                                                        | 5,50                |                      |                          |
| AC-3                                                                                                                                                                                                                                                                                                                                                                                                     |                          | 220 - 240                | 1                                                                   | 2                                                        | 2,20                |                      |                          |
| AC-3                                                                                                                                                                                                                                                                                                                                                                                                     |                          | 380 - 440                | 1                                                                   | 2                                                        | 3                   |                      |                          |
| AC-23A                                                                                                                                                                                                                                                                                                                                                                                                   |                          | 220 - 240                | 3                                                                   | 3                                                        | 3,70                |                      |                          |
| AC-23A                                                                                                                                                                                                                                                                                                                                                                                                   |                          | 380 - 440                | 3                                                                   | 3                                                        | 7,50                |                      |                          |
| AC-23A                                                                                                                                                                                                                                                                                                                                                                                                   |                          | 660 - 690                | 3                                                                   | 3                                                        | 7,50                |                      |                          |
| AC-23A                                                                                                                                                                                                                                                                                                                                                                                                   |                          | 220 - 240                | 1                                                                   | 2                                                        | 2,50                |                      |                          |
| AC-23A                                                                                                                                                                                                                                                                                                                                                                                                   |                          | 380 - 440                | 1                                                                   | 2                                                        | 3,70                |                      |                          |
| Max Fuse Rating IEC                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Fuse characteristic                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          | No. of Fuses                                                        |                                                          | Current (A)         |                      |                          |
| gG                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                          | 1                                                                   |                                                          | 25                  |                      |                          |
| UL60947-4-1 , UL508                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Nominal Voltage                                                                                                                                                                                                                                                                                                                                                                                          |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Voltage (V) AC / DC                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          |                                                                     |                                                          |                     |                      |                          |
| 300 AC / DC                                                                                                                                                                                                                                                                                                                                                                                              |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Rated insulation voltage Ui                                                                                                                                                                                                                                                                                                                                                                              |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Voltage (V) AC / DC                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          |                                                                     |                                                          |                     |                      |                          |
| 300 AC                                                                                                                                                                                                                                                                                                                                                                                                   |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Rated thermal current                                                                                                                                                                                                                                                                                                                                                                                    |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Current (A)                                                                                                                                                                                                                                                                                                                                                                                              |                          | Ambient temperature (°C) |                                                                     | Additional Text                                          |                     |                      |                          |
| 20                                                                                                                                                                                                                                                                                                                                                                                                       |                          | 0 - 40                   |                                                                     | --                                                       |                     |                      |                          |
| Horsepower rating                                                                                                                                                                                                                                                                                                                                                                                        |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Across-the-Line Motor Starting                                                                                                                                                                                                                                                                                                                                                                           |                          |                          | Voltage (V)                                                         | No. of phases                                            | No. of poles        | Power (HP)           | Ambient temperature [°C] |
| Reversing                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          | 110 - 120                                                           | 1                                                        | 2                   | 0,17                 | 40                       |
| Reversing                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          | 220 - 240                                                           | 1                                                        | 2                   | 0,50                 | 40                       |
| Reversing                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          | 277 - 277                                                           | 1                                                        | 2                   | 0,60                 | 40                       |
| Reversing                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          | 110 - 120                                                           | 3                                                        | 3                   | 0,50                 | 40                       |
| Reversing                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          | 220 - 240                                                           | 3                                                        | 3                   | 1                    | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          | 110 - 120                                                           | 1                                                        | 2                   | 0,50                 | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          | 220 - 240                                                           | 1                                                        | 2                   | 1                    | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          | 277 - 277                                                           | 1                                                        | 2                   | 2                    | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          | 110 - 120                                                           | 3                                                        | 3                   | 1,50                 | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                          | 220 - 240                                                           | 3                                                        | 3                   | 3                    | 40                       |
| Pilot duty rating code                                                                                                                                                                                                                                                                                                                                                                                   |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Duty Code                                                                                                                                                                                                                                                                                                                                                                                                |                          |                          |                                                                     |                                                          |                     |                      |                          |
| A300                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                          |                                                                     |                                                          |                     |                      |                          |
| SCCR / Max. fuse rating                                                                                                                                                                                                                                                                                                                                                                                  |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Conditions of acceptability                                                                                                                                                                                                                                                                                                                                                                              |                          |                          |                                                                     |                                                          |                     |                      |                          |
| These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses. |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Temp. rating of wire                                                                                                                                                                                                                                                                                                                                                                                     |                          |                          |                                                                     |                                                          |                     |                      |                          |
| Temperature rating (°C)                                                                                                                                                                                                                                                                                                                                                                                  |                          |                          | Current (A)                                                         |                                                          |                     | Text                 |                          |
| 60 - 75                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                          | --                                                                  |                                                          |                     | Use copper wire only |                          |

|                                                                                                                                      |                   |                               |                          |                                    |                           |              |
|--------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------|--------------------------|------------------------------------|---------------------------|--------------|
| Connecting instructions                                                                                                              |                   |                               |                          |                                    |                           |              |
| Markings                                                                                                                             |                   |                               |                          |                                    |                           |              |
| When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.        |                   |                               |                          |                                    |                           |              |
| General Use                                                                                                                          |                   |                               |                          |                                    |                           |              |
| AC / DC                                                                                                                              | Voltage (V)       | Current (A)                   | No. of phases            | No. of poles                       | No. of contacts in series |              |
| AC                                                                                                                                   | 300               | 20                            | 1                        | 2                                  | 1                         |              |
| AC                                                                                                                                   | 300               | 20                            | 3                        | 3                                  | 1                         |              |
| CSA                                                                                                                                  |                   |                               |                          |                                    |                           |              |
| Nominal Voltage                                                                                                                      |                   |                               |                          |                                    |                           |              |
|                                                                                                                                      |                   |                               |                          | Voltage (V) AC / DC                |                           |              |
|                                                                                                                                      |                   |                               |                          | 300 AC                             |                           |              |
| Rated insulation voltage Ui                                                                                                          |                   |                               |                          |                                    |                           |              |
|                                                                                                                                      |                   |                               |                          | Voltage (V) AC / DC                |                           |              |
|                                                                                                                                      |                   |                               |                          | 300 AC                             |                           |              |
| Rated thermal current                                                                                                                |                   |                               |                          |                                    |                           |              |
|                                                                                                                                      |                   | Current (A)                   | Ambient temperature (°C) |                                    | Additional Text           |              |
|                                                                                                                                      |                   | 20                            | 0 - 40 --                |                                    |                           |              |
| Horsepower rating                                                                                                                    |                   |                               |                          |                                    |                           |              |
| Across-the-Line Motor Starting                                                                                                       |                   |                               |                          | Voltage (V)                        | No. of phases             | No. of poles |
|                                                                                                                                      |                   |                               |                          | 110 - 120                          | 1                         | 2            |
| DOL                                                                                                                                  |                   |                               |                          | 220 - 240                          | 1                         | 2            |
| DOL                                                                                                                                  |                   |                               |                          | 277 - 277                          | 1                         | 2            |
| DOL                                                                                                                                  |                   |                               |                          | 110 - 120                          | 3                         | 3            |
| DOL                                                                                                                                  |                   |                               |                          | 220 - 240                          | 3                         | 3            |
|                                                                                                                                      |                   |                               |                          |                                    |                           |              |
| Pilot duty rating code                                                                                                               |                   |                               |                          |                                    |                           |              |
| Duty Code                                                                                                                            |                   |                               |                          |                                    |                           |              |
| A300                                                                                                                                 |                   |                               |                          |                                    |                           |              |
| Temp. rating of wire                                                                                                                 |                   |                               |                          |                                    |                           |              |
|                                                                                                                                      |                   | Temperature rating (°C)       | Current (A)              |                                    | Text                      |              |
|                                                                                                                                      |                   | 75                            | --                       |                                    | only                      |              |
| General Use                                                                                                                          |                   |                               |                          |                                    |                           |              |
| AC / DC                                                                                                                              | Voltage (V)       | Current (A)                   | No. of phases            | No. of poles                       | No. of contacts in series |              |
| AC                                                                                                                                   | 300               | 20                            | 1                        | 1                                  | 1                         |              |
| GENERAL TECHNICAL INFORMATION                                                                                                        |                   |                               |                          |                                    |                           |              |
| Tightening torque of screws                                                                                                          |                   |                               |                          |                                    |                           |              |
|                                                                                                                                      |                   |                               |                          | tightening torque (Nm)             | tightening torque (lb-in) |              |
|                                                                                                                                      |                   |                               |                          | 0,60                               | 5                         |              |
| Stripping length                                                                                                                     |                   |                               |                          |                                    |                           |              |
|                                                                                                                                      |                   |                               |                          | Length (mm) --                     |                           |              |
|                                                                                                                                      |                   |                               |                          | 8 STRIPPINGLENGTH                  |                           |              |
| Size of conductor                                                                                                                    |                   |                               |                          |                                    |                           |              |
| composition of conductor                                                                                                             | Min. / Max. value | No. of conductor per terminal |                          | Cross section (mm²) or (AWG/kcmil) | Material of the wire      |              |
| solid wire                                                                                                                           | Min.              | 1                             |                          | 0.5mm²                             | Copper                    |              |
| solid wire                                                                                                                           | Min.              | 2                             |                          | 0.5mm²                             | Copper                    |              |
| flexible wire                                                                                                                        | Min.              | 1                             |                          | 0.75mm²                            | Copper                    |              |
| flexible wire                                                                                                                        | Min.              | 2                             |                          | 0.75mm²                            | Copper                    |              |
| flexible wire                                                                                                                        | Max.              | 2                             |                          | 2.5mm²                             | Copper                    |              |
| flexible wire                                                                                                                        | Max.              | 2                             |                          | AWG 14                             | Copper                    |              |
| Single-core or stranded wire                                                                                                         | Max.              | 2                             |                          | AWG 12                             | Copper                    |              |
| Single-core or stranded wire                                                                                                         | Max.              | 2                             |                          | 2.5mm²                             | Copper                    |              |
| flexible wire with ferrule according to DIN 46228                                                                                    | Min.              | 1                             |                          | 0.5mm²                             | Copper                    |              |
| flexible wire with ferrule according to DIN 46228                                                                                    | Max.              | 2                             |                          | 2.5mm²                             | Copper                    |              |
| flexible wire with ferrule according to DIN 46228                                                                                    | Min.              | 2                             |                          | 0.5mm²                             | Copper                    |              |
| Approbations                                                                                                                         |                   |                               |                          |                                    |                           |              |
| Specification                                                                                                                        |                   |                               |                          |                                    |                           |              |
| Marking                                                                                                                              |                   |                               |                          |                                    |                           |              |
| EAC                                                                                                                                  |                   |                               |                          |                                    |                           |              |
| CE marking                                                                                                                           |                   |                               |                          |                                    |                           |              |
| UK Directives                                                                                                                        |                   |                               |                          |                                    |                           |              |
| CSA C.22.2 No.14                                                                                                                     |                   |                               |                          |                                    |                           |              |
| GB/T14048.3                                                                                                                          |                   |                               |                          |                                    |                           |              |
| Recommended screw driver                                                                                                             |                   |                               |                          |                                    |                           |              |
| Type of screw driver                                                                                                                 |                   |                               |                          | Value                              |                           |              |
| Cross Screwdriver                                                                                                                    |                   |                               |                          | PH1                                |                           |              |
| Slot screwdriver according to DIN 5264                                                                                               |                   |                               |                          | 0,8x4                              |                           |              |
| General Information                                                                                                                  |                   |                               |                          |                                    |                           |              |
| Text                                                                                                                                 |                   |                               |                          |                                    |                           |              |
| - Do not lubricate or treat contacts.                                                                                                |                   |                               |                          |                                    |                           |              |
| - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. |                   |                               |                          |                                    |                           |              |

## General Information

### Text

- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

## Waste Electrical & Electronic Equipment (WEEE)

### Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at [www.krausnaimer.com](http://www.krausnaimer.com)

## Proposition 65

### Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


## Mounting-FT2

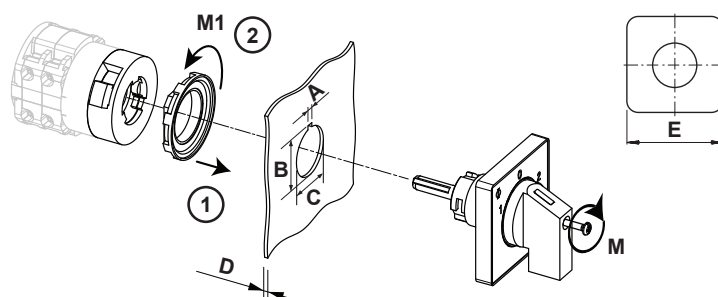

|                      |   |                   |
|----------------------|---|-------------------|
| IP - Code front side |   | IP66, IP67, IP69k |
| Stages               |   | 1,00 - 12,00      |
| A                    | H | 3,20 mm           |
| A+_tol.              | H | 0,20 mm           |
| A-_tol.              | H | 0,00 mm           |
| B                    | H | 24,10 mm          |
| B+_tol.              | H | 0,40 mm           |
| B-_tol.              | H | 0,00 mm           |
| C                    | Ø | 22,30 mm          |
| C+_tol.              | Ø | 0,40 mm           |
| C-_tol.              | Ø | 0,00 mm           |
| D                    | H | <= 6,00 mm        |
| E                    | □ | 48,00 mm          |
| M                    | ↺ | 0,50 Nm           |
| M1                   | ↺ | 1,80 Nm           |



## Wiring diagram

CA10.A007.FT2

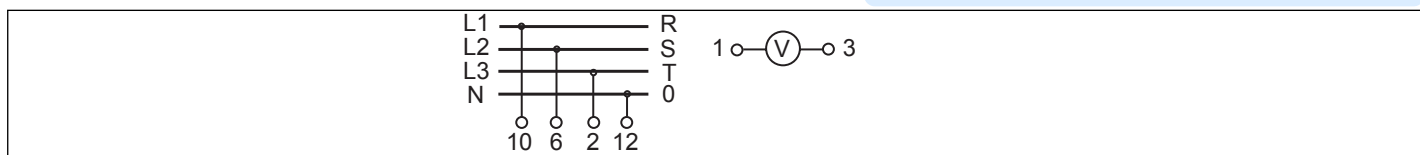

## Switch program


CA10.A007.FT2

|  Kraus & Naimer          |     | CA10 |   | A007 |   | Page 1 of 1 |    |    |    |    |    |    |    |
|-----------------------------------------------------------------------------------------------------------|-----|------|---|------|---|-------------|----|----|----|----|----|----|----|
| Face Plate                                                                                                |     |      |   |      |   |             |    |    |    |    |    |    |    |
|                          |     | 1    | 3 | 5    | 7 | 9           | 11 | 13 | 15 | 17 | 19 | 21 | 23 |
|                          |     |      |   |      |   |             |    |    |    |    |    |    |    |
| Switching Angle <input type="text" value="45"/><br>Total switching Angle <input type="text" value="270"/> |     | 2    | 4 | 6    | 8 | 10          | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
| TR<br>ST<br>RS<br>0<br>R0<br>S0<br>T0                                                                     | 225 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 240 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 255 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 270 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 285 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 300 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 315 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 330 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 345 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 0   |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 15  |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 30  |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 45  |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 60  |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 75  |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 90  |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 105 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 120 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 135 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 150 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 165 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 180 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 195 |      |   |      |   |             |    |    |    |    |    |    |    |
|                                                                                                           | 210 |      |   |      |   |             |    |    |    |    |    |    |    |

Version: 44

## Face plate

S0.F785/A10.E1L

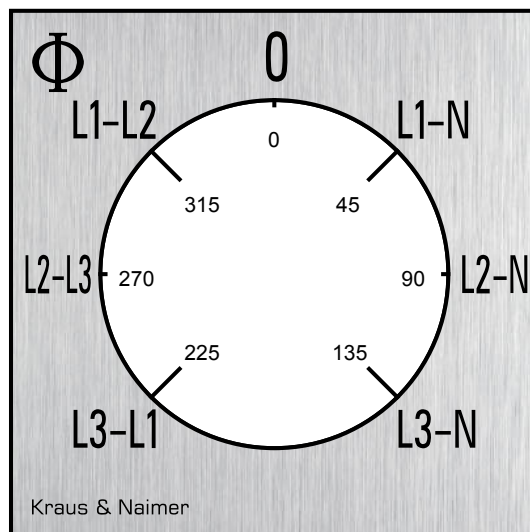

## HANDLES

**Designation:** S0C.G251

**Handle colour:** "1" black

