



Sample image

## Datasheet

**Article number:** 70004833

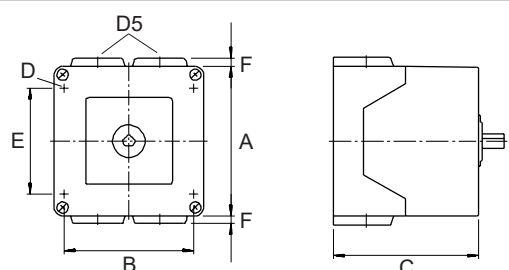
**Description:** Other Component

|                                              |                                   |                                   |                                                                                              |                 |
|----------------------------------------------|-----------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------|-----------------|
| IEC 60947-3 EN 60947-3, VDE 0660 Teil 107    |                                   |                                   |                                                                                              |                 |
| Номинальное напряжение изоляции Ui           |                                   |                                   |                                                                                              |                 |
| Напряжение (В) Переменный ток/Постоянный ток |                                   |                                   |                                                                                              |                 |
| 690 AC / DC                                  |                                   |                                   |                                                                                              |                 |
| Номинальный длительный ток Iu/Ith            |                                   |                                   |                                                                                              |                 |
| Сила тока (А)                                | Температура окружающей среды (°C) | Пиковое значение температуры (°C) | Дополнительные требования                                                                    |                 |
| 20                                           | 55                                | 60                                | Средняя температура окружающей среды +55°C в течение 24 часов с максимальным значением +60°C |                 |
| Номинальный рабочий ток Ie                   |                                   |                                   |                                                                                              |                 |
| Категория применения                         |                                   | Напряжение (диапазон) (В)         |                                                                                              | Сила тока (А)   |
| AC-15                                        |                                   | 220 - 240                         |                                                                                              | 6               |
| AC-15                                        |                                   | 380 - 440                         |                                                                                              | 4               |
| Номинальная рабочая мощность                 |                                   |                                   |                                                                                              |                 |
| Категория применения                         | Напряжение (диапазон) (В)         | Количество фаз                    | Количество полюсов                                                                           | Мощность (кВт)  |
| AC-3                                         | 220 - 240                         | 3                                 | 3                                                                                            | 3               |
| AC-3                                         | 380 - 440                         | 3                                 | 3                                                                                            | 5,50            |
| AC-3                                         | 660 - 690                         | 3                                 | 3                                                                                            | 5,50            |
| AC-3                                         | 220 - 240                         | 1                                 | 2                                                                                            | 2,20            |
| AC-3                                         | 380 - 440                         | 1                                 | 2                                                                                            | 3               |
| AC-23A                                       | 220 - 240                         | 3                                 | 3                                                                                            | 3,70            |
| AC-23A                                       | 380 - 440                         | 3                                 | 3                                                                                            | 7,50            |
| AC-23A                                       | 660 - 690                         | 3                                 | 3                                                                                            | 7,50            |
| AC-23A                                       | 220 - 240                         | 1                                 | 2                                                                                            | 2,50            |
| AC-23A                                       | 380 - 440                         | 1                                 | 2                                                                                            | 3,70            |
| Максимальный номинал предохранителя по IEC   |                                   |                                   |                                                                                              |                 |
| Характеристика предохранителя                |                                   | Количество предохранителей        |                                                                                              | Сила тока (А)   |
| gG                                           |                                   | 1                                 |                                                                                              | 25              |
| UL60947-4-1, UL508                           |                                   |                                   |                                                                                              |                 |
| Nominal Voltage                              |                                   |                                   |                                                                                              |                 |
| Voltage (V) AC / DC                          |                                   |                                   |                                                                                              |                 |
| 600 AC                                       |                                   |                                   |                                                                                              |                 |
| Номинальное напряжение изоляции Ui           |                                   |                                   |                                                                                              |                 |
| Напряжение (В) Переменный ток/Постоянный ток |                                   |                                   |                                                                                              |                 |
| 600 AC                                       |                                   |                                   |                                                                                              |                 |
| Rated thermal current                        |                                   |                                   |                                                                                              |                 |
| Current (A)                                  |                                   | Ambient temperature (°C)          |                                                                                              | Additional Text |
| 20                                           |                                   | 0 - 40                            |                                                                                              | --              |
| Horsepower rating                            |                                   |                                   |                                                                                              |                 |
| Across-the-Line Motor Starting               | Voltage (V)                       | No. of phases                     | No. of poles                                                                                 | Power (HP)      |
| Reversing                                    | 110 - 120                         | 1                                 | 2                                                                                            | 0,17            |
| Reversing                                    | 220 - 240                         | 1                                 | 2                                                                                            | 0,50            |
| Reversing                                    | 277 - 277                         | 1                                 | 2                                                                                            | 0,60            |
| Reversing                                    | 415 - 415                         | 1                                 | 2                                                                                            | 1               |
| Reversing                                    | 440 - 480                         | 1                                 | 2                                                                                            | 1,50            |
| Reversing                                    | 550 - 600                         | 1                                 | 2                                                                                            | 1,50            |
| Reversing                                    | 110 - 120                         | 3                                 | 3                                                                                            | 0,50            |
| Reversing                                    | 220 - 240                         | 3                                 | 3                                                                                            | 1               |
| Reversing                                    | 415 - 415                         | 3                                 | 3                                                                                            | 2               |
| Reversing                                    | 440 - 480                         | 3                                 | 3                                                                                            | 3               |
| Reversing                                    | 550 - 600                         | 3                                 | 3                                                                                            | 3               |
| DOL                                          | 110 - 120                         | 1                                 | 2                                                                                            | 0,50            |
| DOL                                          | 220 - 240                         | 1                                 | 2                                                                                            | 1               |
| DOL                                          | 277 - 277                         | 1                                 | 2                                                                                            | 2               |
| DOL                                          | 440 - 480                         | 1                                 | 2                                                                                            | 2               |
| DOL                                          | 550 - 600                         | 1                                 | 2                                                                                            | 2               |
| DOL                                          | 110 - 120                         | 3                                 | 3                                                                                            | 1,50            |
| DOL                                          | 220 - 240                         | 3                                 | 3                                                                                            | 3               |
| DOL                                          | 415 - 415                         | 3                                 | 3                                                                                            | 5               |
| DOL                                          | 440 - 480                         | 3                                 | 3                                                                                            | 5               |

|                                                                                                                                                                                                                                                                                                                                                                                                        |                   |                                          |                        |                                    |                            |                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------|------------------------|------------------------------------|----------------------------|--------------------------|
| Horsepower rating                                                                                                                                                                                                                                                                                                                                                                                      |                   |                                          |                        |                                    |                            |                          |
| Across-the-Line Motor Starting                                                                                                                                                                                                                                                                                                                                                                         |                   | Voltage (V)                              | No. of phases          | No. of poles                       | Power (HP)                 | Ambient temperature [°C] |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 550 - 600                                | 3                      | 3                                  | 5                          | 40                       |
| Pilot duty rating code                                                                                                                                                                                                                                                                                                                                                                                 |                   |                                          |                        |                                    |                            |                          |
| Duty Code                                                                                                                                                                                                                                                                                                                                                                                              |                   |                                          |                        |                                    |                            |                          |
| A600                                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                          |                        |                                    |                            |                          |
| SCCR / Max. fuse rating                                                                                                                                                                                                                                                                                                                                                                                |                   |                                          |                        |                                    |                            |                          |
| Conditions of acceptability                                                                                                                                                                                                                                                                                                                                                                            |                   |                                          |                        |                                    |                            |                          |
| These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses. |                   |                                          |                        |                                    |                            |                          |
| Temp. rating of wire                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                          |                        |                                    |                            |                          |
| Temperature rating (°C)                                                                                                                                                                                                                                                                                                                                                                                |                   |                                          | Current (A) Text       |                                    |                            |                          |
| 60 - 75                                                                                                                                                                                                                                                                                                                                                                                                |                   |                                          | – Use copper wire only |                                    |                            |                          |
| Connecting instructions                                                                                                                                                                                                                                                                                                                                                                                |                   |                                          |                        |                                    |                            |                          |
| Markings                                                                                                                                                                                                                                                                                                                                                                                               |                   |                                          |                        |                                    |                            |                          |
| When intended for use as a motor disconnect the device shall be provided with a method of being locked in the OFF-position.                                                                                                                                                                                                                                                                            |                   |                                          |                        |                                    |                            |                          |
| General Use                                                                                                                                                                                                                                                                                                                                                                                            |                   |                                          |                        |                                    |                            |                          |
| AC / DC                                                                                                                                                                                                                                                                                                                                                                                                | Voltage (V)       | Current (A)                              | No. of phases          | No. of poles                       | No. of contacts in series  |                          |
| AC                                                                                                                                                                                                                                                                                                                                                                                                     | 600               | 20                                       | 1                      | 2                                  | 1                          |                          |
| AC                                                                                                                                                                                                                                                                                                                                                                                                     | 600               | 20                                       | 3                      | 3                                  | 1                          |                          |
| CSA                                                                                                                                                                                                                                                                                                                                                                                                    |                   |                                          |                        |                                    |                            |                          |
| Nominal Voltage                                                                                                                                                                                                                                                                                                                                                                                        |                   |                                          |                        |                                    |                            |                          |
| Voltage (V) AC / DC                                                                                                                                                                                                                                                                                                                                                                                    |                   |                                          |                        |                                    |                            |                          |
| 600 AC                                                                                                                                                                                                                                                                                                                                                                                                 |                   |                                          |                        |                                    |                            |                          |
| Номинальное напряжение изоляции Ui                                                                                                                                                                                                                                                                                                                                                                     |                   |                                          |                        |                                    |                            |                          |
| Напряжение (В) Переменный ток/Постоянный ток                                                                                                                                                                                                                                                                                                                                                           |                   |                                          |                        |                                    |                            |                          |
| 600 AC                                                                                                                                                                                                                                                                                                                                                                                                 |                   |                                          |                        |                                    |                            |                          |
| Rated thermal current                                                                                                                                                                                                                                                                                                                                                                                  |                   |                                          |                        |                                    |                            |                          |
| Current (A)                                                                                                                                                                                                                                                                                                                                                                                            |                   | Ambient temperature (°C) Additional Text |                        |                                    |                            |                          |
| 20                                                                                                                                                                                                                                                                                                                                                                                                     |                   | 0 - 40 –                                 |                        |                                    |                            |                          |
| Horsepower rating                                                                                                                                                                                                                                                                                                                                                                                      |                   |                                          |                        |                                    |                            |                          |
| Across-the-Line Motor Starting                                                                                                                                                                                                                                                                                                                                                                         |                   | Voltage (V)                              | No. of phases          | No. of poles                       | Power (HP)                 | Ambient temperature [°C] |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 110 - 120                                | 1                      | 2                                  | 0,50                       | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 220 - 240                                | 1                      | 2                                  | 1                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 277 - 277                                | 1                      | 2                                  | 2                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 415 - 415                                | 1                      | 2                                  | 2                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 440 - 480                                | 1                      | 2                                  | 2                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 550 - 600                                | 1                      | 2                                  | 2                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 110 - 120                                | 3                      | 3                                  | 1,50                       | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 220 - 240                                | 3                      | 3                                  | 3                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 415 - 415                                | 3                      | 3                                  | 5                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 440 - 480                                | 3                      | 3                                  | 5                          | 40                       |
| DOL                                                                                                                                                                                                                                                                                                                                                                                                    |                   | 550 - 600                                | 3                      | 3                                  | 5                          | 40                       |
| Pilot duty rating code                                                                                                                                                                                                                                                                                                                                                                                 |                   |                                          |                        |                                    |                            |                          |
| Duty Code                                                                                                                                                                                                                                                                                                                                                                                              |                   |                                          |                        |                                    |                            |                          |
| A600                                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                          |                        |                                    |                            |                          |
| Temp. rating of wire                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                          |                        |                                    |                            |                          |
| Temperature rating (°C)                                                                                                                                                                                                                                                                                                                                                                                |                   |                                          | Current (A) Text       |                                    |                            |                          |
| 75                                                                                                                                                                                                                                                                                                                                                                                                     |                   |                                          | – only                 |                                    |                            |                          |
| General Use                                                                                                                                                                                                                                                                                                                                                                                            |                   |                                          |                        |                                    |                            |                          |
| AC / DC                                                                                                                                                                                                                                                                                                                                                                                                | Voltage (V)       | Current (A)                              | No. of phases          | No. of poles                       | No. of contacts in series  |                          |
| AC                                                                                                                                                                                                                                                                                                                                                                                                     | 600               | 20                                       | 1                      | 1                                  | 1                          |                          |
| ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ                                                                                                                                                                                                                                                                                                                                                                        |                   |                                          |                        |                                    |                            |                          |
| Момент затяжки винтов                                                                                                                                                                                                                                                                                                                                                                                  |                   |                                          |                        |                                    |                            |                          |
| Момент затяжки (Нм)                                                                                                                                                                                                                                                                                                                                                                                    |                   |                                          |                        |                                    | Момент затяжки (фунт-дюйм) |                          |
| 0,60                                                                                                                                                                                                                                                                                                                                                                                                   |                   |                                          |                        |                                    | 5                          |                          |
| Stripping length                                                                                                                                                                                                                                                                                                                                                                                       |                   |                                          |                        |                                    |                            |                          |
| Length (mm) –                                                                                                                                                                                                                                                                                                                                                                                          |                   |                                          |                        |                                    |                            |                          |
| 8 STRIPPINGLENGTH                                                                                                                                                                                                                                                                                                                                                                                      |                   |                                          |                        |                                    |                            |                          |
| Size of conductor                                                                                                                                                                                                                                                                                                                                                                                      |                   |                                          |                        |                                    |                            |                          |
| composition of conductor                                                                                                                                                                                                                                                                                                                                                                               | Min. / Max. value | No. of conductor per terminal            |                        | Cross section (mm²) or (AWG/kcmil) |                            | Material of the wire     |
| solid wire                                                                                                                                                                                                                                                                                                                                                                                             | Min.              | 1                                        |                        | 0,5mm²                             |                            | Copper                   |
| solid wire                                                                                                                                                                                                                                                                                                                                                                                             | Min.              | 2                                        |                        | 0,5mm²                             |                            | Copper                   |
| flexible wire                                                                                                                                                                                                                                                                                                                                                                                          | Min.              | 1                                        |                        | 0,75mm²                            |                            | Copper                   |
| flexible wire                                                                                                                                                                                                                                                                                                                                                                                          | Min.              | 2                                        |                        | 0,75mm²                            |                            | Copper                   |
| flexible wire                                                                                                                                                                                                                                                                                                                                                                                          | Max.              | 2                                        |                        | 2,5mm²                             |                            | Copper                   |
| flexible wire                                                                                                                                                                                                                                                                                                                                                                                          | Max.              | 2                                        |                        | AWG 14                             |                            | Copper                   |
| Single-core or stranded wire                                                                                                                                                                                                                                                                                                                                                                           | Max.              | 2                                        |                        | AWG 12                             |                            | Copper                   |
| Single-core or stranded wire                                                                                                                                                                                                                                                                                                                                                                           | Max.              | 2                                        |                        | 2,5mm²                             |                            | Copper                   |
| flexible wire with ferrule according to DIN 46228                                                                                                                                                                                                                                                                                                                                                      | Min.              | 1                                        |                        | 0,5mm²                             |                            | Copper                   |
| flexible wire with ferrule according to DIN 46228                                                                                                                                                                                                                                                                                                                                                      | Max.              | 2                                        |                        | 2,5mm²                             |                            | Copper                   |
| flexible wire with ferrule according to DIN 46228                                                                                                                                                                                                                                                                                                                                                      | Min.              | 2                                        |                        | 0,5mm²                             |                            | Copper                   |
| Approbations                                                                                                                                                                                                                                                                                                                                                                                           |                   |                                          |                        |                                    |                            |                          |
| Specification                                                                                                                                                                                                                                                                                                                                                                                          |                   |                                          |                        |                                    |                            | Marking                  |
| EAC                                                                                                                                                                                                                                                                                                                                                                                                    |                   |                                          |                        |                                    |                            | EAC                      |

| Approbations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Marking                                                                                                                                                                                                                                                                                                                                                                            |
| CE marking                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                 |
| UK Directives                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                 |
| CSA C.22.2 No.14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                 |
| Рекомендуемая отвертка                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                    |
| Тип отвертки                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Value                                                                                                                                                                                                                                                                                                                                                                              |
| Крестовая отвертка                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | PH1                                                                                                                                                                                                                                                                                                                                                                                |
| Slot screwdriver according to DIN 5264                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 0,8x4                                                                                                                                                                                                                                                                                                                                                                              |
| Общая информация                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                    |
| Текст                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                    |
| <ul style="list-style-type: none"> <li>- Не смазывайте и не разбирайте контакты.</li> <li>- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.</li> <li>- Используйте только медные провода. Не покрывать конец провода оловом.</li> <li>- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.</li> <li>- После установки переключателей расстояния между клеммами должны быть достаточными для выполнения требований применимых стандартов.</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                    |
| Waste Electrical & Electronic Equipment (WEEE)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                    |
| Picture name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Description                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at <a href="http://www.krausnaimer.com">www.krausnaimer.com</a> |
| Proposition 65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                    |
| Picture name                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Description                                                                                                                                                                                                                                                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .                                                                                                                                            |

|                                              |
|----------------------------------------------|
| Classification Contact: Rigid contact bridge |
| Classification Contact Mat: Silver           |
| Classification Terminal: Screw terminal      |

| Mounting-PF1                                                                        |   |             |  |
|-------------------------------------------------------------------------------------|---|-------------|--|
|  |   |             |  |
| IP - Код лицевая сторона                                                            |   | IP65        |  |
| Stages                                                                              |   | 3,00 - 4,00 |  |
| A                                                                                   | □ | 82,00 mm    |  |
| B                                                                                   | H | 68,00 mm    |  |
| C                                                                                   | H | 90,10 mm    |  |
| D                                                                                   | Ø | 4,40 mm     |  |
| D5                                                                                  | Ø | 4,00 x M20  |  |
| E                                                                                   | H | 52,00 mm    |  |
| F                                                                                   | H | 5,00 mm     |  |

## Wiring diagram

CA11.A401.PF1




## Switch program

CA11.A401.PF1



Kraus & Naimer

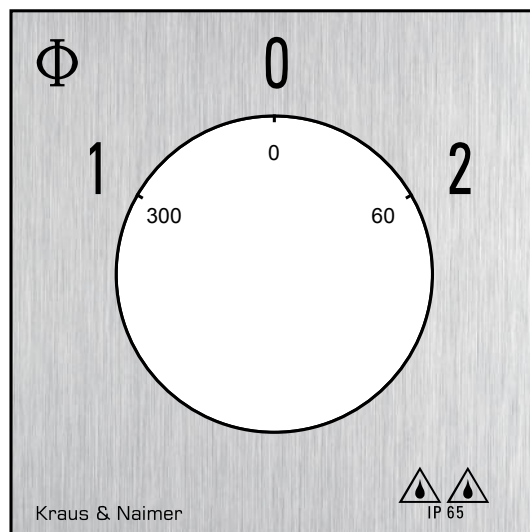
CA11
A401
Page 1 of 1

| Face Plate                                                                                                                                                              |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------------------|---|---|---|----|----|----|----|----|----|----|----|
|                                                                                        |     |  |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         |     | 1                                                                                 | 3 | 5 | 7 | 9  | 11 | 13 | 15 | 17 | 19 | 21 | 23 |
| Switching Angle <span style="border: 1px solid black; padding: 2px;">60</span><br>Total switching Angle <span style="border: 1px solid black; padding: 2px;">120</span> |     | 2                                                                                 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
| 1                                                                                                                                                                       | 300 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 315 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 330 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 0                                                                                                                                                                       | 345 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 0   |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 15  |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 2                                                                                                                                                                       | 30  |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 45  |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 60  |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 75  |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 90  |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 105 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 120 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 135 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 150 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 165 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 180 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
|                                                                                                                                                                         | 195 |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 210                                                                                                                                                                     |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 225                                                                                                                                                                     |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 240                                                                                                                                                                     |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 255                                                                                                                                                                     |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 270                                                                                                                                                                     |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |
| 285                                                                                                                                                                     |     |                                                                                   |   |   |   |    |    |    |    |    |    |    |    |

Version: 60

## Face plate

S1.F071/A10.PFL



## HANDLES

**Designation:** S1B.G257

**Handle colour:** "7" electro grey

