



Sample image

Datasheet

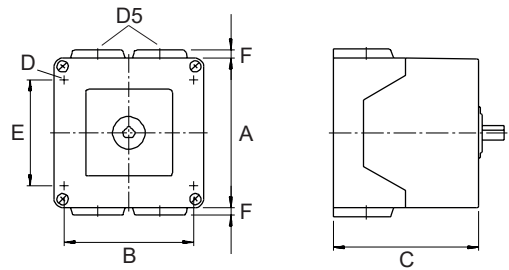
Article number: 70005788

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Номинальное напряжение изоляции Ui				
Напряжение (В) Переменный ток/Постоянный ток				
690 AC / DC				
Номинальный длительный ток Iu/Ith				
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования	
25	55	60	Средняя температура окружающей среды +55°C в течение 24 часов с максимальным значением +60°C	
Номинальный рабочий ток Ie				
Категория применения		Напряжение (диапазон) (В)		Сила тока (А)
AC-15		220 - 240		8
AC-15		380 - 440		5
Номинальная рабочая мощность				
Категория применения	Напряжение (диапазон) (В)	Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240	3	3	4
AC-3	380 - 440	3	3	7,50
AC-3	660 - 690	3	3	7,50
AC-3	220 - 240	1	2	3
AC-3	380 - 440	1	2	3,70
AC-23A	220 - 240	3	3	5,50
AC-23A	380 - 440	3	3	11
AC-23A	660 - 690	3	3	11
AC-23A	220 - 240	1	2	3
AC-23A	380 - 440	1	2	5,50
Максимальный номинал предохранителя по IEC				
Характеристика предохранителя		Количество предохранителей		Сила тока (А)
gG		1		35
UL60947-4-1, UL508				
Nominal Voltage				
Voltage (V) AC / DC				
600 AC				
Номинальное напряжение изоляции Ui				
Напряжение (В) Переменный ток/Постоянный ток				
600 AC				
Rated thermal current				
Current (A)		Ambient temperature (°C)		Additional Text
30		0 - 40		--
Horsepower rating				
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles
Reversing		110 - 120	1	2
Reversing		220 - 240	1	2
Reversing		277 - 277	1	2
Reversing		415 - 415	1	2
Reversing		440 - 480	1	2
Reversing		550 - 600	1	2
Reversing		110 - 120	3	3
Reversing		220 - 240	3	3
Reversing		415 - 415	3	3
Reversing		440 - 480	3	3
Reversing		550 - 600	3	3
DOL		110 - 120	1	2
DOL		220 - 240	1	2
DOL		277 - 277	1	2
DOL		415 - 415	1	2
DOL		440 - 480	1	2
DOL		550 - 600	1	2
DOL		110 - 120	3	3
DOL		220 - 240	3	3
DOL		415 - 415	3	3

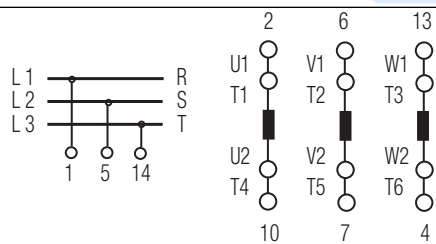
Horsepower rating						
Across-the-Line Motor Starting						
DOL	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
	440 - 480	3	3	10	40	
DOL	550 - 600	3	3	10	40	
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			-- Use copper wire only			
Connecting instructions						
Markings						
When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
CSA						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Номинальное напряжение изоляции Ui						
Напряжение (В) Переменный ток/Постоянный ток						
600 AC						
Rated thermal current						
Current (A)			Ambient temperature (°C)		Additional Text	
30			0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting						
DOL	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
	110 - 120	1	2	1,50	40	
DOL	220 - 240	1	2	3	40	
DOL	277 - 277	1	2	3	40	
DOL	415 - 415	1	2	5	40	
DOL	440 - 480	1	2	5	40	
DOL	550 - 600	1	2	5	40	
DOL	110 - 120	3	3	3	40	
DOL	220 - 240	3	3	7,50	40	
DOL	415 - 415	3	3	10	40	
DOL	440 - 480	3	3	10	40	
DOL	550 - 600	3	3	10	40	
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			-- only			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	1	1	
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ						
Момент затяжки винтов						
Момент затяжки (Нм)			Момент затяжки (фунт-дюйм)			
1			9			
Stripping length						
Length (mm) --						
9 STRIPPINGLENGTH						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire	Min.	1	0,75mm²		Copper	
solid wire	Min.	2	0,75mm²		Copper	
flexible wire	Min.	1	1,5mm²		Copper	
flexible wire	Max.	2	AWG 12		Copper	
flexible wire	Max.	2	4mm²		Copper	
flexible wire	Min.	2	1,5mm²		Copper	
Single-core or stranded wire	Max.	2	AWG 10		Copper	
Single-core or stranded wire	Max.	2	4mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	1	1mm²		Copper	
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	2	1mm²		Copper	
Approbations						
Specification					Marking	
EAC					EAC	

Approbations		Marking
Specification		
CE marking		
UK Directives		
CSA C.22.2 No.14		
GB/T14048.3		
Рекомендуемая отвертка		
Тип отвертки	Value	
Крестовая отвёртка	PH1	
Slot screwdriver according to DIN 5264	0,8x5,5	
Общая информация		
Текст		
- Не смазывайте и не разбирайте контакты. - Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами. - Используйте только медные провода. Не покрывать конец провода оловом. - Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта. - После установки переключателей расстояния между клеммами должны быть достаточными для выполнения требований применимых стандартов.		
Waste Electrical & Electronic Equipment (WEEE)		
Picture name	Description	
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com	
Proposition 65		
Picture name	Description	
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .	
Classification Contact: Rigid contact bridge		
Classification Contact Mat: Silver		
Classification Terminal: Screw terminal		

Mounting-PF1		
		
IP - Код лицевая сторона		IP65
Stages		3,00 - 4,00
A	□	82,00 mm
B	H	68,00 mm
C	H	90,10 mm
D	Ø	4,40 mm
D5	Ø	4,00 x M20
E	H	52,00 mm
F	H	5,00 mm


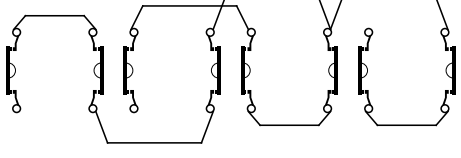
Wiring diagram

CA20.A410.PF1



Switch program

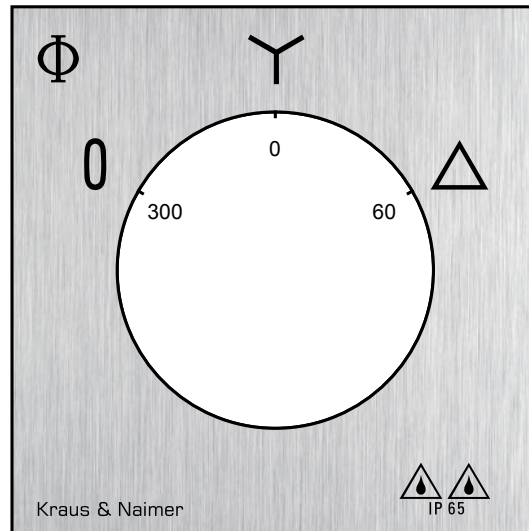
CA20.A410.PF1

 Kraus & Naimer		CA20		A410		Page 1 of 1							
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle 60 Total switching Angle 120		2	4	6	8	10	12	14	16	18	20	22	24
0													
300													
315													
330													
345													
Y													
0													
15													
30													
45													
Δ													
60													
75													
90													
105													
120													
135													
150													
165													
180													
195													
210													
225													
240													
255													
270													
285													

Version: 55

Face plate

S1.F080/A10.PFL



HANDLES

Designation: S1B.G257

Handle colour: "7" electro grey

