

Sample image

Datasheet

Article number: 70009967

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107							
Номинальное напряжение изоляции Ui							
Напряжение (В) Переменный ток/Постоянный ток							
690 AC							
Номинальный длительный ток Iu/Ith							
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования				
25	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C				
Номинальный рабочий ток Ie							
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)		
AC-32A			20 - 400		20		
Номинальная рабочая мощность							
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)		
AC-3	220 - 240		3	3	4		
AC-3	380 - 440		3	3	5,50		
AC-3	660 - 690		3	3	5,50		
AC-23A	220 - 240		3	3	5,50		
AC-23A	380 - 440		3	3	7,50		
AC-23A	660 - 690		3	3	7,50		
Максимальный номинал предохранителя по IEC							
Характеристика предохранителя			Количество предохранителей		Сила тока (А)		
gG			1		35		
UL60947-4-1 , UL508							
Nominal Voltage							
Voltage (V) AC / DC							
600 AC							
Номинальное напряжение изоляции Ui							
Напряжение (В) Переменный ток/Постоянный ток							
600 AC							
Rated thermal current							
Current (A)		Ambient temperature (°C)		Additional Text			
25		0 - 40		--			
Horsepower rating							
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL			110 - 120	1	2	1	40
DOL			220 - 240	1	2	3	40
DOL			277 - 277	1	2	3	40
DOL			415 - 415	1	2	5	40
DOL			440 - 480	1	2	5	40
DOL			550 - 600	1	2	5	40
DOL			110 - 120	3	3	2	40
DOL			200 - 240	3	3	7,50	40
DOL			415 - 415	3	3	10	40
DOL			440 - 480	3	3	15	40
DOL			550 - 600	3	3	20	40
Pilot duty rating code							
Duty Code							
A600							
SCCR / Max. fuse rating							
Conditions of acceptability							
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.							
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.							
Temp. rating of wire							
Temperature rating (°C)			Current (A)			Text	
60 - 75			--			--	
General Use							
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles			No. of contacts in series
AC	277	25	1	1			1
AC	600	25	1	2			1

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	25	3	3	1
Общая информация					
Текст					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers. - When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.					
CSA					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
600 AC					
Rated thermal current					
Current (A) Ambient temperature (°C) Additional Text					
25 0 - 40 -					
Horsepower rating					
Across-the-Line Motor Starting					
Voltage (V) No. of phases No. of poles Power (HP) Ambient temperature [°C]					
DOL 110 - 120 1 2 1 40					
DOL 220 - 240 1 2 3 40					
DOL 277 - 277 1 2 3 40					
DOL 415 - 415 1 2 5 40					
DOL 440 - 480 1 2 5 40					
DOL 550 - 600 1 2 5 40					
DOL 110 - 120 3 3 2 40					
DOL 220 - 240 3 3 7,50 40					
DOL 415 - 415 3 3 10 40					
DOL 440 - 480 3 3 15 40					
DOL 550 - 600 3 3 20 40					
Pilot duty rating code					
Duty Code					
A600					
Temp. rating of wire					
Temperature rating (°C) Current (A) Text					
75 -- --					
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	25	1	1	1
AC	600	25	1	2	1
AC	600	25	3	3	1
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ					
Size of conductor					
composition of conductor Min. / Max. value No. of conductor per terminal Cross section (mm²) or (AWG/kcmil) Material of the wire					
flexible wire Max. 1 AWG 10 Copper					
flexible wire Max. 1 4mm² Copper					
Single-core or stranded wire Max. 1 6mm² Copper					
Single-core or stranded wire Max. 1 AWG 10 Copper					
flexible wire with sleeve Max. 1 4mm² Copper					
Stripping length					
Length (mm) --					
					
Рекомендуемая отвертка					
Тип отвертки Value					
Крестовая отвертка PH2					
Slot screwdriver according to DIN 5264 0,8x4					
Момент затяжки винтов					
Момент затяжки (Нм) Момент затяжки (фунт-дюйм)					
1,25 11					
Approbations					
Specification Marking					
EAC					
CE marking					
UK Directives					
CSA C.22.2 No.14					
GB/T14048.3					

Общая информация

Текст

- Примечание по электромагнитной совместимости: это устройство подходит для использования в среде А и В.
- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE2

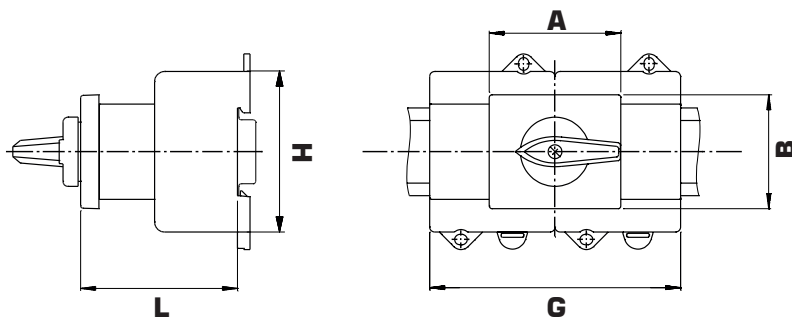


IP - Код	лицевая сторона	IP20
Stages		4,00 - 4,00
A	H	43,70 mm
B	H	45,40 mm
G	H	55,50 mm
H	H	54,00 mm
L	H	56,50 mm



Wiring diagram

KG20A.T304.VE2

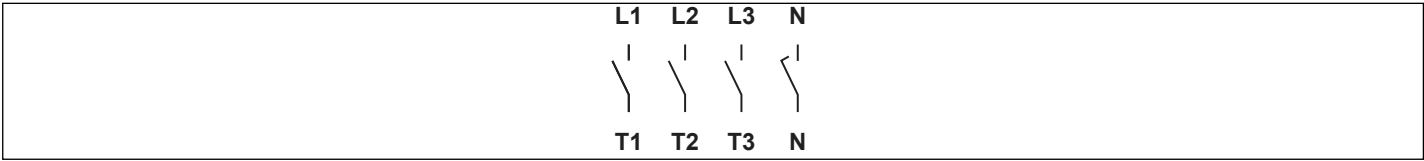

Switch program

KG20A.T304.VE2



Kraus & Naimer


KG20A
T304
Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

K0.F456/C10.VE2

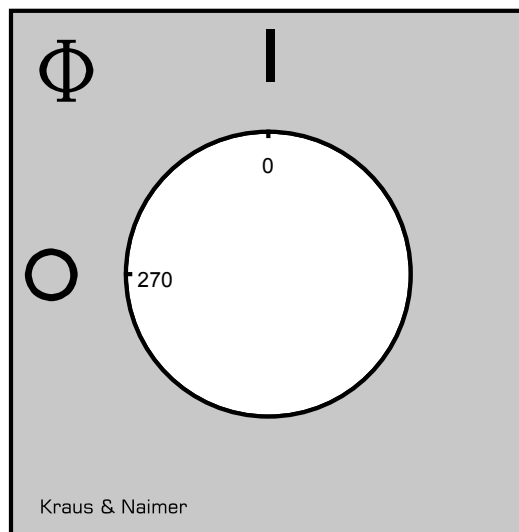

PADLOCK DEVICE

with type F-handle for type of mounting VE2 and VE21

Designation: S0.V840B/E7D

Lock bow diameter: "E" for lock bow diameter 4,5-6mm

Colour of handle: "7" electro-grey, locking bar flag red

Type of mounting: "D" for type of mounting VE2 - for KA40-KA63B, KG20A/KG32A, KG41-KG64B, KG80/KG100 and KH(R)16-KH(R)80

