



Sample image

Datasheet

Article number: 70010888

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Номинальное напряжение изоляции Ui

Напряжение (В) Переменный ток/Постоянный ток
690 AC

Номинальный длительный ток Iu/Ith

Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования
40	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C

Номинальный рабочий ток Ie

Категория применения	Напряжение (диапазон) (В)	Сила тока (А)
AC-32A	20 - 400	40

Номинальная рабочая мощность

Категория применения	Напряжение (диапазон) (В)	Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240	3	3	7,50
AC-3	380 - 440	3	3	11
AC-3	660 - 690	3	3	11
AC-23A	220 - 240	3	3	7,50
AC-23A	380 - 440	3	3	15
AC-23A	660 - 690	3	3	15

Максимальный номинал предохранителя по IEC

Характеристика предохранителя	Количество предохранителей	Сила тока (А)
gG	1	50

UL60947-4-1, UL508

Nominal Voltage

Voltage (V) AC / DC
600 AC

Номинальное напряжение изоляции Ui

Напряжение (В) Переменный ток/Постоянный ток
600 AC

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
42	0 - 40	-

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	2	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	7,50	40
DOL	440 - 480	1	2	10	40
DOL	550 - 600	1	2	10	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	15	40
DOL	440 - 480	3	3	25	40
DOL	550 - 600	3	3	30	40

Pilot duty rating code

Duty Code
A600

SCCR / Max. fuse rating

Conditions of acceptability

This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.

Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 60A Class J fuses.

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
60 - 75	-	-

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	42	1	1	1

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	42	1	2	1
AC	600	42	3	3	1

Общая информация

Текст

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA

Nominal Voltage

Voltage (V) AC / DC
600 AC

Номинальное напряжение изоляции Ui

Напряжение (В) Переменный ток/Постоянный ток
600 AC

Rated thermal current

Current (A) Ambient temperature (°C) Additional Text
40 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	2	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	7,50	40
DOL	415 - 415	1	2	7,50	40
DOL	440 - 480	1	2	10	40
DOL	550 - 600	1	2	10	40
DOL	110 - 120	3	3	5	40
DOL	220 - 240	3	3	15	40
DOL	415 - 415	3	3	15	40
DOL	440 - 480	3	3	25	40
DOL	550 - 600	3	3	30	40

Temp. rating of wire

Temperature rating (°C) Current (A) Text
75 -- --

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	40	1	1	1
AC	600	40	1	2	1
AC	600	40	3	3	1

ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	2	0,75mm ²	Copper
solid wire	Min.	1	1,5mm ²	Copper
flexible wire	Max.	1	AWG 6	Copper
flexible wire	Min.	1	2,5mm ²	Copper
flexible wire	Max.	1	10mm ²	Copper
flexible wire	Min.	2	1,5mm ²	Copper
Single-core or stranded wire	Max.	1	AWG 6	Copper
Single-core or stranded wire	Max.	1	16mm ²	Copper
flexible wire with sleeve	Max.	1	10mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,75mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	1,5mm ²	Copper

Stripping length

Length (mm) --



Рекомендуемая отвертка

Тип отвертки	Value
Крестовая отвёртка	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Момент затяжки винтов

Момент затяжки (Нм) Момент затяжки (фунт-дюйм)
1,80 16

Approbations

Specification	Marking
---------------	---------

EAC



CE marking



UK Directives




CSA C.22.2 No.14



Approbations	
Specification	Marking
GB/T14048.3	 GB/T14048.3
Общая информация	
Текст	
- Примечание по электромагнитной совместимости: это устройство подходит для использования в среде А и В. - Не смазывайте и не разбирайте контакты. - Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами. - Используйте только медные провода. Не покрывать конец провода оловом. - Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.	
Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com
Proposition 65	
Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

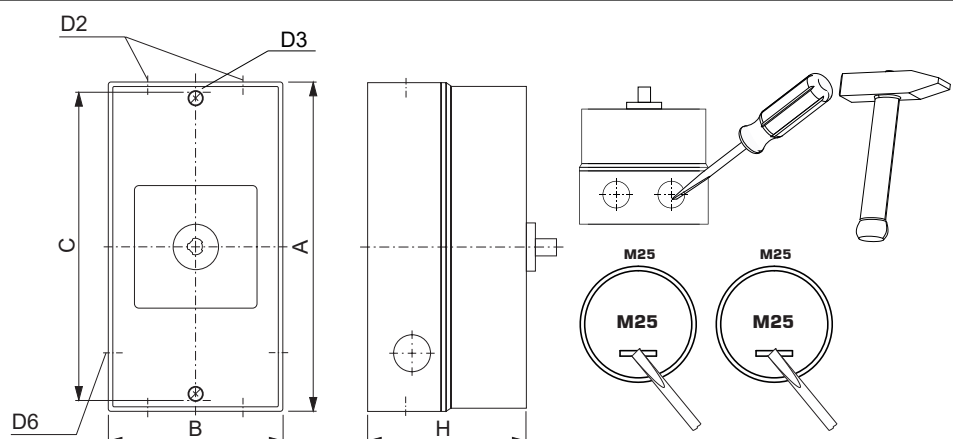Mounting-KL11V			
			
IP - Код лицевая сторона		IP66, IP67, IP69k	
Stages		1,00 - 5,00	
A	H	190,00 mm	
B	H	100,00 mm	
C	H	178,00 mm	
D2	Ø	4,00 x M25	
D3	Ø	5,60 mm	
D6	Ø	2,00 x M25	
H	H	93,00 mm	



Wiring diagram

KG41.T303.KL11V



Switch program

KG41.T303.KL11V



Kraus & Naimer


KG41
T303
Page 1 of 1

Face Plate										
		L1	L2	L3						
		1	3	5	7	9	11	13	15	
  										
Switching Angle	90	2	4	6	8	10	12	14	16	
Total switching Angle	90	T1	T2	T3						
0	270									
1	0	■	■	■						
	90									
	180									

Version: 102

Face plate

S1.F656/E10.V9

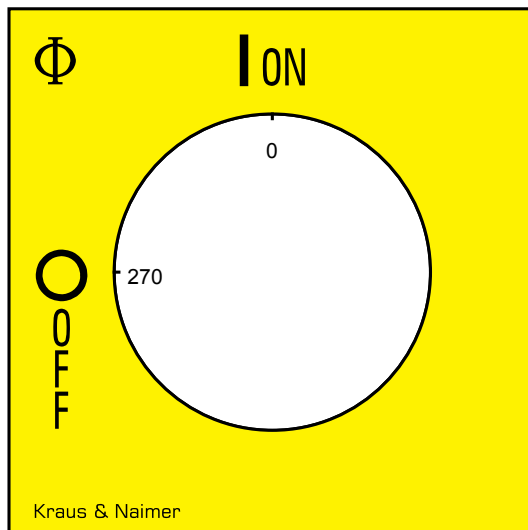

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K1.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage			
		Voltage (V)	AC / DC
		690	AC
Номинальный длительный ток Iu/Ith			
Сила тока (A)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования
16	55	60	Средняя температура окружающей среды +55°C в течение 24 часов с максимальным значением +60°C
Номинальный рабочий ток Ie			
Категория применения	Напряжение (диапазон) (В)		Сила тока (А)
AC-15	110 - 240		6
AC-15	380 - 440		3
AC-15	500		1,50
AC-21A	20 - 690		16

UL60947-4-1, UL508

Nominal Voltage			
		Voltage (V)	AC / DC
		600	AC
Номинальное напряжение изоляции Ui			
		Напряжение (В)	Переменный ток/Постоянный ток
		600	AC
Rated thermal current			
		Current (A)	Ambient temperature (°C) Additional Text
		10	0 - 40 --
Pilot duty rating code			
Duty Code			
A600			
General Use			
AC / DC	Voltage (V)	Current (A)	No. of phases No. of poles No. of contacts in series
AC	600	10	1 1 1

ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ

Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,5mm ²	Copper
solid wire	Min.	2	0,5mm ²	Copper
flexible wire	Min.	1	0,75mm ²	Copper
flexible wire	Min.	2	0,75mm ²	Copper
flexible wire	Max.	2	2,5mm ²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,5mm ²	Copper
Stripping length				
Length (mm) --				
				
Рекомендуемая отвертка				
Тип отвертки		Value		
Крестовая отвёртка		PH1		
Slot screwdriver according to DIN 5264		0,8x4		
Момент затяжки винтов				
		Момент затяжки (Нм)		Момент затяжки (фунт-дюйм)
		0.60		5

Общая информация

Текст

- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.

13 21
14 22