

Sample image

Datasheet

Article number: 70011053

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
690 AC					
Номинальный длительный ток Iu/Ith					
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования		
40	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C		
Номинальный рабочий ток Ie					
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)
AC-32A			20 - 400		40
Номинальная рабочая мощность					
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240		3	3	7,50
AC-3	380 - 440		3	3	11
AC-3	660 - 690		3	3	11
AC-23A	220 - 240		3	3	7,50
AC-23A	380 - 440		3	3	15
AC-23A	660 - 690		3	3	15
Максимальный номинал предохранителя по IEC					
Характеристика предохранителя			Количество предохранителей		Сила тока (А)
gG			1		50
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C)		Additional Text	
42		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles
DOL			110 - 120	1	2
DOL			220 - 240	1	2
DOL			277 - 277	1	2
DOL			415 - 415	1	2
DOL			440 - 480	1	2
DOL			550 - 600	1	2
DOL			110 - 120	3	3
DOL			220 - 240	3	3
DOL			415 - 415	3	3
DOL			440 - 480	3	3
DOL			550 - 600	3	3
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 60A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			-- --		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	42	1	1	1
AC	600	42	1	2	1

General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	600	42	3	3	1			
Общая информация								
Текст								
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.								
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.								
CSA								
Nominal Voltage								
				Voltage (V)	AC / DC			
				600	AC			
Номинальное напряжение изоляции Ui								
				Напряжение (В)	Переменный ток/Постоянный ток			
				600	AC			
Rated thermal current								
		Current (A)	Ambient temperature (°C)		Additional Text			
		40	0 - 40		--			
Horsepower rating								
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL				110 - 120	1	2	2	40
DOL				220 - 240	1	2	5	40
DOL				277 - 277	1	2	7,50	40
DOL				415 - 415	1	2	7,50	40
DOL				440 - 480	1	2	10	40
DOL				550 - 600	1	2	10	40
DOL				110 - 120	3	3	5	40
DOL				220 - 240	3	3	15	40
DOL				415 - 415	3	3	15	40
DOL				440 - 480	3	3	25	40
DOL				550 - 600	3	3	30	40
Temp. rating of wire								
			Temperature rating (°C)	Current (A)		Text		
			75			-- --		
General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	277	40	1	1	1			
AC	600	40	1	2	1			
AC	600	40	3	3	1			
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ								
Size of conductor								
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire		
flexible wire	Max.	1		AWG 6		Copper		
flexible wire	Max.	1		10mm²		Copper		
Single-core or stranded wire	Max.	1		AWG 6		Copper		
Single-core or stranded wire	Max.	1		16mm²		Copper		
flexible wire with sleeve	Max.	1		10mm²		Copper		
Stripping length								
				Length (mm) --				
								
				12				
Рекомендуемая отвертка								
Тип отвертки				Value				
Крестовая отвёртка				PH2				
Slot screwdriver according to DIN 5264				1,2x6,5				
Момент затяжки винтов								
				Момент затяжки (Нм)		Момент затяжки (фунт-дюйм)		
				1,80		16		
Approbations								
Specification								
Marking								
EAC								
CE marking								
UK Directives								
CSA C.22.2 No.14								
GB/T14048.3								
Общая информация								
Текст								
- Примечание по электромагнитной совместимости: это устройство подходит для использования в среде А и В.								



Общая информация

Текст

- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE

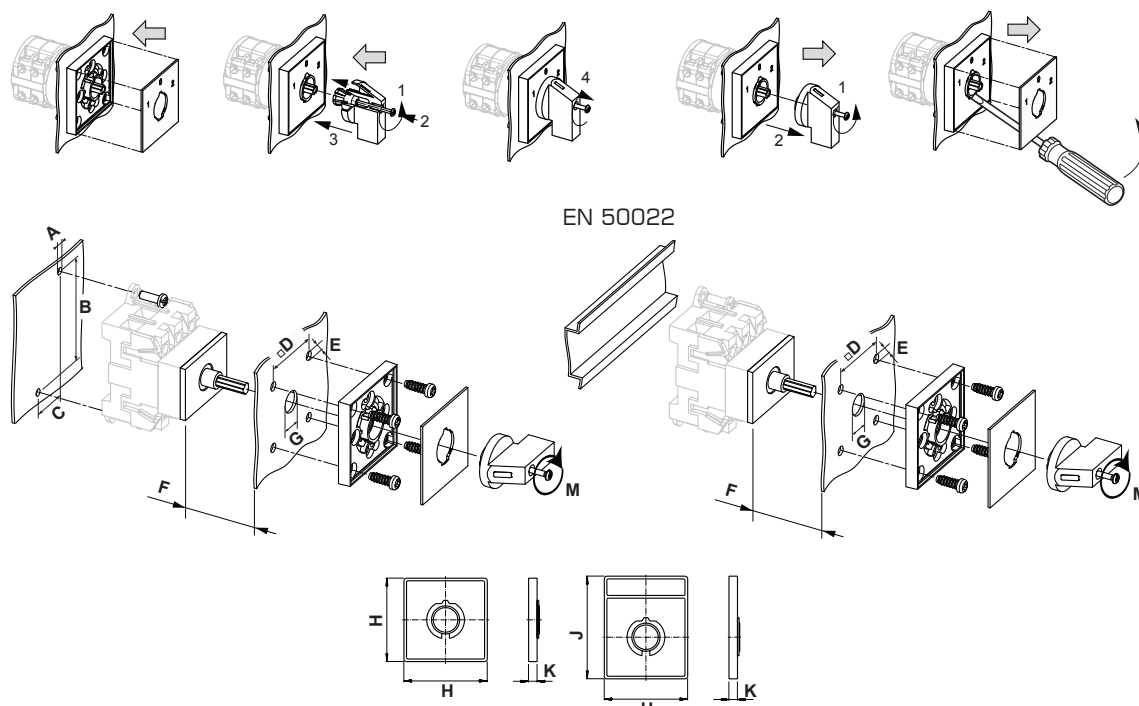

IP - Код лицевая сторона	IP40
Stages	1,00 - 5,00
A	Ø 4,10 mm
B	H 70,00 mm
C	H 25,00 mm
D	□ 48,00 mm
E	Ø 5,00 mm
F	H ≤ 13,50 mm
G	Ø 10,00 - 15,00 mm
H	H 64,00 mm
J	H 78,00 mm
K	H 7,40 mm
M	⌀ 0,70 Nm



Wiring diagram

KG41B.T304.VE



Switch program

KG41B.T304.VE



Kraus & Naimer

KG41B
T304

Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

S1.F456/C10.V11H





Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/D61/B2

Colour of F-handle ring: "D" red

Colour of face ring: "6" yellow

Locking position: "1" at 270° (1x90°)

Type of mounting: "B" for type of mounting VE

Switch type: "2" for KA-, KG- and KH(R)-switches



MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.



1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)

Designation: S1.M280E/B24S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch


Shaft length: "4" 98 - 118 mm

Application: "S" for type of mounting VE

Type of version: "-EF" splash proof (IP66/67)




A	□	48,00 mm	B	∅	5,00 mm	C	∅	19,00 - 22,00 mm
D	H	4,00 mm						

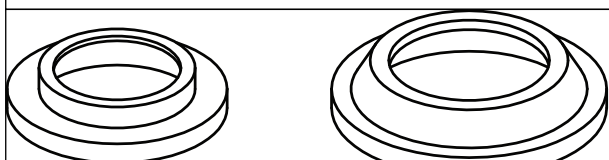

S2D V840 10

S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

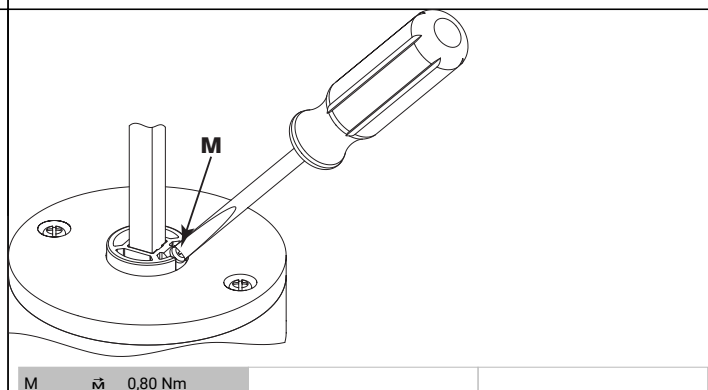

1. Loosen the screw
2. Move shaft
3. Tighten the screw