

Sample image

Datasheet

Article number: 70012797

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Номинальное напряжение изоляции Ui					
			Напряжение (В) Переменный ток/Постоянный ток		
			690 AC		
Номинальный длительный ток Iu/Ith					
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования		
63	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C		
Номинальный рабочий ток Ie					
Категория применения		Напряжение (диапазон) (В)		Сила тока (А)	
AC-32A		20 - 400		63	
Номинальная рабочая мощность					
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240		3	3	11
AC-3	380 - 440		3	3	18,50
AC-3	660 - 690		3	3	15
AC-23A	220 - 240		3	3	11
AC-23A	380 - 440		3	3	22
AC-23A	660 - 690		3	3	18,50
Максимальный номинал предохранителя по IEC					
Характеристика предохранителя			Количество предохранителей		Сила тока (А)
gG			1		63
UL60947-4-1 , UL508					
Nominal Voltage					
			Voltage (V) AC / DC		
			600 AC		
Номинальное напряжение изоляции Ui					
			Напряжение (В) Переменный ток/Постоянный ток		
			600 AC		
Rated thermal current					
		Current (A)	Ambient temperature (°C)		Additional Text
		60	0 - 40		--
Horsepower rating					
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles
DOL			110 - 120	1	2
DOL			220 - 240	1	2
DOL			277 - 277	1	2
DOL			415 - 415	1	2
DOL			440 - 480	1	2
DOL			550 - 600	1	2
DOL			110 - 120	3	3
DOL			220 - 240	3	3
DOL			415 - 415	3	3
DOL			440 - 480	3	3
DOL			550 - 600	3	3
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 70A Class J fuses.					
Temp. rating of wire					
			Temperature rating (°C)		Current (A) Text
			60 - 75		-- --
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	60	1	1	1
AC	600	60	1	2	1
AC	600	60	3	3	1
Общая информация					
Текст					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					

Общая информация						
Текст						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Номинальное напряжение изоляции Ui						
			Напряжение (В) Переменный ток/Постоянный ток			
			600 AC			
Rated thermal current						
			Current (A)	Ambient temperature (°C)		Additional Text
			60	0 - 40		--
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	3	40
DOL		220 - 240	1	2	7,50	40
DOL		277 - 277	1	2	7,50	40
DOL		415 - 415	1	2	10	40
DOL		440 - 480	1	2	15	40
DOL		110 - 120	3	3	5	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	20	40
DOL		440 - 480	3	3	30	40
DOL		550 - 600	3	3	40	40
Temp. rating of wire						
			Temperature rating (°C)	Current (A)		Text
			75			-- --
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire	Min.		2	0,75mm²	Copper	
solid wire	Min.		1	1,5mm²	Copper	
flexible wire	Max.		1	AWG 6	Copper	
flexible wire	Min.		1	2,5mm²	Copper	
flexible wire	Max.		1	10mm²	Copper	
flexible wire	Min.		2	1,5mm²	Copper	
Single-core or stranded wire	Max.		1	AWG 6	Copper	
Single-core or stranded wire	Max.		1	16mm²	Copper	
flexible wire with sleeve	Max.		1	10mm²	Copper	
flexible wire with ferrule according to DIN 46228	Min.		2	0,75mm²	Copper	
flexible wire with ferrule according to DIN 46228	Min.		1	1,5mm²	Copper	
Stripping length						
			Length (mm) --			
						
			12			
Рекомендуемая отвертка						
Тип отвертки			Value			
Крестовая отвёртка			PH2			
Slot screwdriver according to DIN 5264			1,2x6,5			
Момент затяжки винтов						
			Момент затяжки (Нм)		Момент затяжки (фунт-дюйм)	
			1,80		16	
Approbations						
Specification					Marking	
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Общая информация						
Текст						
- Примечание по электромагнитной совместимости: это устройство подходит для использования в среде А и В.						

Общая информация

Текст
- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-VE2

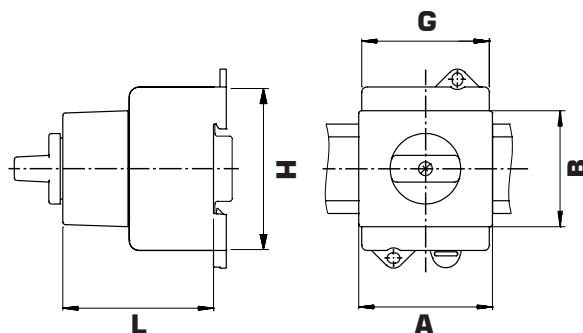

IP - Код лицевая сторона	IP20
Stages	2,00 - 3,00
A	H 52,40 mm
B	H 45,40 mm
G	H 50,00 mm
H	H 64,00 mm
L	H 56,50 mm

Wiring diagram

KG64.T303.VE2

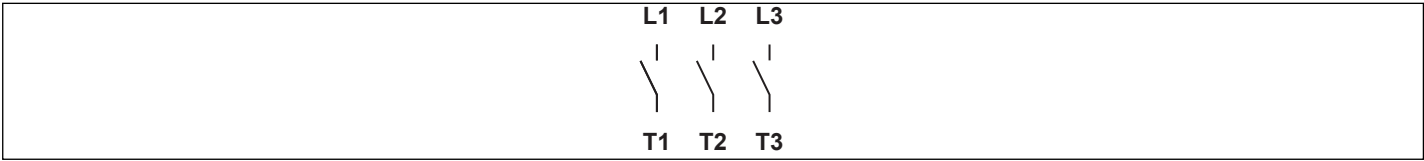

Switch program

KG64.T303.VE2



Kraus & Naimer


KG64
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0								
	90								
	180								

Version: 102

Face plate

K1.F456/C10.VE2

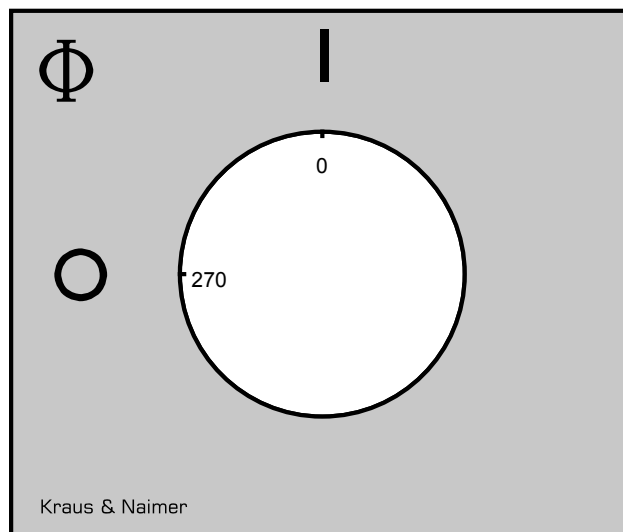

PADLOCK DEVICE

with type F-handle for type of mounting VE2 and VE21

Designation: S0.V840B/E7D

Lock bow diameter: "E" for lock bow diameter 4,5-6mm

Colour of handle: "7" electro-grey, locking bar flag red

Type of mounting: "D" for type of mounting VE2 - for KA40-KA63B, KG20A/KG32A, KG41-KG64B, KG80/KG100 and KH(R)16-KH(R)80

