

Sample image

Datasheet

Article number: 70014275

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Номинальное напряжение изоляции Ui						
Напряжение (В) Переменный ток/Постоянный ток						
690 AC / DC						
Номинальный длительный ток Iu/Ith						
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования			
20	55	60	Средняя температура окружающей среды +55°C в течение 24 часов с максимальным значением +60°C			
Номинальный рабочий ток Ie						
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)	
AC-15			220 - 240		6	
AC-15			380 - 440		4	
Номинальная рабочая мощность						
Категория применения		Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)
AC-3		220 - 240		3	3	3
AC-3		380 - 440		3	3	5,50
AC-3		660 - 690		3	3	5,50
AC-3		220 - 240		1	2	2,20
AC-3		380 - 440		1	2	3
AC-23A		220 - 240		3	3	3,70
AC-23A		380 - 440		3	3	7,50
AC-23A		660 - 690		3	3	7,50
AC-23A		220 - 240		1	2	2,50
AC-23A		380 - 440		1	2	3,70
Максимальный номинал предохранителя по IEC						
Характеристика предохранителя				Количество предохранителей		Сила тока (А)
gG				1		25
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Номинальное напряжение изоляции Ui						
Напряжение (В) Переменный ток/Постоянный ток						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
20		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP) Ambient temperature [°C]
DOL			110 - 120	1	2	0,50 40
DOL			220 - 240	1	2	1 40
DOL			277 - 277	1	2	2 40
DOL			440 - 480	1	2	2 40
DOL			550 - 600	1	2	2 40
DOL			110 - 120	3	3	1,50 40
DOL			220 - 240	3	3	3 40
DOL			440 - 480	3	3	5 40
DOL			550 - 600	3	3	5 40
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			-- Use copper wire only			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	



Kraus & Naimer

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	20	1	2	1
AC	600	20	3	3	1

CSA

Nominal Voltage	1.2 V
------------------------	-------

Nominal Voltage	Voltage (V) AC / DC
	600 AC

Номинальное напряжение изоляции U_i	
---------------------------------------	--

Напряжение (В)	Переменный ток/Постоянный ток
600 AC	

Rated thermal current	100 A
-----------------------	-------

Current (A)	Ambient temperature (°C)	Additional Text
20	0 - 40	--

Horsepower rating	
-------------------	--

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40

Pilot duty rating code

Duty Code
A600

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
75	--	--

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	20	1	1	1
AC	600	20	1	2	1
AC	600	20	3	3	1

ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ

Момент затяжки винтов

Момент затяжки (Нм)	Момент затяжки (фунт-дюйм)
1	9

Stripping length

Stripping length	Length (mm) --
	9 STRIPPINGLENGTH

Size of conductor

composition of conductor		Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,75mm²	Copper	
solid wire	Min.	2	0,75mm²	Copper	
flexible wire	Min.	1	0,75mm²	Copper	
flexible wire	Min.	2	0,75mm²	Copper	
flexible wire	Max.	2	AWG 12	Copper	
flexible wire	Max.	2	2,5mm²	Copper	
Single-core or stranded wire	Max.	2	AWG 10	Copper	
Single-core or stranded wire	Max.	2	4mm²	Copper	
flexible wire with ferrule according to DIN 46228	Min.	1	0,75mm²	Copper	
flexible wire with ferrule according to DIN 46228	Min.	2	0,75mm²	Copper	
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm²	Copper	

Approbations

Specification	Marking
EAC	
CE marking	
UK Directives	
CSA C.22.2 No.14	
GB/T14048.3	 GB/T14048.3

Рекомендуемая отвертка

Тип отвертки	Value
Крестовая отвёртка	PH1
Slot screwdriver according to DIN 5264	0,8x4

Общая информация

Текст

- Не смазывайте и не разбирайте контакты.

Общая информация

Текст

- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.
- После установки переключателей расстояния между клеммами должны быть достаточными для выполнения требований применимых стандартов.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-EF

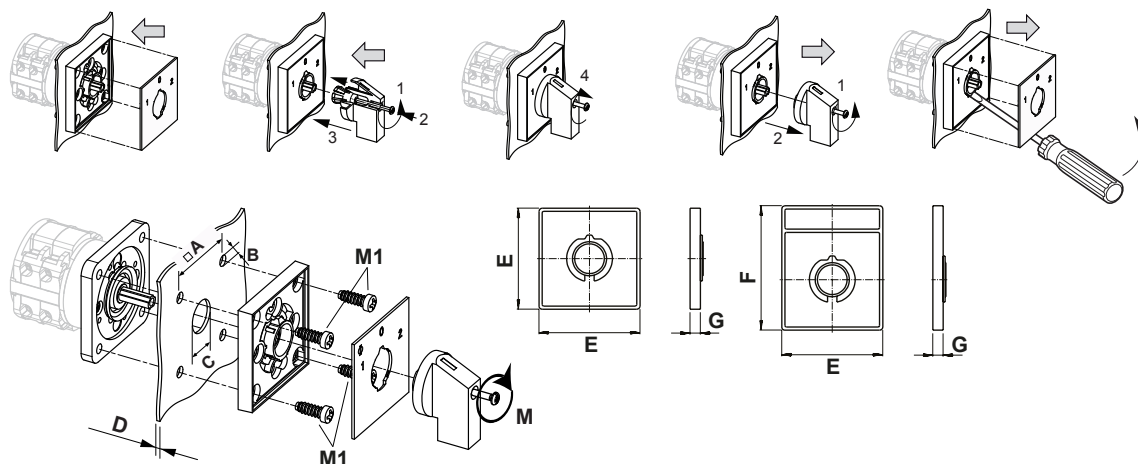

IP - Код лицевая сторона		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	□	36,00 mm
B	∅	5,00 mm
C	∅	15,00 - 19,00 mm
D	H	<= 4,00 mm
E	H	48,00 mm
F	H	59,00 mm
G	H	6,70 mm
M	⌘	0,50 Nm
M1	⌘	0,90 Nm

Wiring diagram

CH10.A178.EF

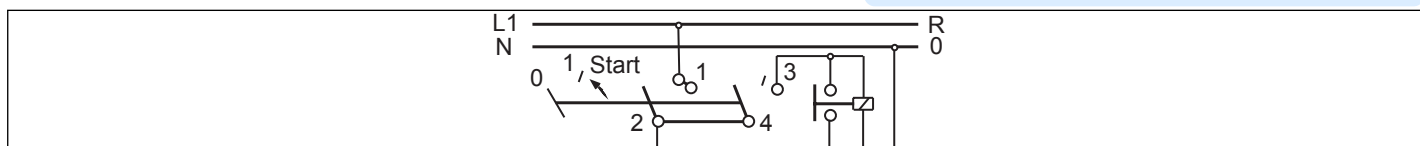



Switch program

CH10.A178.EF



Kraus & Naimer


CH10 **A178** **Page 1 of 1**

Face Plate														
			1	3	5	7	9	11	13	15	17	19	21	23
														
Switching Angle 90 Total switching Angle 120			2	4	6	8	10	12	14	16	18	20	22	24
	0	270												
		285												
		300												
		315												
		330												
		345												
	1	0												
		15												
	START	30												
		45												
		60												
		75												
		90												
		105												
		120												
		135												
		150												
		165												
		180												
		195												
	210													
	225													
	240													
	255													

Version: 131

Face plate

S0.F119/A1B.PEL

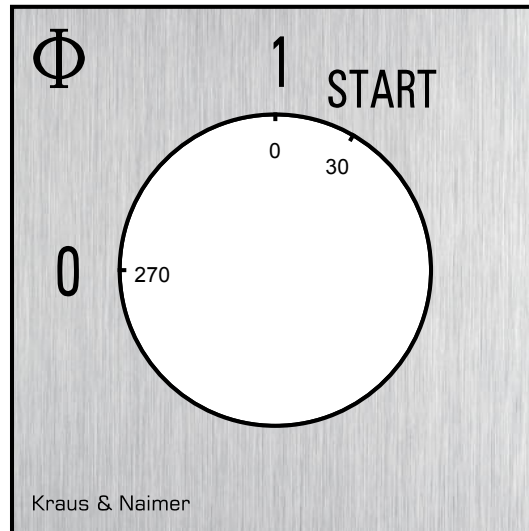

HANDLES

Designation: S0C.G251

Handle colour: "1" black

