

Sample image

Datasheet

Article number: 70014844

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Номинальное напряжение изоляции Ui						
Напряжение (В) Переменный ток/Постоянный ток						
690 AC / DC						
Номинальный длительный ток Iu/Ith						
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования			
20	55	60	Средняя температура окружающей среды +55°C в течение 24 часов с максимальным значением +60°C			
Номинальный рабочий ток Ie						
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)	
AC-15			220 - 240		6	
AC-15			380 - 440		4	
Номинальная рабочая мощность						
Категория применения		Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)
AC-3		220 - 240		3	3	3
AC-3		380 - 440		3	3	5,50
AC-3		660 - 690		3	3	5,50
AC-3		220 - 240		1	2	2,20
AC-3		380 - 440		1	2	3
AC-23A		220 - 240		3	3	3,70
AC-23A		380 - 440		3	3	7,50
AC-23A		660 - 690		3	3	7,50
AC-23A		220 - 240		1	2	2,50
AC-23A		380 - 440		1	2	3,70
Максимальный номинал предохранителя по IEC						
Характеристика предохранителя				Количество предохранителей		Сила тока (А)
gG				1		25
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Номинальное напряжение изоляции Ui						
Напряжение (В) Переменный ток/Постоянный ток						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
20		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles
DOL				110 - 120	1	2
DOL				220 - 240	1	2
DOL				277 - 277	1	2
DOL				440 - 480	1	2
DOL				550 - 600	1	2
DOL				110 - 120	3	3
DOL				220 - 240	3	3
DOL				440 - 480	3	3
DOL				550 - 600	3	3
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.						
Temp. rating of wire						
Temperature rating (°C)				Current (A) Text		
60 - 75				-- Use copper wire only		
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	20	1	2	1
AC	600	20	3	3	1

CSA

Nominal Voltage	1.2 V
------------------------	-------

	Voltage (V)	AC / DC
	600	AC

Номинальное напряжение изоляции U_i	
---------------------------------------	--

	Напряжение (В)	Переменный ток/Постоянный ток
	600 AC	

Rated thermal current	100 A
-----------------------	-------

Current (A)	Ambient temperature (°C)	Additional Text
20	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40

Pilot duty rating code

<i>Duty Code</i>	
------------------	--

A600

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
75	--	--

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	20	1	1	1
AC	600	20	1	2	1
AC	600	20	3	3	1

ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,75mm ²	Copper
solid wire	Min.	2	0,75mm ²	Copper
flexible wire	Min.	1	0,75mm ²	Copper
flexible wire	Min.	2	0,75mm ²	Copper
flexible wire	Max.	2	AWG 12	Copper
flexible wire	Max.	2	2,5mm ²	Copper
Single-core or stranded wire	Max.	2	AWG 10	Copper
Single-core or stranded wire	Max.	2	4mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0,75mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,75mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm ²	Copper

Stripping length

Length (mm) --

9 L

Рекомендуемая отвертка	
------------------------	--

Тип отвертки	Value
Крестовая отвёртка	PH1
Slot screwdriver according to DIN 5264	0,8x4

Момент затяжки винтов

Момент затяжки (Нм)	Момент затяжки (фунт-дюйм)
1	9

Approbations

Specification	Marking
EAC	
CE marking	
UK Directives	
CSA C.22.2 No.14	
GB/T14048.3	

Общая информация

Текст

- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.
- После установки переключателей расстояния между клеммами должны быть достаточными для выполнения требований применимых стандартов.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

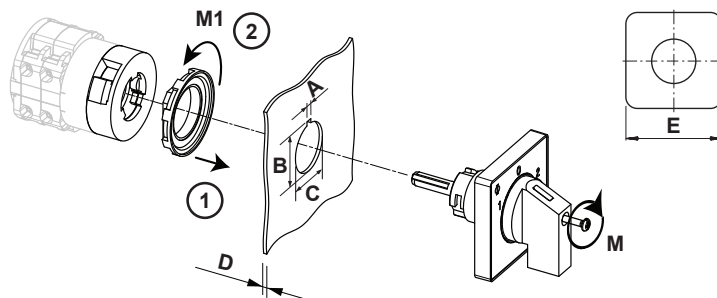

IP - Код лицевая сторона IP66, IP67, IP69k

Stages 1,00 - 12,00

A H 3,20 mm

A+_tol. H 0,20 mm

A-_tol. H 0,00 mm

B H 24,10 mm

B+_tol. H 0,40 mm

B-_tol. H 0,00 mm

C Ø 22,30 mm

C+_tol. Ø 0,40 mm

C-_tol. Ø 0,00 mm

D H ≤ 6,00 mm


E □ 48,00 mm

M ⚙ 0,50 Nm

M1 ⚙ 1,80 Nm

Wiring diagram

CH10.A243.FT2





Switch program

CH10.A243.FT2




Kraus & Naimer

CH10 **A243** **E** **Page 1 of 1**

Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
Switching Angle 30		2	4	6	8	10	12	14	16	18	20	22	24
Total switching Angle 150													
0	270												
	285												
1	300												
	315												
2	330												
	345												
3	0												
	15												
4	30												
	45												
5	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												

Version: 60



HANDLES

Designation: S0C.G251

Handle colour: "1" black

