

Sample image

Datasheet

Article number: 70023790

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
690 AC					
Номинальный длительный ток Iu/Ith					
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования		
32	50	55	Средняя температура окружающей среды +50°С в течение 24 часов с максимальным значением +55°С		
Номинальный рабочий ток Ie					
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)
AC-32A			20 - 400		32
Номинальная рабочая мощность					
Категория применения		Напряжение (диапазон) (В)		Количество фаз	Количество полюсов
AC-3		220 - 240		3	3
AC-3		380 - 440		3	3
AC-3		660 - 690		3	3
AC-23A		220 - 240		3	3
AC-23A		380 - 440		3	3
AC-23A		660 - 690		3	3
Максимальный номинал предохранителя по IEC					
Характеристика предохранителя				Количество предохранителей	Сила тока (А)
gG				1	35
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C)		Additional Text	
30		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting				Voltage (V)	No. of phases
DOL				110 - 120	1
DOL				200 - 208	1
DOL				220 - 240	1
DOL				277 - 277	1
DOL				415 - 415	1
DOL				440 - 480	1
DOL				550 - 600	1
DOL				110 - 120	3
DOL				200 - 240	3
DOL				415 - 415	3
DOL				440 - 480	3
DOL				550 - 600	3
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			-- --		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	30	1	1	1

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
Общая информация						
Текст						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
		Voltage (V) AC / DC				
		600 AC				
Номинальное напряжение изоляции Ui						
		Напряжение (В) Переменный ток/Постоянный ток				
		600 AC				
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		30	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles
DOL				110 - 120	1	2
DOL				220 - 240	1	2
DOL				277 - 277	1	2
DOL				415 - 415	1	2
DOL				440 - 480	1	2
DOL				550 - 600	1	2
DOL				110 - 120	3	3
DOL				220 - 240	3	3
DOL				415 - 415	3	3
DOL				440 - 480	3	3
DOL				550 - 600	3	3
Power (HP)						
Ambient temperature [°C]						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						
40						

Общая информация

Текст

- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-E

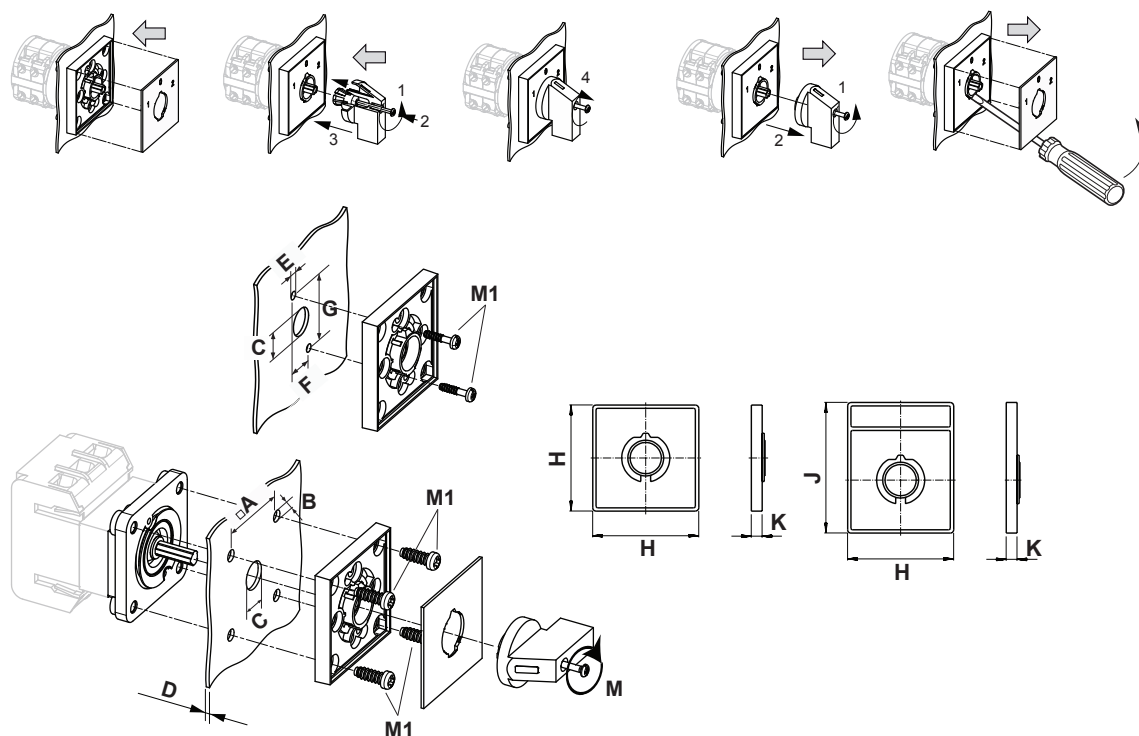


IP - Код лицевая сторона	IP66, IP67
Stages	1,00 - 12,00
A	□ 36,00 mm
B	∅ 5,00 mm
C	∅ 10,00 - 15,00 mm
D	H ≤ 4,00 mm
E	∅ 3,50 mm
F	H 12,20 mm
G	H 30,00 mm
H	H 48,00 mm
J	H 59,00 mm
K	H 6,30 mm
M	M̄ 0,50 Nm
M1	M̄ 0,90 Nm



Wiring diagram

KG32A.T304.E

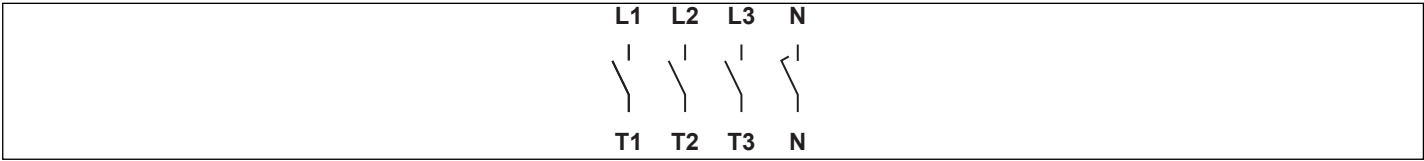


Switch program

KG32A.T304.E



Kraus & Naimer


KG32A
T304
Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
   									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

S0.F456/E10.E1LH

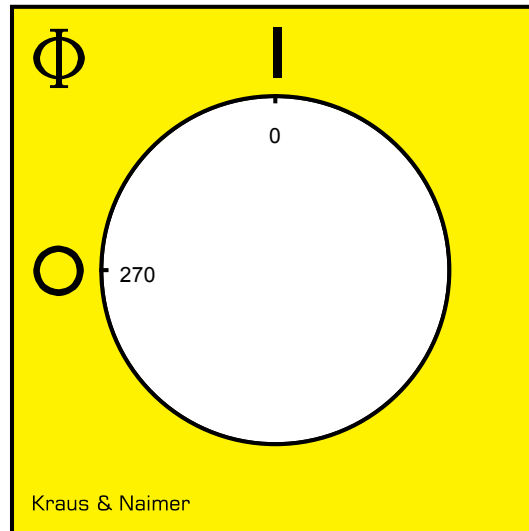

PADLOCK DEVICE

Designation: S0.V845/E11/A12

Face plate and handle unit: "E" face plate/yellow, frame/black, handle/red, locking push rod/yellow

Locking position: "1" at 09:00/03:00 - knockouts every 45°

Angular displacement: "1" 1 x 90°

Type of mounting: "A" for type of mounting E

Type of mounting: "A" for type of mounting GK

Type of version: "1" for same switch size

Switch type: "2" for KA-, KG- and KH(R)-switches

