



Sample image

Datasheet

Article number: 70024295

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
690 AC / DC					
Номинальный длительный ток Iu/Ith					
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования		
20	55	60	Средняя температура окружающей среды +55°C в течение 24 часов с максимальным значением +60°C		
Номинальный рабочий ток Ie					
Категория применения		Напряжение (диапазон) (В)		Сила тока (А)	
AC-15		220 - 240		6	
AC-15		380 - 440		4	
Номинальная рабочая мощность					
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240		3	3	3
AC-3	380 - 440		3	3	5,50
AC-3	660 - 690		3	3	5,50
AC-3	220 - 240		1	2	2,20
AC-3	380 - 440		1	2	3
AC-23A	220 - 240		3	3	3,70
AC-23A	380 - 440		3	3	7,50
AC-23A	660 - 690		3	3	7,50
AC-23A	220 - 240		1	2	2,50
AC-23A	380 - 440		1	2	3,70
Максимальный номинал предохранителя по IEC					
Характеристика предохранителя			Количество предохранителей		Сила тока (А)
gG			1		25
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C) Additional Text			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP) Ambient temperature [°C]
DOL		110 - 120	1	2	0,50 40
DOL		220 - 240	1	2	1 40
DOL		277 - 277	1	2	2 40
DOL		440 - 480	1	2	2 40
DOL		550 - 600	1	2	2 40
DOL		110 - 120	3	3	1,50 40
DOL		220 - 240	3	3	3 40
DOL		440 - 480	3	3	5 40
DOL		550 - 600	3	3	5 40
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			-- Use copper wire only		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	20	1	1	1

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	20	1	2	1	
AC	600	20	3	3	1	
CSA						
Nominal Voltage						
				Voltage (V)	AC / DC	
				600	AC	
Номинальное напряжение изоляции Ui						
				Напряжение (В)	Переменный ток/Постоянный ток	
				600	AC	
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		20	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting				Voltage (V)	No. of phases	Ambient temperature [°C]
DOL				110 - 120	1	40
DOL				220 - 240	1	40
DOL				277 - 277	1	40
DOL				440 - 480	1	40
DOL				550 - 600	1	40
DOL				110 - 120	3	40
DOL				220 - 240	3	40
DOL				440 - 480	3	40
DOL				550 - 600	3	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
			Temperature rating (°C)	Current (A)	Text	
			75	--	--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	
AC	600	20	1	2	1	
AC	600	20	3	3	1	
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ						
Момент затяжки винтов						
			Момент затяжки (Нм)	Момент затяжки (фунт-дюйм)		
			1	9		
Stripping length						
			Length (mm)	--		
			9	STRIPPINGLENGTH		
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	Material of the wire	
solid wire	Min.	1		0,75mm²	Copper	
solid wire	Min.	2		0,75mm²	Copper	
flexible wire	Min.	1		0,75mm²	Copper	
flexible wire	Min.	2		0,75mm²	Copper	
flexible wire	Max.	2		AWG 12	Copper	
flexible wire	Max.	2		2,5mm²	Copper	
Single-core or stranded wire	Max.	2		AWG 10	Copper	
Single-core or stranded wire	Max.	2		4mm²	Copper	
flexible wire with ferrule according to DIN 46228	Min.	1		0,75mm²	Copper	
flexible wire with ferrule according to DIN 46228	Min.	2		0,75mm²	Copper	
flexible wire with ferrule according to DIN 46228	Max.	2		2,5mm²	Copper	
Approbations						
Specification				Marking		
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Рекомендуемая отвертка						
Тип отвертки			Value			
Крестовая отвёртка			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
Общая информация						
Текст						
- Не смазывайте и не разбирайте контакты.						

Общая информация

Текст

- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.
- После установки переключателей расстояния между клеммами должны быть достаточными для выполнения требований применимых стандартов.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

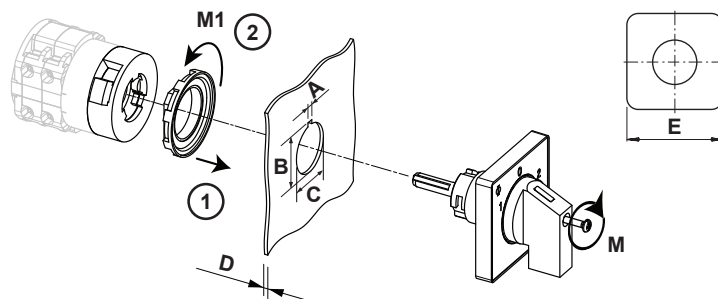


IP - Код лицевая сторона		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm



Wiring diagram

CH10.A292.FT2

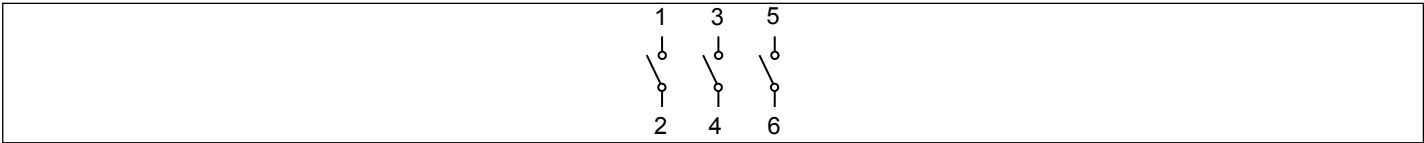


Switch program

CH10.A292.FT2



Kraus & Naimer


CH10
A292
Page 1 of 1

Face Plate														
														
		1	3	5	7	9	11	13	15	17	19	21	23	
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24	
0	270													
	285													
	300													
	315													
	330													
	345													
	1	0												
		15												
		30												
		45												
		60												
		75												
		90												
		105												
		120												
		135												
	150													
	165													
180														
195														
210														
225														
240														
255														

Version: 86

Face plate

S0.F456/A10.E1LH

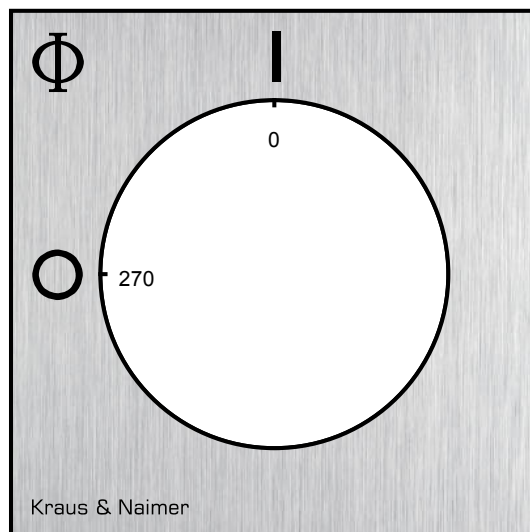


Designation: S0.V845/A11/D11

Angular displacement: "1" 1 x 90°

Type of version: "1" for same switch size

Switch type: "1" for C-switches and for KG10.

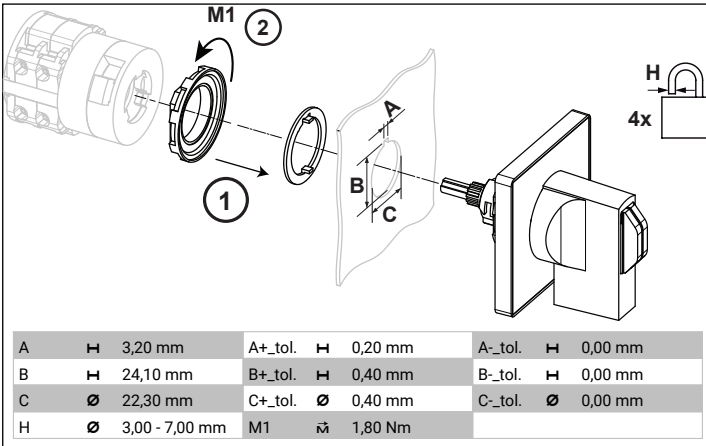

A	H	3,20 mm	A+.tol.	H	0,20 mm	A-.tol.	H	0,00 mm
B	H	24,10 mm	B+.tol.	H	0,40 mm	B-.tol.	H	0,00 mm
C	Ø	22,30 mm	C+.tol.	Ø	0,40 mm	C-.tol.	Ø	0,00 mm
H	Ø	3,00 - 7,00 mm	M1	↺	1,80 Nm			