

Sample image

Datasheet

Article number: 70024970

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107							
Номинальное напряжение изоляции Ui							
Напряжение (В) Переменный ток/Постоянный ток							
690 AC							
Номинальный длительный ток Iu/Ith							
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования				
25	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C				
Номинальный рабочий ток Ie							
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)		
AC-32A			20 - 400		20		
Номинальная рабочая мощность							
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)		
AC-3	220 - 240		3	3	4		
AC-3	380 - 440		3	3	5,50		
AC-3	660 - 690		3	3	5,50		
AC-23A	220 - 240		3	3	5,50		
AC-23A	380 - 440		3	3	7,50		
AC-23A	660 - 690		3	3	7,50		
Максимальный номинал предохранителя по IEC							
Характеристика предохранителя			Количество предохранителей		Сила тока (А)		
gG			1		35		
UL60947-4-1 , UL508							
Nominal Voltage							
Voltage (V) AC / DC							
600 AC							
Номинальное напряжение изоляции Ui							
Напряжение (В) Переменный ток/Постоянный ток							
600 AC							
Rated thermal current							
Current (A)		Ambient temperature (°C)		Additional Text			
25		0 - 40		--			
Horsepower rating							
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL			110 - 120	1	2	1	40
DOL			220 - 240	1	2	3	40
DOL			277 - 277	1	2	3	40
DOL			415 - 415	1	2	5	40
DOL			440 - 480	1	2	5	40
DOL			550 - 600	1	2	5	40
DOL			110 - 120	3	3	2	40
DOL			200 - 240	3	3	7,50	40
DOL			415 - 415	3	3	10	40
DOL			440 - 480	3	3	15	40
DOL			550 - 600	3	3	20	40
Pilot duty rating code							
Duty Code							
A600							
SCCR / Max. fuse rating							
Conditions of acceptability							
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.							
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.							
Temp. rating of wire							
Temperature rating (°C)			Current (A)			Text	
60 - 75			--			--	
General Use							
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series		
AC	277	25	1	1	1		
AC	600	25	1	2	1		

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	25	3	3	1	
Общая информация						
Текст						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Номинальное напряжение изоляции Ui						
Напряжение (В) Переменный ток/Постоянный ток						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C)		Additional Text		
25		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	1	40
DOL		220 - 240	1	2	3	40
DOL		277 - 277	1	2	3	40
DOL		415 - 415	1	2	5	40
DOL		440 - 480	1	2	5	40
DOL		550 - 600	1	2	5	40
DOL		110 - 120	3	3	2	40
DOL		220 - 240	3	3	7,50	40
DOL		415 - 415	3	3	10	40
DOL		440 - 480	3	3	15	40
DOL		550 - 600	3	3	20	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
Temperature rating (°C)		Current (A)		Text		
75		--		--		
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	25	1	1	1	
AC	600	25	1	2	1	
AC	600	25	3	3	1	
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ						
Момент затяжки винтов						
Момент затяжки (Нм)			Момент затяжки (фунт-дюйм)			
1,25			11			
Stripping length						
Length (mm) --						
9 STRIPPINGLENGTH						
Size of conductor						
composition of conductor		Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	Material of the wire
flexible wire		Max.	1		AWG 10	Copper
flexible wire		Max.	1		4mm²	Copper
Single-core or stranded wire		Max.	1		6mm²	Copper
Single-core or stranded wire		Max.	1		AWG 10	Copper
flexible wire with sleeve		Max.	1		4mm²	Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Рекомендуемая отвертка						
Тип отвертки				Value		
Крестовая отвёртка				PH2		
Slot screwdriver according to DIN 5264				0,8x4		
Общая информация						
Текст						
- Примечание по электромагнитной совместимости: это устройство подходит для использования в среде А и В.						

Общая информация

Текст

- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

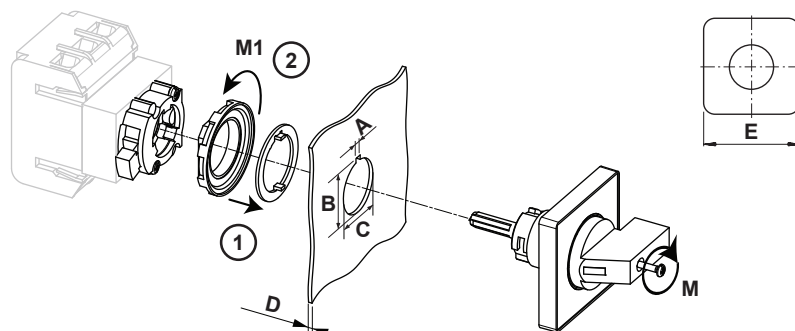

IP - Код лицевая сторона		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	M	0,50 Nm
M1	M	1,80 Nm



Wiring diagram

KG20A.T303.FT2



Switch program

KG20A.T303.FT2



Kraus & Naimer

KG20A
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0								
	90								
	180								

Version: 102

Face plate

S1.F456/C10.V11H





Sample image

PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/A71/F21

Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "F" for type of mounting *FT2 and *FH3

Switch type: "2" for KA-, KG- and KH(R)-switches

Type of version: "1" for next smaller switch size (IP65)

