



Sample image

Datasheet

Article number: 70025247

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
690 AC					
Номинальный длительный ток Iu/Ith					
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования		
32	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C		
Номинальный рабочий ток Ie					
Категория применения			Напряжение (диапазон) (В)		Сила тока (А)
AC-32A			20 - 400		32
Номинальная рабочая мощность					
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240		3	3	5,50
AC-3	380 - 440		3	3	7,50
AC-3	660 - 690		3	3	7,50
AC-23A	220 - 240		3	3	5,50
AC-23A	380 - 440		3	3	11
AC-23A	660 - 690		3	3	11
Максимальный номинал предохранителя по IEC					
Характеристика предохранителя			Количество предохранителей		Сила тока (А)
gG			1		35
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Номинальное напряжение изоляции Ui					
Напряжение (В) Переменный ток/Постоянный ток					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C) Additional Text			
30		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	1,50	40
DOL	200 - 208	1	2	3	40
DOL	220 - 240	1	2	5	40
DOL	277 - 277	1	2	5	40
DOL	415 - 415	1	2	5	40
DOL	440 - 480	1	2	7,50	40
DOL	550 - 600	1	2	7,50	40
DOL	110 - 120	3	3	3	40
DOL	200 - 240	3	3	10	40
DOL	415 - 415	3	3	10	40
DOL	440 - 480	3	3	20	40
DOL	550 - 600	3	3	25	40
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			-- --		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	30	1	1	1

General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	600	30	1	2	1			
AC	600	30	3	3	1			
Общая информация								
Текст								
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.								
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.								
CSA								
Nominal Voltage								
				Voltage (V) AC / DC				
				600 AC				
Номинальное напряжение изоляции Ui								
				Напряжение (В) Переменный ток/Постоянный ток				
				600 AC				
Rated thermal current								
		Current (A)	Ambient temperature (°C)		Additional Text			
		30	0 - 40		--			
Horsepower rating								
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL				110 - 120	1	2	1,50	40
DOL				220 - 240	1	2	5	40
DOL				277 - 277	1	2	5	40
DOL				415 - 415	1	2	5	40
DOL				440 - 480	1	2	7,50	40
DOL				550 - 600	1	2	7,50	40
DOL				110 - 120	3	3	3	40
DOL				220 - 240	3	3	10	40
DOL				415 - 415	3	3	10	40
DOL				440 - 480	3	3	20	40
DOL				550 - 600	3	3	25	40
Pilot duty rating code								
Duty Code								
A600								
Temp. rating of wire								
			Temperature rating (°C)	Current (A)		Text		
			75	--		--		
General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	277	30	1	1	1			
AC	600	30	1	2	1			
AC	600	30	3	3	1			
ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ								
Момент затяжки винтов								
			Момент затяжки (Нм)		Момент затяжки (фунт-дюйм)			
			1,25		11			
Stripping length								
			Length (mm) --					
			9 STRIPPINGLENGTH					
Size of conductor								
composition of conductor		Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire		
solid wire		Min.	1	0,75mm²		Copper		
solid wire		Min.	2	0,5mm²		Copper		
flexible wire		Min.	2	0,75mm²		Copper		
flexible wire		Max.	1	AWG 10		Copper		
flexible wire		Max.	1	4mm²		Copper		
flexible wire		Min.	1	1,5mm²		Copper		
Single-core or stranded wire		Max.	1	6mm²		Copper		
Single-core or stranded wire		Max.	1	AWG 10		Copper		
flexible wire with sleeve		Max.	1	4mm²		Copper		
flexible wire with ferrule according to DIN 46228		Min.	1	0,75mm²		Copper		
flexible wire with ferrule according to DIN 46228		Min.	2	0,5mm²		Copper		
Approbations								
Specification						Marking		
EAC								
CE marking								
UK Directives								
CSA C.22.2 No.14								
GB/T14048.3								

Рекомендуемая отвертка

Тип отвертки	Value
Крестовая отвёртка	PH2
Slot screwdriver according to DIN 5264	0,8x4

Общая информация

- Текст**
- Примечание по электромагнитной совместимости: это устройство подходит для использования в среде А и В.
 - Не смазывайте и не разбирайте контакты.
 - Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
 - Используйте только медные провода. Не покрывать конец провода оловом.
 - Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-KL51V

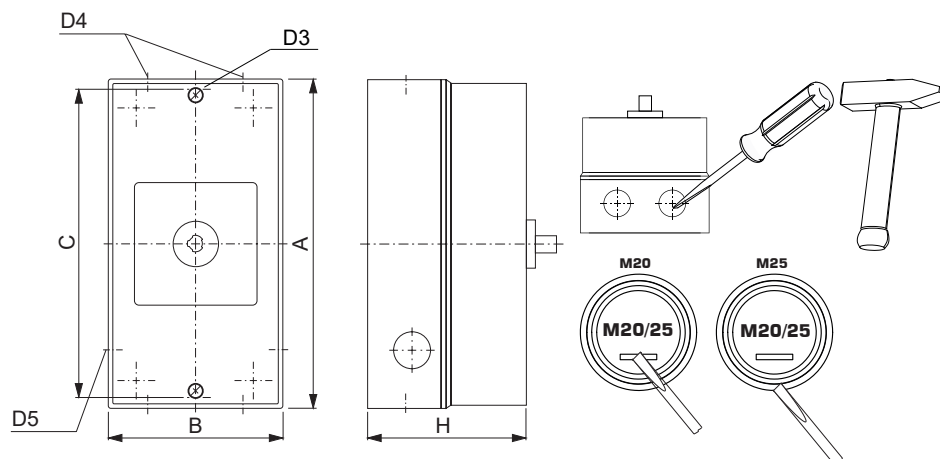

IP - Код лицевая сторона	IP66, IP67, IP69k
Stages	1,00 - 5,00
A	H 160,00 mm
B	H 85,00 mm
C	H 150,00 mm
D3	Ø 4,20 mm
D4	Ø 4,00 x M20/M25
D5	Ø 2,00 x M20
H	H 82,00 mm



Wiring diagram

KG32.T304.KL51V



Switch program

KG32.T304.KL51V

 Kraus & Naimer		KG32		T304		Page 1 of 1			
Face Plate									
		L1 1	L2 3	L3 5	N 7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2 T1	4 T2	6 T3	8 N	10	12	14	16
0	270								
1	0								
	90								
	180								

Version: 94

Face plate

S1.F656/E10.V9

