



Sample image

Datasheet

Article number: 70004811

Designation: CA11.A326.PF1

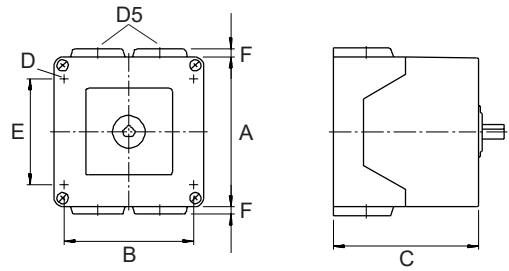
Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Märkdraftspänning Ui						
Spänning (V) AC / DC						
690 AC / DC						
Märkdraftström vid konstant drift						
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C)	ytterligare krav			
20	55	60	Omginingstemperatur +55°C under 24 timmar med toppar upp till +60°C			
Märkdraftström Ie						
Urvals kriterie		Spänning (V)		Ström (A)		
AC-15		220 - 240		6		
AC-15		380 - 440		4		
Märkdrafteffekt						
Urvals kriterie	Spänning (V)	No. of phases	No. of poles	Effekt (kW)		
AC-3	220 - 240	3	3	3		
AC-3	380 - 440	3	3	5,50		
AC-3	660 - 690	3	3	5,50		
AC-3	220 - 240	1	2	2,20		
AC-3	380 - 440	1	2	3		
AC-23A	220 - 240	3	3	3,70		
AC-23A	380 - 440	3	3	7,50		
AC-23A	660 - 690	3	3	7,50		
AC-23A	220 - 240	1	2	2,50		
AC-23A	380 - 440	1	2	3,70		
Max försäkring, IEC						
Säkringskaraktéristik			Antal säkringar	Ström (A)		
gG			1	25		
UL60947-4-1 , UL508						
Nominal Voltage						
Spänning (V) AC / DC						
600 AC						
Märkdraftspänning Ui						
Spänning (V) AC / DC						
600 AC						
Rated thermal current						
Ström (A)		Omgivningstemperatur (°C) Additional Text				
20		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing		110 - 120	1	2	0,17	40
Reversing		220 - 240	1	2	0,50	40
Reversing		277 - 277	1	2	0,60	40
Reversing		415 - 415	1	2	1	40
Reversing		440 - 480	1	2	1,50	40
Reversing		550 - 600	1	2	1,50	40
Reversing		110 - 120	3	3	0,50	40
Reversing		220 - 240	3	3	1	40
Reversing		415 - 415	3	3	2	40
Reversing		440 - 480	3	3	3	40
Reversing		550 - 600	3	3	3	40
DOL		110 - 120	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	2	40
DOL		440 - 480	1	2	2	40
DOL		550 - 600	1	2	2	40
DOL		110 - 120	3	3	1,50	40
DOL		220 - 240	3	3	3	40
DOL		415 - 415	3	3	5	40
DOL		440 - 480	3	3	5	40
DOL		550 - 600	3	3	5	40

Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.					
Temp. rating of wire					
Temperature rating (°C)			Ström (A) Text		
60 - 75			– Use copper wire only		
Connecting instructions					
Markings					
När brytaren används som säkerhetsbrytare skall den vara utrustad med vred som är låsbart i läge "0".					
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	20	1	2	1
AC	600	20	3	3	1
CSA					
Nominal Voltage					
			Spänning (V) AC / DC		
			600 AC		
Märkdriftspänning Ui					
			Spänning (V) AC / DC		
			600 AC		
Rated thermal current					
		Ström (A)	Omgivningstemperatur (°C)		Additional Text
		20	0 - 40		–
Horsepower rating					
Across-the-Line Motor Starting	Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	415 - 415	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	415 - 415	3	3	5	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40
Pilot duty rating code					
Duty Code					
A600					
Temp. rating of wire					
Temperature rating (°C)			Ström (A) Text		
75			– only		
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	20	1	1	1
GENERAL TECHNICAL INFORMATION					
Tightening torque of screws					
			tightening torque (Nm)	tightening torque (lb-in)	
			0,60	5	
Stripping length					
			Length (mm) –		
			8 STRIPPINGLENGTH		
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1		0,5mm²	Copper
solid wire	Min.	2		0,5mm²	Copper
flexible wire	Min.	1		0,75mm²	Copper
flexible wire	Min.	2		0,75mm²	Copper
flexible wire	Max.	2		2,5mm²	Copper
flexible wire	Max.	2		AWG 14	Copper
Single-core or stranded wire	Max.	2		AWG 12	Copper
Single-core or stranded wire	Max.	2		2,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1		0,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2		2,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2		0,5mm²	Copper
Approbations					
Specification					Marking
EAC					
CE marking					

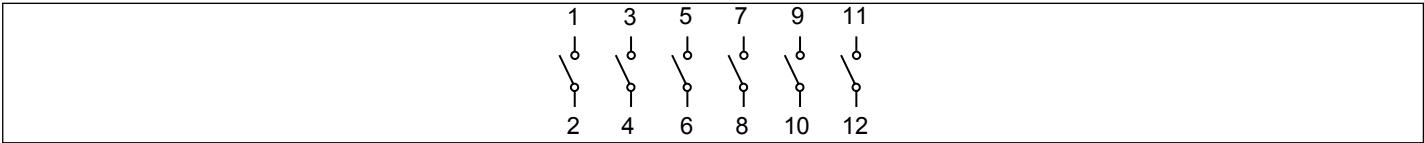
Approbations	
Specification	Marking
UK Directives	UK CA
CSA C.22.2 No.14	SA®
Rekomenderad skruvmejsel	
Typ av skruvmejsel	Value
Stjärnskruvmejsel	PH1
Slot screwdriver according to DIN 5264	0,8x4
General Information	
Text	
- Smörjning och behandling av kontakterna är förbjuden. - Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri. - Använd endast kopparkabel. Kabeln får inte förtennas. - Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar. - Vid installation av strömställaren skall kontrolleras att kryp- och luftavstånd motsvarar gällande föreskrifter.	
Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com
Proposition 65	
Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

Mounting-PF1	
	
Skyddsklass frontpanel, IP	IP65
Stages	3,00 - 4,00
A	□ 82,00 mm
B	H 68,00 mm
C	H 90,10 mm
D	Ø 4,40 mm
D5	Ø 4,00 x M20
E	H 52,00 mm
F	H 5,00 mm

Wiring diagram

CA11.A326.PF1





Switch program

CA11.A326.PF1



Kraus & Naimer

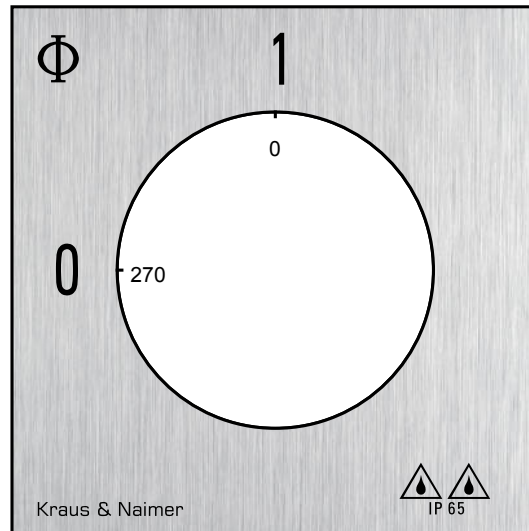
CA11
A326
Page 1 of 1

Face Plate																									
		1		3		5		7		9		11		13		15		17		19		21		23	
																									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24												
0	270																								
	285																								
	300																								
	315																								
	330																								
	345																								
1	0																								
	15																								
	30																								
	45																								
	60																								
	75																								
	90																								
	105																								
	120																								
	135																								
	150																								
	165																								
	180																								
	195																								
	210																								
	225																								
	240																								
	255																								

Version: 67

Face plate

S1.F056/A10.PFL



HANDLES

Designation: S1B.G257

Handle colour: "7" electro grey

