

Sample image

Datasheet

Article number: 70010872


Designation: KG250.T103/05.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Märkdriftspänning Ui					
Spänning (V) AC / DC					
1000 AC					
Märkdriftström vid konstant drift					
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav			
250	50	55 Omginingstemperatur +50°C under 24 timmar med toppar upp till +55°C			
Märkdrifteffekt					
Urvals kriterie	Spänning (V)	No. of phases	No. of poles	Effekt (kW)	
AC-3	220 - 240	3	3	37	
AC-3	380 - 440	3	3	55	
AC-3	660 - 690	3	3	40	
AC-23A	220 - 240	3	3	37	
AC-23A	380 - 440	3	3	90	
AC-23A	660 - 690	3	3	45	
Max försäkring, IEC					
Säkringskaraktäristik	Antal säkringar			Ström (A)	
gG	1			250	
UL60947-4-1 , UL508					
Nominal Voltage					
Spänning (V) AC / DC					
600 AC					
Märkdriftspänning Ui					
Spänning (V) AC / DC					
600 AC					
Rated thermal current					
Ström (A)		Omgivningstemperatur (°C) Additional Text			
250		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	15	40
DOL	220 - 240	1	2	30	40
DOL	277 - 277	1	2	30	40
DOL	440 - 480	1	2	45	40
DOL	550 - 600	1	2	50	40
DOL	110 - 120	3	3	30	40
DOL	220 - 240	3	3	60	40
DOL	440 - 480	3	3	75	40
DOL	550 - 600	3	3	75	40
SCCR / Max. fuse rating					
Conditions of acceptability					
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 400A Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)		Ström (A) Text			
75		-- --			
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	250	1	1	1
AC	600	250	1	2	1
AC	600	250	3	3	1
General Information					
Text					
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.					
CSA					
Nominal Voltage					
Spänning (V) AC / DC					
600 AC					

Märkdraftspänning Ui						
Spänning (V) AC / DC						
600 AC						
Rated thermal current						
Ström (A)		Omgivningstemperatur (°C)		Additional Text		
250		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	15	40
DOL		220 - 240	1	2	30	40
DOL		277 - 277	1	2	30	40
DOL		440 - 480	1	2	45	40
DOL		550 - 600	1	2	50	40
DOL		110 - 120	3	3	30	40
DOL		220 - 240	3	3	60	40
DOL		440 - 480	3	3	75	40
DOL		550 - 600	3	3	75	40
Temp. rating of wire						
Temperature rating (°C)		Ström (A)		Text		
75		--		--		
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	250	1	1	1	
AC	600	250	1	2	1	
AC	600	250	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1		16mm²		Copper
flexible wire	Max.	1		MCM 300		Copper
flexible wire	Max.	1		150mm²		Copper
flexible wire	Min.	1		25mm²		Copper
Single-core or stranded wire	Max.	1		185mm²		Copper
Single-core or stranded wire	Max.	1		MCM 350		Copper
flexible wire with sleeve	Max.	1		120mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	1		16mm²		Copper
Stripping length						
Length (mm) --						
						
Rekomenderad skruvmejsel						
Typ av skruvmejsel		Value				
Insex		6				
Tightening torque of screws						
tightening torque (Nm)				tightening torque (lb-in)		
16				140		
Approbations						
Specification				Marking		
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
General Information						
Text						
- Smörjning och behandling av kontakterna är förbjuden. - Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri. - Använd endast kopparkabel. Kabeln får inte förtennas. - Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.						
Waste Electrical & Electronic Equipment (WEEE)						
Picture name	Description					
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com					
Proposition 65						
Picture name	Description					
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .					
Classification Contact: Rigid contact bridge						
Classification Contact Mat: Silver						
Classification Terminal: Screw terminal						


Mounting-E

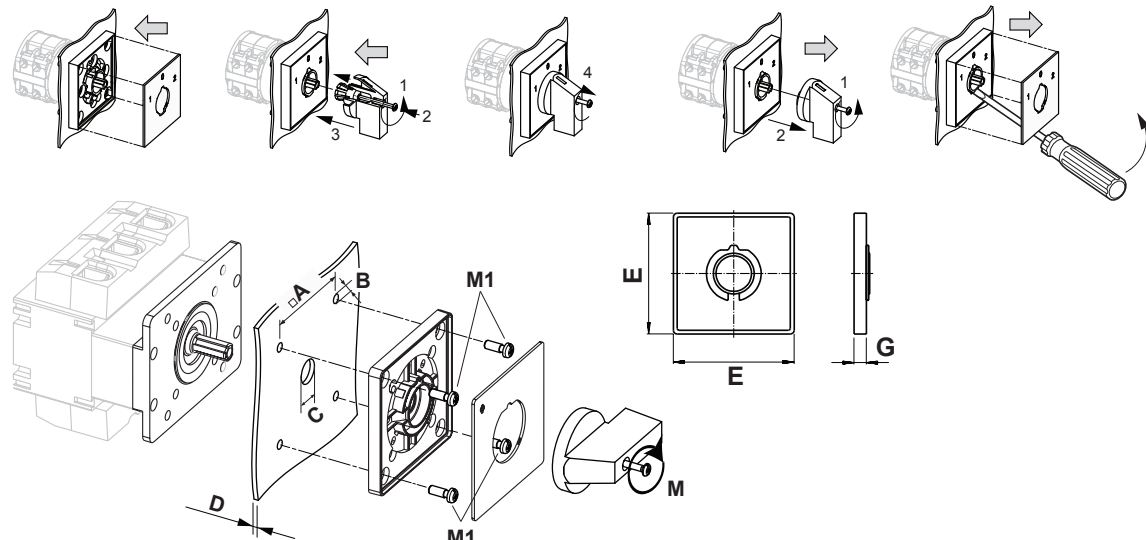

Skyddsklass frontpanel, IP		IP66, IP67
Stages		1,00 - 5,00
A	□	68,00 mm
B	∅	6,00 mm
C	∅	13,00 - 17,00 mm
D	H	<= 5,50 mm
E	H	88,00 mm
G	H	8,50 mm
M	M̂	1,20 Nm
M1	M̂	1,50 Nm

Wiring diagram

KG250.T303.E

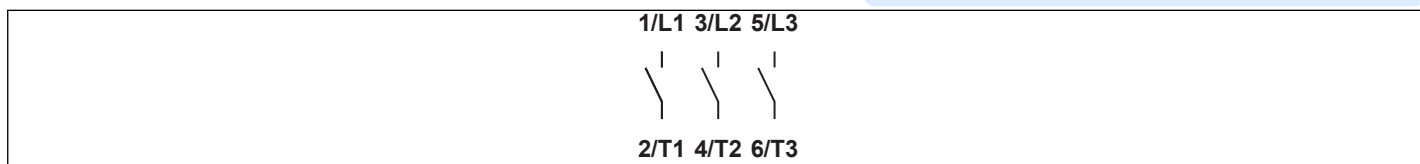


Switch program

KG250.T303.E



Kraus & Naimer


KG250
T303
Page 1 of 1

Face Plate									
	1	1/L1 1	3/L2 3	5/L3 5	7	9	11	13	15
	0								
Switching Angle	90	2	4	6	8	10	12	14	16
Total switching Angle	90	2/T1	4/T2	6/T3					
0	270								
1	0	■	■	■					
	90								
	180								

Version: 84

Face plate

S1.F456/A10.M1H

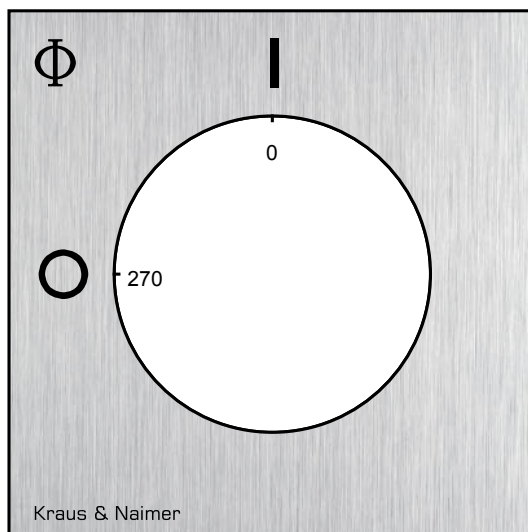

PADLOCK DEVICE

Designation: S2.V845/A11/A12

Face plate and handle unit: "A" face plate/alu, frame/black, handle/black, locking push rod/red

Locking position: "1" at 270°+90° - knockouts every 45°

Angular displacement: "1" 1 x 90°

Type of mounting: "A" for type of mounting E

Type of version: "1" for same switch size

Switch type: "2" for KA-, KG- and KH(R)-switches

