



Sample image

Datasheet

Article number: 70012192


Designation: CG4.A244.FS2-V

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
440 AC / DC						
Märkdriftström vid konstant drift						
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav				
10	55	60 Omginingstemperatur +55°C under 24 timmar med toppar upp till +60°C				
Märkdriftström Ie						
Urvals kriterie		Spänning (V)		Ström (A)		
AC-15		220 - 240		2,50		
AC-15		380 - 440		1,50		
Märkdrifteffekt						
Urvals kriterie	Spänning (V)	No. of phases	No. of poles	Effekt (kW)		
AC-3	220 - 240	3	3	1,50		
AC-3	380 - 440	3	3	2,20		
AC-3	220 - 240	1	2	0,55		
AC-3	380 - 440	1	2	0,75		
AC-23A	220 - 240	3	3	1,80		
AC-23A	380 - 440	3	3	3		
AC-23A	220 - 240	1	2	0,75		
AC-23A	380 - 440	1	2	1,10		
Max försäkring, IEC						
Säkringskaraktäristik			Antal säkringar	Ström (A)		
gG			1	10		
UL60947-4-1 , UL508						
Nominal Voltage						
Spänning (V) AC / DC						
300 AC						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
300 AC						
Rated thermal current						
Ström (A)		Omgivningstemperatur (°C) Additional Text				
10		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	0,33	40
DOL		220 - 240	1	2	0,75	40
DOL		277 - 277	1	2	0,75	40
DOL		110 - 120	3	3	0,75	40
DOL		220 - 240	3	3	1	40
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
Temperature rating (°C)			Ström (A) Text			
60 - 75			-- Use copper wire only			
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	120	10	1	1	1	
AC	300	10	1	2	1	
AC	300	10	3	3	1	
CSA						
Nominal Voltage						
Spänning (V) AC / DC						
300 AC						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
300 AC						

Rated thermal current						
Ström (A)			Omgivningstemperatur (°C)		Additional Text	
10			0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	0,33	40
DOL		220 - 240	1	2	0,75	40
DOL		277 - 277	1	2	0,75	40
DOL		110 - 120	3	3	0,75	40
DOL		220 - 240	3	3	1	40
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
Temperature rating (°C)			Ström (A)		Text	
75			--		--	
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	120	10	1	1	1	
AC	300	10	1	2	1	
AC	300	10	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			0,40		3,50	
Stripping length						
			Length (mm) --			
			6 STRIPPINGLENGTH			
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1		0,5mm²		Copper
solid wire	Min.	2		0,5mm²		Copper
flexible wire	Min.	1		0,75mm²		Copper
flexible wire	Min.	2		0,75mm²		Copper
flexible wire	Max.	2		AWG 16		Copper
flexible wire	Max.	2		1,5mm²		Copper
Single-core or stranded wire	Max.	2		AWG 14		Copper
Single-core or stranded wire	Max.	2		1,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Max.	2		1mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	1		0,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	2		0,5mm²		Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Rekomenderad skruvmejsel						
Typ av skruvmejsel			Value			
Stjärnskruvmejsel			PH1			
Slot screwdriver according to DIN 5264			0,6x3,5			
General Information						
Text						
- Smörjning och behandling av kontaktarna är förbjuden. - Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri. - Använd endast koparkabel. Kabeln får inte förtennas. - Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar. - Vid installation av strömställaren skall kontrolleras att kryp- och luftavstånd motsvarar gällande föreskrifter.						
Waste Electrical & Electronic Equipment (WEEE)						
Picture name	Description					
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com					
Proposition 65						
Picture name	Description					
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .					
Classification Contact: Rigid contact bridge						
Classification Contact Mat: Silver						
Classification Terminal: Screw terminal						

Mounting-FS2-V

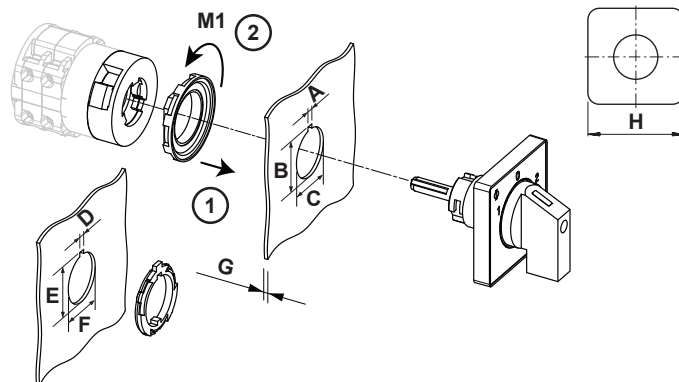

Skyddsklass frontpanel, IP

IP66, IP67, IP69k

Stages

1,00 - 8,00

A

H

1,70 mm

A+_tol.

H

0,20 mm

A-_tol.

H

0,00 mm

B

H

17,90 mm

B+_tol.

H

0,20 mm

B-_tol.

H

0,00 mm

C

Ø

16,20 mm

C+_tol.

Ø

0,20 mm

C-_tol.

Ø

0,00 mm

D

H

3,20 mm

D+_tol.

H

0,20 mm

D-_tol.

H

0,00 mm

E

H

24,10 mm

E+_tol.

H

0,40 mm

E-_tol.

H

0,00 mm

F

Ø

22,30 mm

F+_tol.

Ø

0,40 mm

F-_tol.

Ø

0,00 mm

G

H

<= 5,00 mm

H

H

30,00 mm


M1

⌀

0,70 Nm

Wiring diagram

CG4.A244.FS2-V





Switch program

CG4.A244.FS2-V



Kraus & Naimer


CG4 **A244** **Page 1 of 1**

Face Plate																									
		1		3		5		7		9		11		13		15		17		19		21		23	
																									
Switching Angle 30 Total switching Angle 180		2		4		6		8		10		12		14		16		18		20		22		24	
0	270																								
1	285																								
2	300																								
3	315																								
4	330																								
5	345																								
6	0																								
7	15																								
8	30																								
9	45																								
10	60																								
11	75																								
12	90																								
13	105																								
14	120																								
15	135																								
16	150																								
17	165																								
18	180																								
19	195																								
20	210																								
21	225																								
22	240																								
23	255																								

Version: 62

Face plate

S00.F004/A10.E1

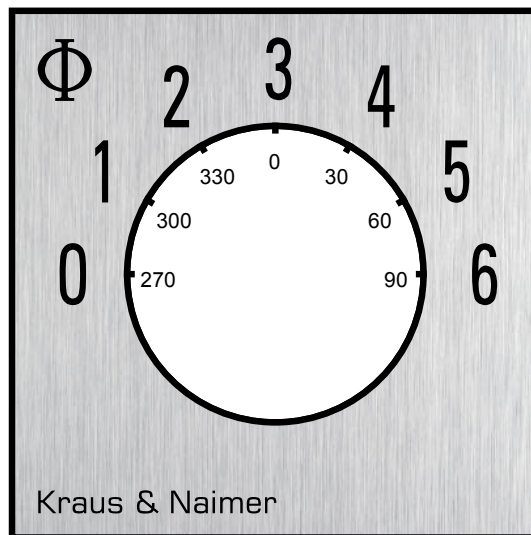

HANDLES

Designation: S00.G251

Handle colour: "1" black

