



Sample image

Datasheet

Article number: 70012786

Designation: KG100C.T106/41.STM

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Märkdraftspänning Ui					
Spänning (V) AC / DC					
690 AC					
Märkdraftström vid konstant drift					
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav			
100	50	55 Omginingstemperatur +50°C under 24 timmar med toppar upp till +55°C			
Märkdraftström Ie					
Urvals kriterie		Spänning (V)			Ström (A)
AC-32A		20 - 400			100
Märkdrafteffekt					
Urvals kriterie	Spänning (V)	No. of phases		No. of poles	Effekt (kW)
AC-3	220 - 240	3		3	18,50
AC-3	380 - 440	3		3	30
AC-3	660 - 690	3		3	22
AC-23A	220 - 240	3		3	22
AC-23A	380 - 440	3		3	37
AC-23A	660 - 690	3		3	30
Max försäkring, IEC					
Säkringskaraktäristik				Antal säkringar	Ström (A)
gG				1	100
UL60947-4-1 , UL508					
Nominal Voltage					
Spänning (V) AC / DC					
600 AC					
Märkdraftspänning Ui					
Spänning (V) AC / DC					
600 AC					
Rated thermal current					
Ström (A)		Omgivningstemperatur (°C)		Additional Text	
100		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)
DOL		110 - 120	1	2	5
DOL		220 - 240	1	2	15
DOL		277 - 277	1	2	15
DOL		415 - 415	1	2	25
DOL		440 - 480	1	2	30
DOL		550 - 600	1	2	30
DOL		110 - 120	3	3	10
DOL		220 - 240	3	3	25
DOL		415 - 415	3	3	40
DOL		440 - 480	3	3	50
DOL		550 - 600	3	3	50
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.					
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.					
Temp. rating of wire					
Temperature rating (°C)		Ström (A) Text			
75		-- --			
Connecting instructions					
Markings					
Break all lines.					
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	100	1	1	1
AC	600	100	1	2	1
AC	600	100	3	3	1

General Information

Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.
- När brytaren används som säkerhetsbrytare skall den vara utrustad med vred som är låsbart i läge "0".

CSA

Nominal Voltage

Spänning (V) AC / DC
600 AC

Märkdriftspänning UI

Spänning (V) AC / DC
600 AC

Rated thermal current

Ström (A) Omgivningstemperatur (°C) Additional Text
100 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	15	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	25	40
DOL	440 - 480	1	2	30	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	40	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire

Temperature rating (°C) Ström (A) Text
75 -- --

General Use

AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	100	1	1	1
AC	600	100	1	2	1
AC	600	100	3	3	1

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	1	35mm ²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm ²	Copper
flexible wire with sleeve	Max.	1	35mm ²	Copper

Stripping length

Length (mm) --



Rekomenderad skruvmejsel

Typ av skruvmejsel	Value
Stjärnskruvmejsel	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm) tightening torque (lb-in)
3 27

Approbations

Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

General Information

Text

- EMC Note: This device is suitable for use in environment A and B.
- Smörjning och behandling av kontaktarna är förbjuden.
- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast koparkabel. Kabeln får inte förtennas.

Marking



Text	
- Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.	
Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Classification Contact Mat: Silver


Classification Terminal: Screw terminal

M	$\vec{M}$	1,20 Nm
---	-----------	---------



Wiring diagram

KG100C.T306.VE

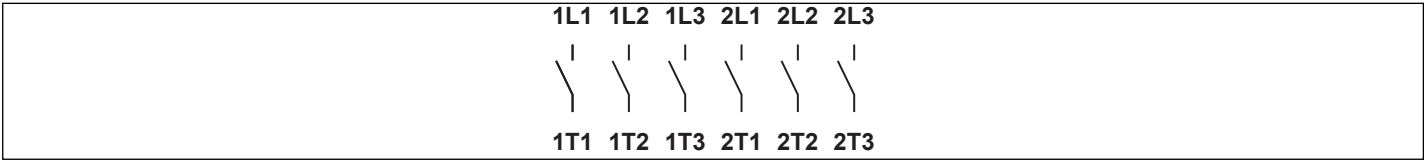


Switch program

KG100C.T306.VE



Kraus & Naimer


KG100C	T306	VE	Page 1 of 1
---------------	-------------	-----------	--------------------

Face Plate		1L1	1L2	1L3	2L1	2L2	2L3		
		1	3	5	7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		1T1	1T2	1T3	2T1	2T2	2T3		
0	270								
1	0								
	90								
	180								

Version: 117

Face plate

S2.F456/C10.V11

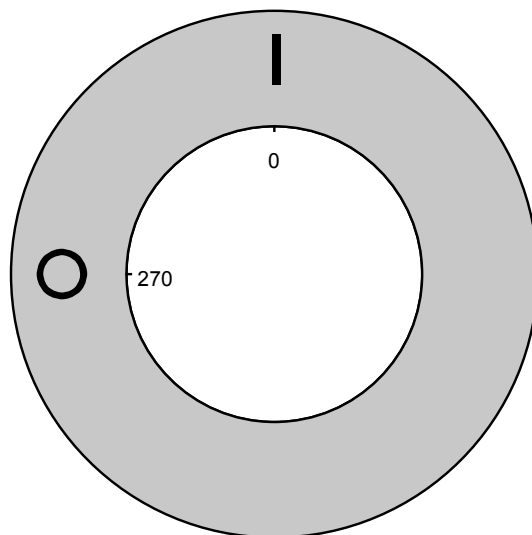



Sample image

PADLOCK DEVICE


with F-handle ring for type of mounting E, EF, E22, FT, VE, GK, PN, PF, KS (S00)

Designation: S2.V840D/B7-J

Colour of F-handle ring: "B" electro-grey

Colour of face ring: "7" electro-grey

Type of mounting: "-J" for type of mounting VE for KG80C/KG100C

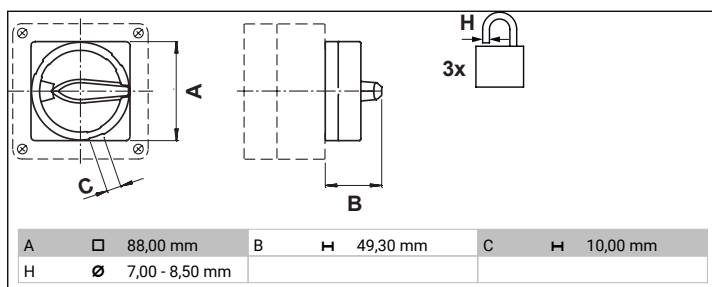



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)

Designation: S1.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch



Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF" splash proof (IP66/67)




A	□	48,00 mm	B	∅	5,00 mm	C	∅	19,00 - 22,00 mm
D	H	4,00 mm						

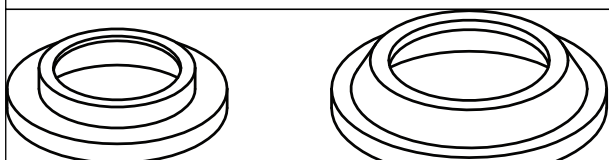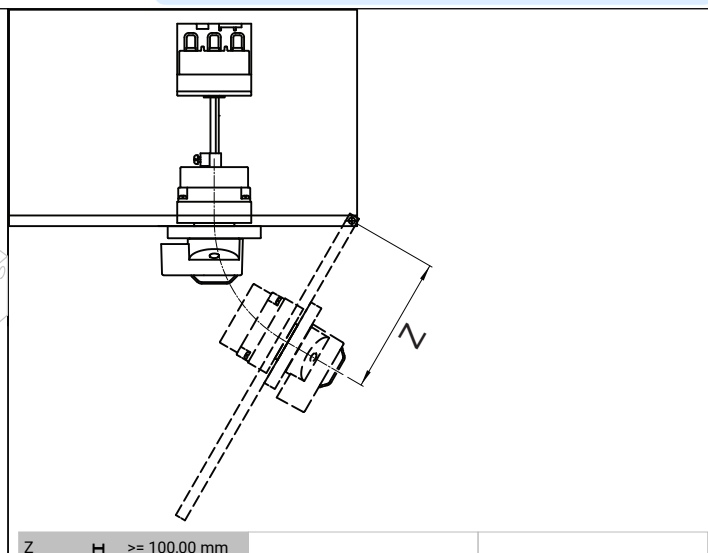

S2D V840 10

S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

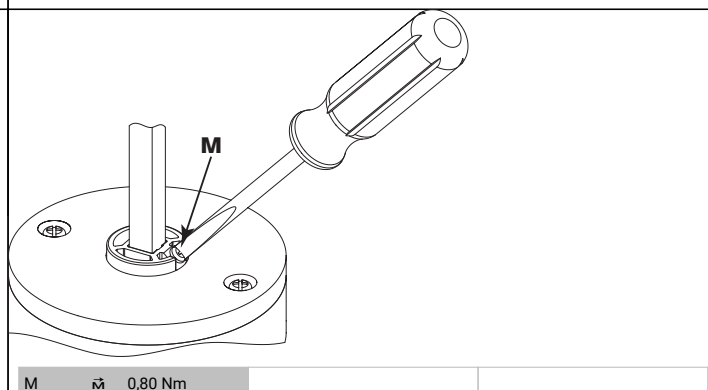

1. Loosen the screw
2. Move shaft
3. Tighten the screw



Sample image

GROUND TERMINAL (PE)

for KG- and KH-Switches

Designation: K2.H052/C

Switch type: "C" for KG80 - KG100C

UL60947-4-1 , UL508

Nominal Voltage

Spänning (V) AC / DC
600 AC

Märkdriftspänning Ui

Spänning (V) AC / DC
600 AC

Rated thermal current

Ström (A) Omgivningstemperatur (°C) Additional Text
100 0 - 40 -

GENERAL TECHNICAL INFORMATION

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.	1	35mm ²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm ²	Copper
flexible wire with sleeve	Max.	1	35mm ²	Copper

Stripping length

Length (mm) -



Rekomenderad skruvmejsel

Typ av skruvmejsel	Value
Stjärnskruvmejsel	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
3	27

Approbations

Specification


CSA C.22.2 No.14

General Information


Text

- Använd endast kopparkabel. Kabeln får inte förtennas.

Marking

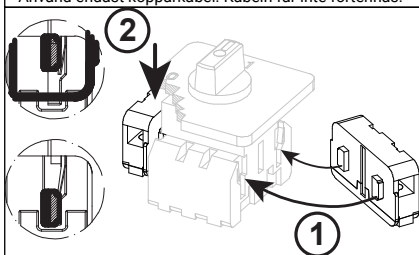

PE
PE

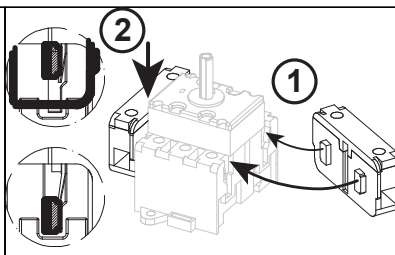

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K2.M510A/2CA-B

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE, VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Nominal Voltage			
		Spänning (V) AC / DC	
		690 AC	
Märkdraftström vid konstant drift			
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C)	ytterligare krav
16	55	60	Omgivningstemperatur +55°C under 24 timmar med toppar upp till +60°C
Märkdraftström Ie			
Urvals kriterie		Spänning (V)	Ström (A)
AC-15		110 - 240	6
AC-15		380 - 440	3
AC-15		500	1,50
AC-21A		20 - 690	16

UL60947-4-1, UL508

Nominal Voltage			
		Spänning (V) AC / DC	
		600 AC	
Märkdraftspänning Ui			
		Spänning (V) AC / DC	
		600 AC	
Rated thermal current			
Ström (A)		Omgivningstemperatur (°C) Additional Text	
10		0 - 40 --	
Pilot duty rating code			
Duty Code			
A600			
General Use			
AC / DC	Spänning (V)	Ström (A)	No. of phases
AC	600	10	1
			No. of poles
			1
			No. of contacts in series
			1

GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0,5mm ²	Copper
solid wire	Min.	2	0,5mm ²	Copper
flexible wire	Min.	1	0,75mm ²	Copper
flexible wire	Min.	2	0,75mm ²	Copper
flexible wire	Max.	2	2,5mm ²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0,5mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,5mm ²	Copper
Stripping length				
Length (mm) --				
				
Rekomenderad skruvmejsel				
Typ av skruvmejsel		Value		
Stjärnskruvmejsel		PH1		
Slot screwdriver according to DIN 5264		0,8x4		
Tightening torque of screws				
tightening torque (Nm)			tightening torque (lb-in)	
0.60				

General Information**Text**

- Smörjning och behandling av kontakterna är förbjuden.
- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast kopparkabel. Kabeln får inte förtennas.

13	21
14	22