

Sample image

Datasheet

Article number: 70018445

Designation: KG80.T304.E

Description: Switch Local Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
690 AC						
Märkdriftström vid konstant drift						
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav				
80	50	55 Omgivningstemperatur +50°C under 24 timmar med toppar upp till +55°C				
Märkdriftström Ie						
Urvals kriterie		Spänning (V)			Ström (A)	
AC-32A		20 - 400			80	
Märkdrifteffekt						
Urvals kriterie	Spänning (V)	No. of phases	No. of poles	Effekt (kW)		
AC-3	220 - 240	3	3	15		
AC-3	380 - 440	3	3	22		
AC-3	660 - 690	3	3	18,50		
AC-23A	220 - 240	3	3	18,50		
AC-23A	380 - 440	3	3	30		
AC-23A	660 - 690	3	3	22		
Max försäkring, IEC						
Säkringskaraktäristik			Antal säkringar		Ström (A)	
gG			1		80	
UL60947-4-1 , UL508						
Nominal Voltage						
Spänning (V) AC / DC						
600 AC						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
600 AC						
Rated thermal current						
Ström (A)		Omgivningstemperatur (°C)		Additional Text		
80		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	5	40
DOL		220 - 240	1	2	10	40
DOL		277 - 277	1	2	15	40
DOL		415 - 415	1	2	20	40
DOL		440 - 480	1	2	20	40
DOL		550 - 600	1	2	30	40
DOL		110 - 120	3	3	10	40
DOL		220 - 240	3	3	25	40
DOL		415 - 415	3	3	30	40
DOL		440 - 480	3	3	50	40
DOL		550 - 600	3	3	50	40
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.						
Temp. rating of wire						
Temperature rating (°C)		Ström (A) Text				
75		-- --				
Connecting instructions						
Markings						
Break all lines.						
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	80	1	1	1	
AC	600	80	1	2	1	
AC	600	80	3	3	1	

General Information
Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

- När brytaren används som säkerhetsbrytare skall den vara utrustad med vred som är låsbart i läge "0".

CSA
Nominal Voltage

Spänning (V) AC / DC
600 AC

Märkdriftspänning UI

Spänning (V) AC / DC
600 AC

Rated thermal current

Ström (A) Omgivningstemperatur (°C) Additional Text
80 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	10	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	20	40
DOL	440 - 480	1	2	20	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	30	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire

Temperature rating (°C) Ström (A) Text
75 -- --

General Use

AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	80	1	1	1
AC	600	80	1	2	1
AC	600	80	3	3	1

GENERAL TECHNICAL INFORMATION
Tightening torque of screws

tightening torque (Nm) tightening torque (lb-in)
3 27

Stripping length

Length (mm) -
14 STRIPPINGLENGTH

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	2,5mm²	Copper
flexible wire	Min.	1	4mm²	Copper
flexible wire	Max.	1	35mm²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm²	Copper
flexible wire with sleeve	Max.	1	35mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	2,5mm²	Copper

Approbations
Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

Rekomenderad skruvmejsel

Typ av skruvmejsel	Value
Stjärnskruvmejsel	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

General Information
Text

- EMC Note: This device is suitable for use in environment A and B.

- Smörjning och behandling av kontakterna är förbjuden.

Marking


General Information

Text

- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast kopparkabel. Kabeln får inte förtennas.
- Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-E

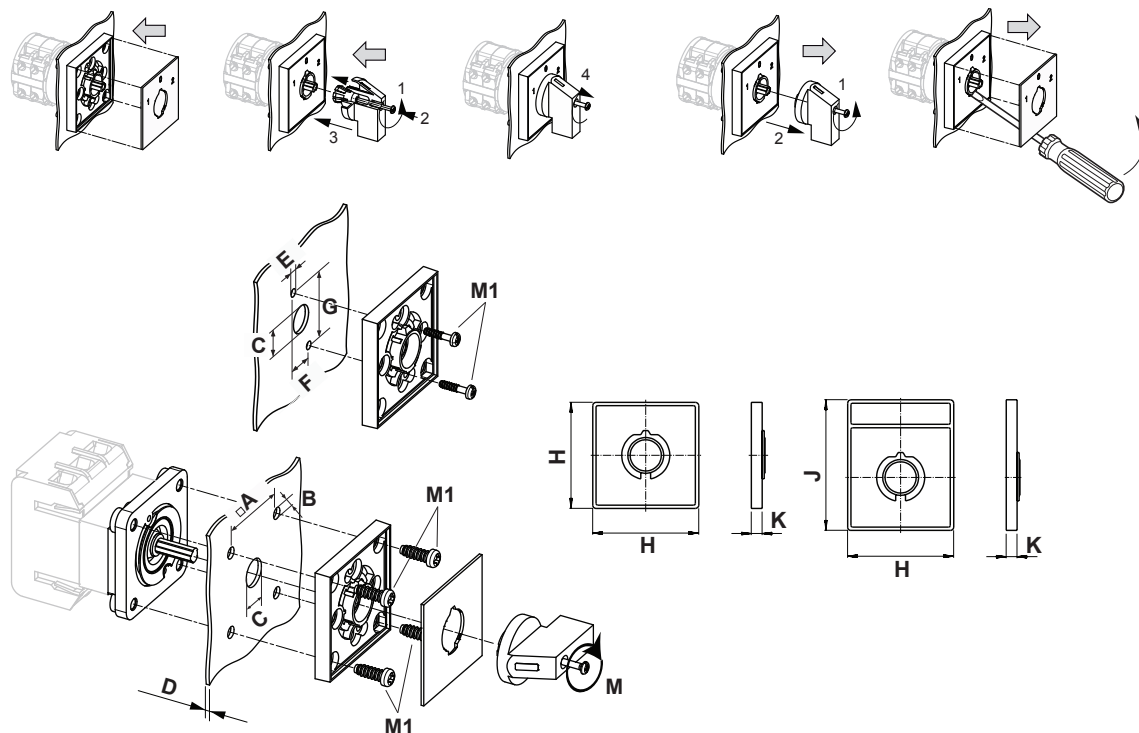


Skyddsklass frontpanel, IP		IP66, IP67
Stages		1,00 - 12,00
A	□	48,00 mm
B	∅	5,00 mm
C	∅	10,00 - 15,00 mm
D	H	<= 4,00 mm
E	∅	4,50 mm
F	H	14,00 mm
G	H	37,00 mm
H	H	64,00 mm
J	H	78,50 mm
K	H	7,40 mm
M	⌘	0,70 Nm
M1	⌘	0,90 Nm




Wiring diagram

KG80.T304.E

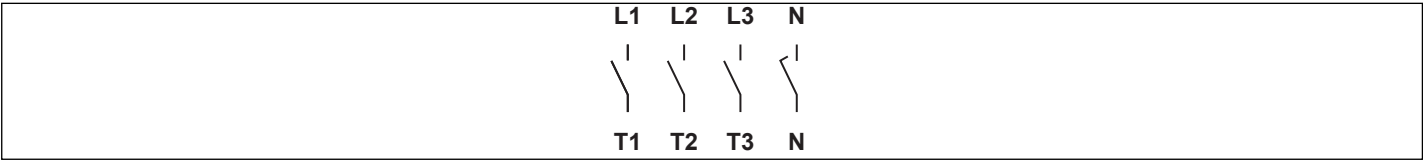

Switch program


KG80.T304.E

 Kraus & Naimer		KG80		T304		Page 1 of 1			
Face Plate									
		L1 1	L2 3	L3 5	N 7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2 T1	4 T2	6 T3	8 N	10	12	14	16
0	270								
1	0								
	90								
	180								

Version: 94

Face plate

S1.F456/A1B.PEL

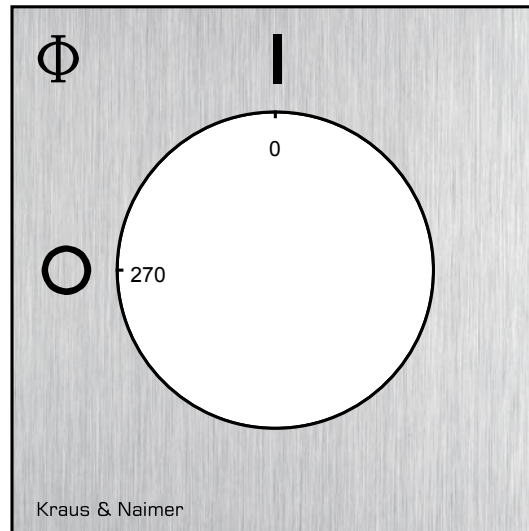

HANDLES

Designation: S1B.G251

Handle colour: "1" black

