

Sample image

Datasheet

Article number: 70023790

Designation: KG32A.T204/04.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
690 AC						
Märkdriftström vid konstant drift						
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C)	ytterligare krav			
32	50	55	Omginingstemperatur +50°C under 24 timmar med toppar upp till +55°C			
Märkdriftström Ie						
Urvals kriterie		Spänning (V)		Ström (A)		
AC-32A		20 - 400		32		
Märkdrifteffekt						
Urvals kriterie	Spänning (V)	No. of phases	No. of poles	Effekt (kW)		
AC-3	220 - 240	3	3	5,50		
AC-3	380 - 440	3	3	7,50		
AC-3	660 - 690	3	3	7,50		
AC-23A	220 - 240	3	3	5,50		
AC-23A	380 - 440	3	3	11		
AC-23A	660 - 690	3	3	11		
Max försäkring, IEC						
Säkringskaraktäristik			Antal säkringar	Ström (A)		
gG			1	35		
UL60947-4-1 , UL508						
Nominal Voltage						
Spänning (V) AC / DC						
600 AC						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
600 AC						
Rated thermal current						
Ström (A)		Omgivningstemperatur (°C) Additional Text				
30		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	1,50	40
DOL		200 - 208	1	2	3	40
DOL		220 - 240	1	2	5	40
DOL		277 - 277	1	2	5	40
DOL		415 - 415	1	2	5	40
DOL		440 - 480	1	2	7,50	40
DOL		550 - 600	1	2	7,50	40
DOL		110 - 120	3	3	3	40
DOL		200 - 240	3	3	10	40
DOL		415 - 415	3	3	10	40
DOL		440 - 480	3	3	20	40
DOL		550 - 600	3	3	25	40
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)		Ström (A) Text				
60 - 75		-- --				
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	30	1	1	1	
AC	600	30	1	2	1	
AC	600	30	3	3	1	

General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- När brytaren används som säkerhetsbrytare skall den vara utrustad med vred som är låsbart i läge "0".						
CSA						
Nominal Voltage						
			Spänning (V) AC / DC			
			600 AC			
Märkdriftspänning Ui						
			Spänning (V) AC / DC			
			600 AC			
Rated thermal current						
		Ström (A)	Omgivningstemperatur (°C)		Additional Text	
		30	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	1,50	40
DOL		220 - 240	1	2	5	40
DOL		277 - 277	1	2	5	40
DOL		415 - 415	1	2	5	40
DOL		440 - 480	1	2	7,50	40
DOL		550 - 600	1	2	7,50	40
DOL		110 - 120	3	3	3	40
DOL		220 - 240	3	3	10	40
DOL		415 - 415	3	3	10	40
DOL		440 - 480	3	3	20	40
DOL		550 - 600	3	3	25	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
			Temperature rating (°C)		Ström (A) Text	
			75		-- --	
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	30	1	1	1	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1,25		11	
Stripping length						
			Length (mm) --			
			9 STRIPPINGLENGTH			
Size of conductor						
composition of conductor		Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	
flexible wire		Max.	1		AWG 10	
flexible wire		Max.	1		4mm²	
Single-core or stranded wire		Max.	1		6mm²	
Single-core or stranded wire		Max.	1		AWG 10	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1		4mm²	
flexible wire with sleeve		Max.	1			

General Information

Text

- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast kopparkabel. Kabeln får inte förtennas.
- Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-E

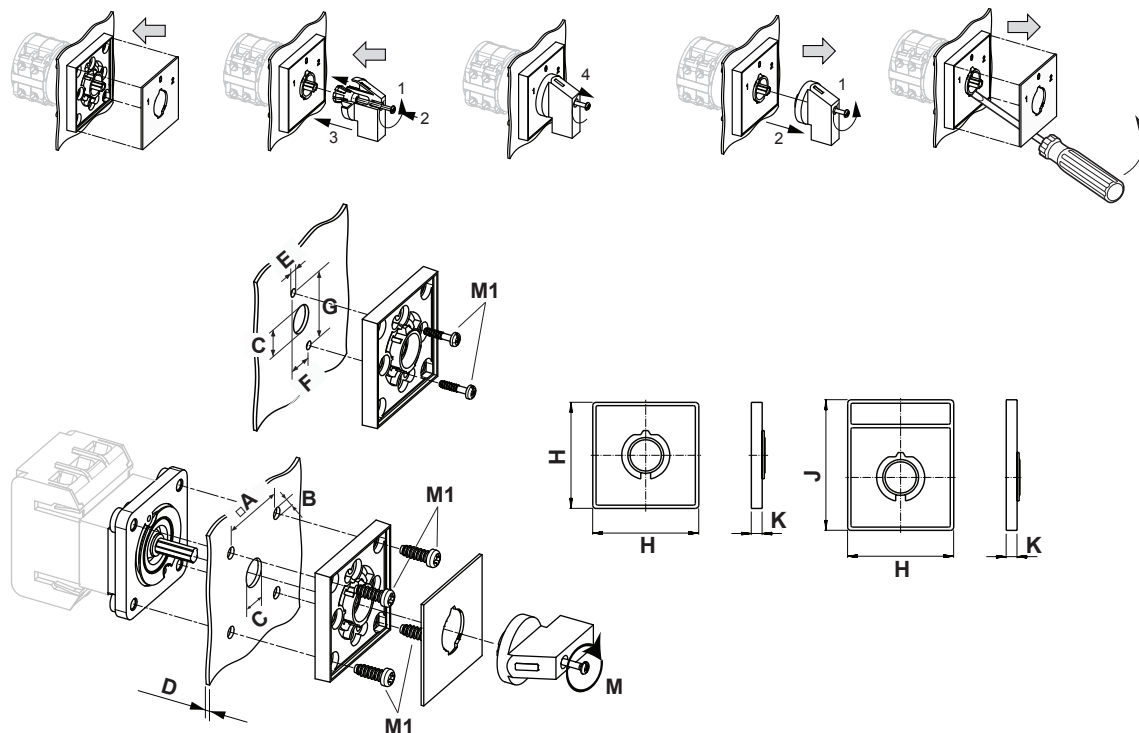


Skyddsklass frontpanel, IP		IP66, IP67
Stages		1,00 - 12,00
A	□	36,00 mm
B	∅	5,00 mm
C	∅	10,00 - 15,00 mm
D	H	<= 4,00 mm
E	∅	3,50 mm
F	H	12,20 mm
G	H	30,00 mm
H	H	48,00 mm
J	H	59,00 mm
K	H	6,30 mm
M	⌘	0,50 Nm
M1	⌘	0,90 Nm



Wiring diagram

KG32A.T304.E

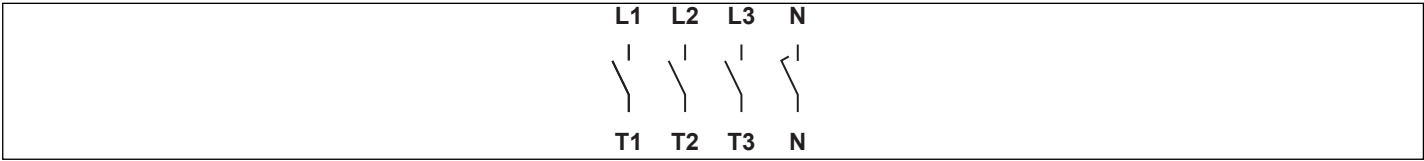


Switch program

KG32A.T304.E



Kraus & Naimer


KG32A
T304
Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
   									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

S0.F456/E10.E1LH

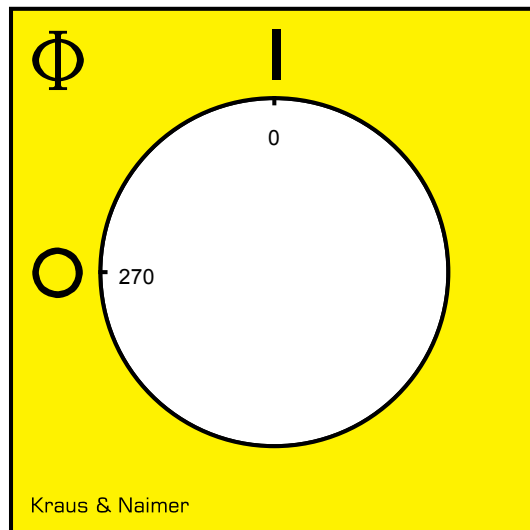

PADLOCK DEVICE

Designation: S0.V845/E11/A12

Face plate and handle unit: "E" face plate/yellow, frame/black, handle/red, locking push rod/yellow

Locking position: "1" at 09:00/03:00 - knockouts every 45°

Angular displacement: "1" 1 x 90°

Type of mounting: "A" for type of mounting E

Type of mounting: "A" for type of mounting GK

Type of version: "1" for same switch size

Switch type: "2" for KA-, KG- and KH(R)-switches

