

Sample image

Datasheet

Article number: 70025940

Designation: CH10.A231*NLB408.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Märkdraftspänning Ui					
Spänning (V) AC / DC					
690 AC / DC					
Märkdraftström vid konstant drift					
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav			
20	55	60 Omgivningstemperatur +55°C under 24 timmar med toppar upp till +60°C			
Märkdraftström Ie					
Urvals kriterie		Spänning (V)			Ström (A)
AC-15		220 - 240			6
AC-15		380 - 440			4
Märkdrafteffekt					
Urvals kriterie	Spänning (V)	No. of phases		No. of poles	Effekt (kW)
AC-3	220 - 240	3		3	3
AC-3	380 - 440	3		3	5,50
AC-3	660 - 690	3		3	5,50
AC-3	220 - 240	1		2	2,20
AC-3	380 - 440	1		2	3
AC-23A	220 - 240	3		3	3,70
AC-23A	380 - 440	3		3	7,50
AC-23A	660 - 690	3		3	7,50
AC-23A	220 - 240	1		2	2,50
AC-23A	380 - 440	1		2	3,70
Max försäkring, IEC					
Säkringskarakteristik				Antal säkringar	Ström (A)
gG				1	25
UL60947-4-1 , UL508					
Nominal Voltage					
Spänning (V) AC / DC					
600 AC					
Märkdraftspänning Ui					
Spänning (V) AC / DC					
600 AC					
Rated thermal current					
Ström (A)		Omgivningstemperatur (°C) Additional Text			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.					
Temp. rating of wire					
Temperature rating (°C)		Ström (A) Text			
60 - 75		-- Use copper wire only			
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	20	1	1	1
AC	600	20	1	2	1

General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	20	3	3	1	
CSA						
Nominal Voltage						
				Spänning (V)	AC / DC	
				600	AC	
Märkdriftspänning Ui						
				Spänning (V)	AC / DC	
				600	AC	
Rated thermal current						
		Ström (A)	Omgivningstemperatur (°C)		Additional Text	
		20	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Spänning (V)	No. of phases	No. of poles	Power (HP)
DOL			110 - 120	1	2	0,50
DOL			220 - 240	1	2	1
DOL			277 - 277	1	2	2
DOL			440 - 480	1	2	2
DOL			550 - 600	1	2	2
DOL			110 - 120	3	3	1,50
DOL			220 - 240	3	3	3
DOL			440 - 480	3	3	5
DOL			550 - 600	3	3	5
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
			Temperature rating (°C)	Ström (A) Text		
			75	-- --		
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	
AC	600	20	1	2	1	
AC	600	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)	tightening torque (lb-in)		
			1	9		
Stripping length						
			Length (mm)	--		
			9	STRIPPINGLENGTH		
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm ²) or (AWG/kcmil)	Material of the wire	
solid wire	Min.	1		0,75mm ²	Copper	
solid wire	Min.	2		0,75mm ²	Copper	
flexible wire	Min.	1		0,75mm ²	Copper	
flexible wire	Min.	2		0,75mm ²	Copper	
flexible wire	Max.	2		AWG 12	Copper	
flexible wire	Max.	2		2,5mm ²	Copper	
Single-core or stranded wire	Max.	2		AWG 10	Copper	
Single-core or stranded wire	Max.	2		4mm ²	Copper	
flexible wire with ferrule according to DIN 46228	Min.	1		0,75mm ²	Copper	
flexible wire with ferrule according to DIN 46228	Min.	2		0,75mm ²	Copper	
flexible wire with ferrule according to DIN 46228	Max.	2		2,5mm ²	Copper	
Approbations						
Specification				Marking		
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Rekomenderad skruvmejsel						
Typ av skruvmejsel			Value			
Stjärnskruvmejsel			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
General Information						
Text						
- Smörjning och behandling av kontakterna är förbjuden.						

General Information

Text

- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.
- Använd endast kopparkabel. Kabeln får inte förtennas.
- Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.
- Vid installation av strömställaren skall kontrolleras att kryp- och luftavstånd motsvarar gällande föreskrifter.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

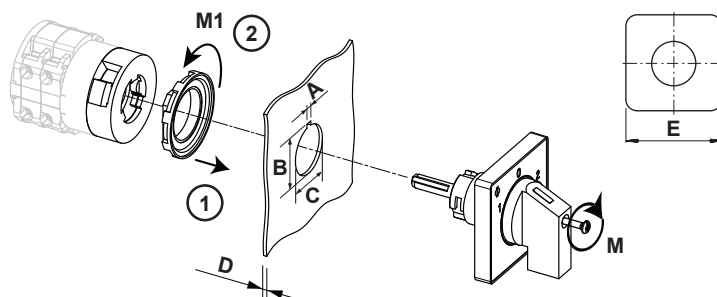

Skyddsklass frontpanel, IP IP66, IP67, IP69k

Stages 1,00 - 12,00

A H 3,20 mm

A+_tol. H 0,20 mm

A-_tol. H 0,00 mm

B H 24,10 mm

B+_tol. H 0,40 mm

B-_tol. H 0,00 mm

C Ø 22,30 mm

C+_tol. Ø 0,40 mm

C-_tol. Ø 0,00 mm

D H ≤ 6,00 mm


E □ 48,00 mm

M M̄ 0,50 Nm

M1 M̄ 1,80 Nm

Wiring diagram

CH10.A231.FT2





Switch program

CH10.A231.FT2



Kraus & Naimer


CH10
A231
Page 1 of 1


Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
Switching Angle 60 Total switching Angle 180		2	4	6	8	10	12	14	16	18	20	22	24
1		270	■										
		285											
		300											
		315											
2		330		■									
		345											
		0											
		15											
3		30			■								
		45											
		60											
		75											
4		90	■										
		105											
		120											
		135											
		150											
		165											
		180											
		195											
		210											
		225											
		240											
		255											

Version: 92

Face plate

S0.F077/A10.E1L

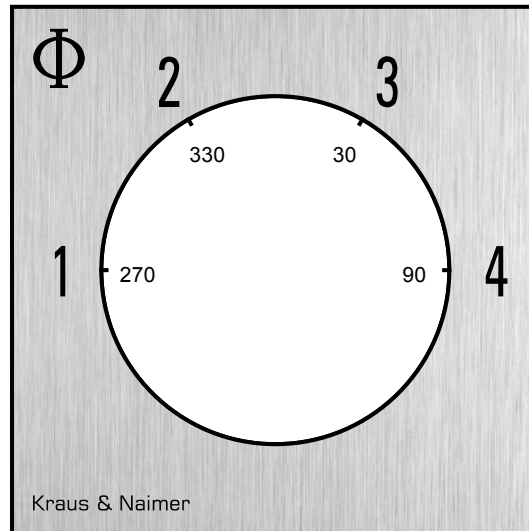



Sample image

KEY-LOCK DEVICE with small cylinder lock (Eurolock-Lock) for type of mounting FT, *FT1, *FT2, *FT6, *FH3, *FH4, *VE1F, *VE21

Designation: S0.V750D/3J/21

Lock cylinder: "3" lock cylinder S0 (KN 101)

Locking program: "J"

09:00+11:00+01:00+03:00+05:00+07:00

Type of mounting: "2" for type of mounting

*FT2/*FT2-V (22 mm)

Colour of face plate frame: "1" black (not for type
of mounting *VE21)

