



Sample image

Datasheet

Article number: 70025961

Designation: KG64B.T103/NLB522.E

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
690 AC						
Märkdriftström vid konstant drift						
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav				
63	50	55 Omginingstemperatur +50°C under 24 timmar med toppar upp till +55°C				
Märkdriftström Ie						
Urvals kriterie		Spänning (V)				Ström (A)
AC-32A		20 - 400				63
Märkdrifteffekt						
Urvals kriterie	Spänning (V)	No. of phases		No. of poles		Effekt (kW)
AC-3	220 - 240	3		3		11
AC-3	380 - 440	3		3		18,50
AC-3	660 - 690	3		3		15
AC-23A	220 - 240	3		3		11
AC-23A	380 - 440	3		3		22
AC-23A	660 - 690	3		3		18,50
Max försäkring, IEC						
Säkringskaraktistik				Antal säkringar		Ström (A)
gG				1		63
UL60947-4-1 , UL508						
Nominal Voltage						
Spänning (V) AC / DC						
600 AC						
Märkdriftspänning Ui						
Spänning (V) AC / DC						
600 AC						
Rated thermal current						
Ström (A)		Omgivningstemperatur (°C)		Additional Text		
60		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting		Spänning (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	3	40
DOL		220 - 240	1	2	7,50	40
DOL		277 - 277	1	2	7,50	40
DOL		415 - 415	1	2	10	40
DOL		440 - 480	1	2	15	40
DOL		550 - 600	1	2	15	40
DOL		110 - 120	3	3	5	40
DOL		220 - 240	3	3	15	40
DOL		415 - 415	3	3	20	40
DOL		440 - 480	3	3	30	40
DOL		550 - 600	3	3	40	40
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 70A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Ström (A) Text			
60 - 75			-- --			
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						

General Information						
Text						
- När brytaren används som säkerhetsbrytare skall den vara utrustad med vred som är låsbart i läge "0".						
CSA						
Nominal Voltage						
			Spänning (V) AC / DC			
			600 AC			
Märkdriftspänning Ui						
			Spänning (V) AC / DC			
			600 AC			
Rated thermal current						
		Ström (A)	Omgivningstemperatur (°C)		Additional Text	
		60	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Spänning (V)	No. of phases	No. of poles	Power (HP)
DOL			110 - 120	1	2	3
DOL			220 - 240	1	2	7,50
DOL			277 - 277	1	2	7,50
DOL			415 - 415	1	2	10
DOL			440 - 480	1	2	15
DOL			110 - 120	3	3	5
DOL			220 - 240	3	3	15
DOL			415 - 415	3	3	20
DOL			440 - 480	3	3	30
DOL			550 - 600	3	3	40
Temp. rating of wire						
			Temperature rating (°C)		Ström (A) Text	
			75		-- --	
General Use						
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			1,80		16	
Stripping length						
			Length (mm) --			
			12 STRIPPINGLENGTH			
Size of conductor						
composition of conductor		Min. / Max. value		No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)
flexible wire		Max.		1		AWG 6
flexible wire		Max.		1		10mm²
Single-core or stranded wire		Max.		1		AWG 6
Single-core or stranded wire		Max.		1		16mm²
flexible wire with sleeve		Max.		1		10mm²
Approbations						
Specification						
Marking						
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Rekomenderad skruvmejsel						
Typ av skruvmejsel			Value			
Stjärnskruvmejsel			PH2			
Slot screwdriver according to DIN 5264			1,2x6,5			
General Information						
Text						
- EMC Note: This device is suitable for use in environment A and B.						
- Smörjning och behandling av kontakterna är förbjuden.						
- Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri.						
- Använd endast kopparkabel. Kabeln får inte förtennas.						
- Alla anslutningsskruvar måste dras med rekommenderat moment, även de som inte används då det kan finnas interna överkopplingar.						
Waste Electrical & Electronic Equipment (WEEE)						
Picture name		Description				
		Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com				


Proposition 65
Picture name
Description


WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

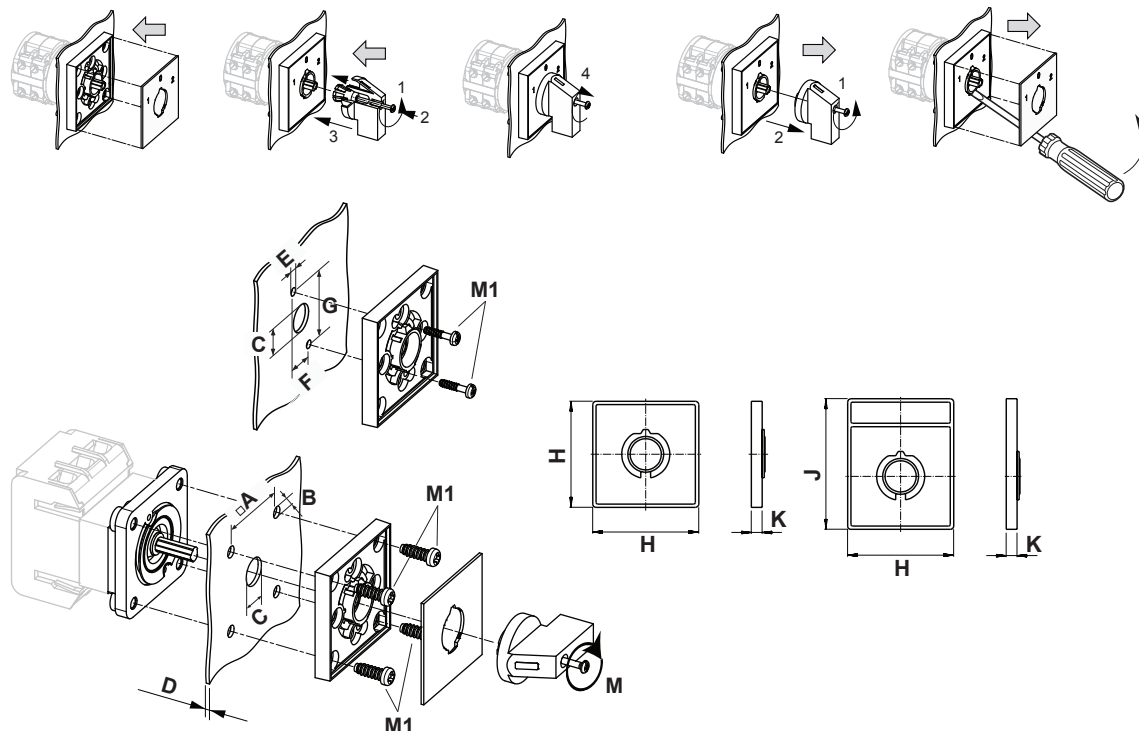
Mounting-E


Skyddsklass frontpanel, IP		IP66, IP67
Stages		1,00 - 12,00
A	□	48,00 mm
B	∅	5,00 mm
C	∅	10,00 - 15,00 mm
D	H	<= 4,00 mm
E	∅	3,50 mm
F	H	12,20 mm
G	H	30,00 mm
H	H	64,00 mm
J	H	78,50 mm
K	H	7,40 mm
M	↺	0,70 Nm
M1	↺	0,90 Nm



Wiring diagram

KG64B.T303.E

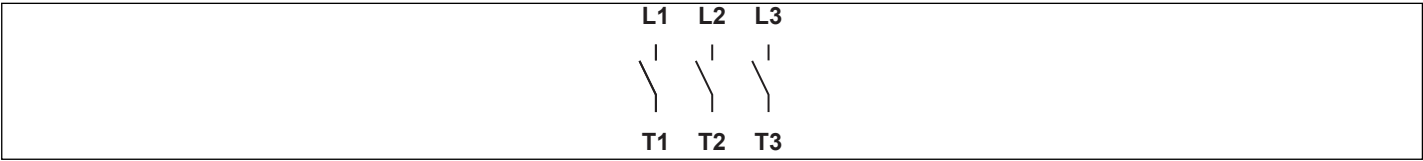


Switch program

KG64B.T303.E



Kraus & Naimer


KG64B
T303
Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0								
	90								
	180								

Version: 102

Face plate

S1.F456/C10.V11H

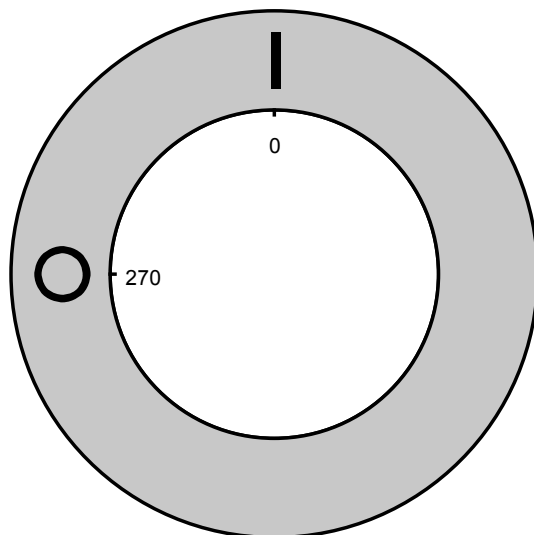



Sample image

PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/A71/A2

Colour of F-handle ring: "A" black


Colour of face ring: "7" electro-grey

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "A" for type of mounting E

Type of mounting: "A" for type of mounting GK (Rose)

Switch type: "2" for KA-, KG- and KH(R)-switches

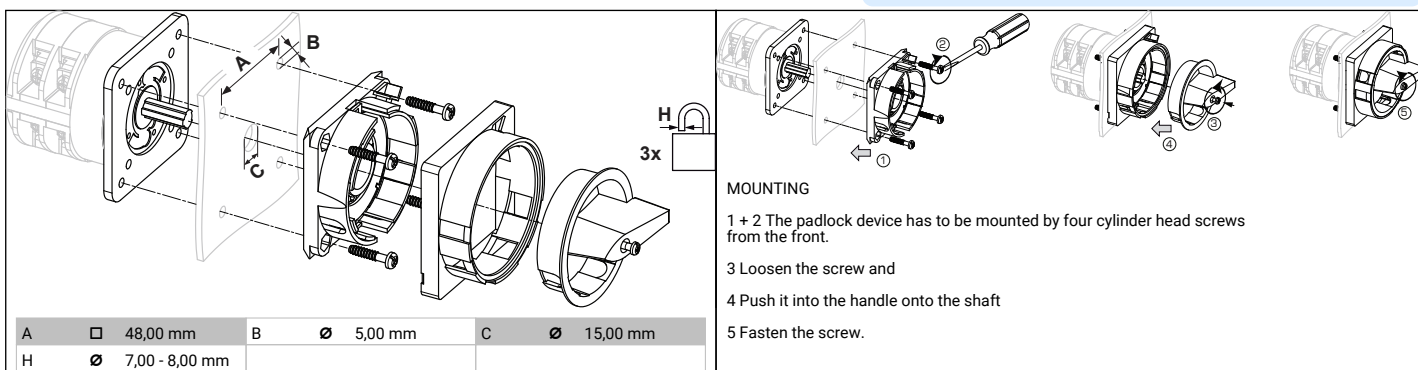


MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.

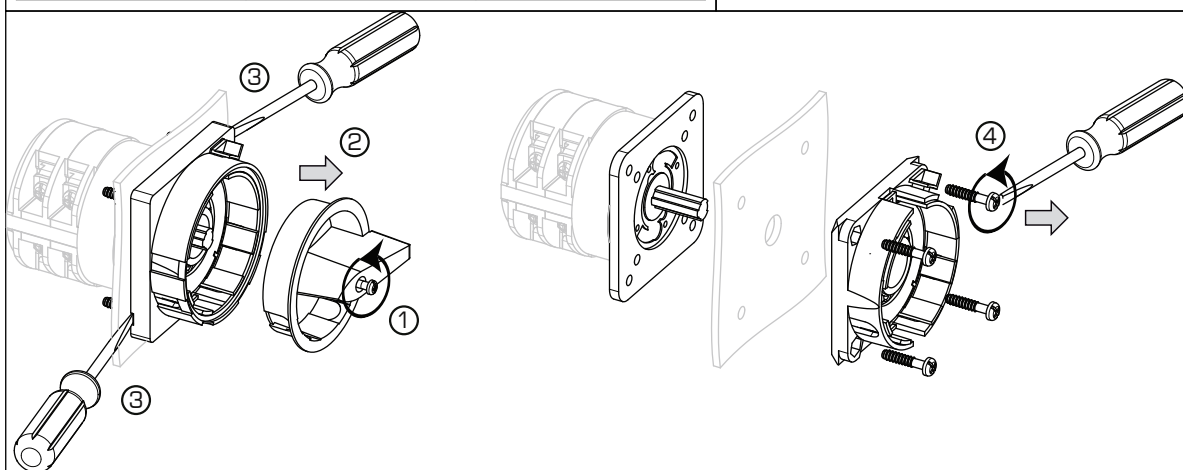

1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.

AUXILIARY CONTACTS (cam operated) for switch type KG20 - KG100C and KH(R)16 - KH(R)25B

Designation: K1.M510A/2CA-A

Number of contacts: "2" 2 auxiliary contacts

Operation of contacts: "C" 1 auxiliary contact closed in pos. 1 and 1 auxiliary contact closed in pos. 0 (NO/NC)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-A" for type of mounting E, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Nominal Voltage					
			Spänning (V) AC / DC		
			690 AC		
Märkdriftström vid konstant drift					
Ström (A)	Omgivningstemperatur (°C)	Temperatur topp (°C) ytterligare krav			
16	55	60 Omgivningstemperatur +55°C under 24 timmar med toppar upp till +60°C			
Märkdriftström Ie				Spänning (V)	Ström (A)
Urvals kriterie				110 - 240	6
AC-15				380 - 440	3
AC-15				500	1,50
AC-21A				20 - 690	16
UL60947-4-1 , UL508					
Nominal Voltage					
			Spänning (V) AC / DC		
			600 AC		
Märkdriftspänning Ui					
			Spänning (V) AC / DC		
			600 AC		
Rated thermal current					
Ström (A)		Omgivningstemperatur (°C)		Additional Text	
10		0 - 40		--	
Pilot duty rating code					
Duty Code					
A600					
General Use					
AC / DC	Spänning (V)	Ström (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	10	1	1	1
GENERAL TECHNICAL INFORMATION					
Tightening torque of screws					
			tightening torque (Nm)		tightening torque (lb-in)
			0,60		5
Stripping length					
			Length (mm) --		
			8 STRIPPINGLENGTH		
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1	0,5mm²		Copper
solid wire	Min.	2	0,5mm²		Copper
flexible wire	Min.	1	0,75mm²		Copper
flexible wire	Min.	2	0,75mm²		Copper
flexible wire	Max.	2	2,5mm²		Copper
flexible wire	Max.	2	AWG 14		Copper
Single-core or stranded wire	Max.	2	AWG 12		Copper
Single-core or stranded wire	Max.	2	2,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2,5mm²		Copper

Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
flexible wire with ferrule according to DIN 46228	Min.	1	0,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0,5mm²	Copper
Rekomenderad skruvmejsel				
Typ av skruvmejsel	Value			
Stjärnskruvmejsel	PH1			
Slot screwdriver according to DIN 5264	0,8x4			
General Information				
Text				
- Smörjning och behandling av kontakterna är förbjuden. - Inkoppling och service av strömställaren får endast utföras av behörig personal. Strömställaren är underhållsfri. - Använd endast kopparkabel. Kabeln får inte förtennas.				
1321  1422				