

Start Spot Aluminium IP44
START SPOT ALUMINIUM 760LM 840 IP44 BLK
0005182



- Product features**
- Integrated LED recessed spotlight, vertical tilt 30°, black bezel finish with black reflector, white replaceable reflector included in the packaging, 760lm (black reflector), 9W, dimmable trailing/leading edge, 4000K, 40° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, weight 0,165Kg, 85mm bezel diameter, 68-72mm cutout, clear lens.

PRODUCT OVERVIEW

Product name	START SPOT ALUMINIUM 760LM 840 IP44 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Residential & Consumer, Retail
E-number FI	4278422
Warranty	3 years
Fixture luminous flux (lm)	760
Luminaire efficacy (lm/W)	84
Colour temperature (K)	4000
Light colour	Candlelight
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	40
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9005 - Jet black
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288051826

DATA TABLE

General data	
Product name	START SPOT ALUMINIUM 760LM 840 IP44 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting

Start Spot Aluminium IP44

START SPOT ALUMINIUM 760LM 840 IP44 BLK

0005182

General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-10°C...+35°C
Performance ambient temperature T _a (°C)	25
E-number FI	4278422
Warranty	3 years

Optical data

Fixture luminous flux (lm)	760
Luminaire efficacy (lm/W)	84
Colour temperature (K)	4000
Light colour	Candlelight
Colour Variation Initial (SDCM)	SDCM6
Luminous Intensity (cd)	1400
Beam Angle (°)	40
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	9
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	40
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Minimum dimming level (%)	10
Drive current - Range (mA)	102mA / 202mA
Inrush Current (A)	10
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 13A C Breaker	65
Max. Luminaires per 16A B Breaker	30

Lifetime data

Lifespan L70 B50	47000
------------------	-------

Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP44/20
IK rating	IK03


Start Spot Aluminium IP44
START SPOT ALUMINIUM 760LM 840 IP44 BLK
0005182

Diffuser finish	Other
Diffuser material	None
Reflector finish	Matt
Nominal Product Diameter (mm)	86
Cutout Dimensions (W x L in mm or Diameter in mm)	68-72
Weight (kg)	0.14
Recessed Depth (mm)	100

Packaging	
Single packaging type	Carton
Product EAN number	5410288051826
Packaging single length / height (cm)	10.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	25410288051820
Units per inner package	6
Packaging inner length / height (cm)	28.5
Packaging inner width (cm)	9.0
Units per outer package	36
Packaging outer width (cm)	35.6
Packaging outer depth (cm)	29.3

Safety data	
Optimal operating condition (°C)	-10-35

PHOTOMETRY

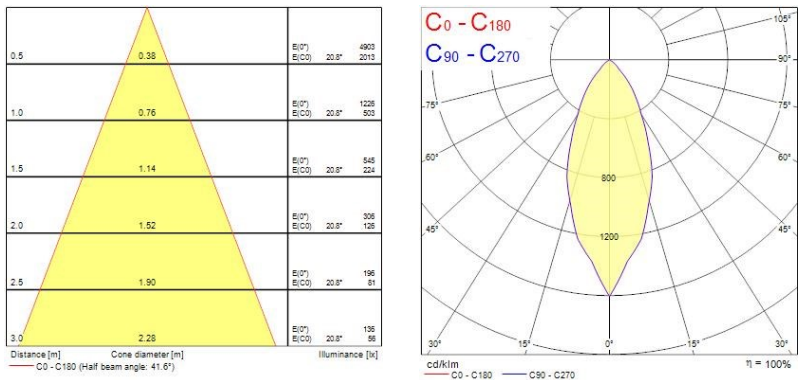

TECHNICAL DRAWINGS