

Start Track Spot Integral
START Track Spot Integral 1500lm 940 MB WB WHT
0005428



Product features

- Integrated LED spotlight, Textured White - RAL9016, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lens 64° beam angle included, color temperature: 4000k , total system power: 17W, total fixture output: 1500 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 410mA, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Global Track 3 Circuit GA69 adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø60x117x248, weight: 0.486kg.

PRODUCT OVERVIEW

Product name	START Track Spot Integral 1500lm 940 MB WB WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Retail
E-number FI	4276971
Warranty	5 years
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288054285

DATA TABLE

General data	
Product name	START Track Spot Integral 1500lm 940 MB WB WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Retail
Operating temperature range (°C)	-20°C...+40°C

Start Track Spot Integral

START Track Spot Integral 1500lm 940 MB WB WHT

0005428

Performance ambient temperature Tq (°C)	25
E-number FI	4276971
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	17
Current (A)	0.077
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Dimmable	No
Inrush Current (A)	7.4
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	64
Max. Luminaires per 13A C Breaker	84
Max. Luminaires per 10A B Breaker	38
Max. Luminaires per 16A B Breaker	62
Max. Luminaires per 20A B Breaker	77

Lifetime data

Lifespan L70 B50	50000
Lifespan L80 B50	48100
Lifespan L80 B20	41000
Lifespan L80 B10	37700
Lifespan L90 B50	19500
Lifespan L90 B20	17000
Lifespan L90 B10	15900

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	248

Start Track Spot Integral

START Track Spot Integral 1500lm 940 MB WB WHT
0005428

Nominal Product Width (mm)	117
Weight (kg)	0.486


Packaging

Single packaging type	Carton
Product EAN number	5410288054285
Packaging single length / height (cm)	8.5
Packaging single width (cm)	8.5
Packaging single depth (cm)	25.5
Units per outer package	12
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	27.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

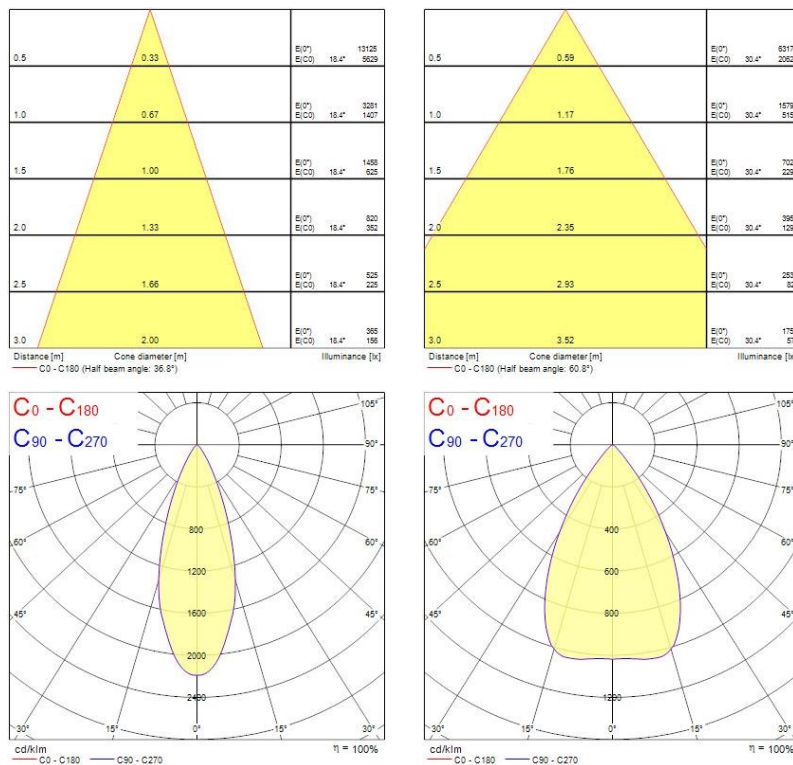

TECHNICAL DRAWINGS