

Resisto DALI
Resisto 1500 IP66 DALI 8500lm 840
0010261



- Product features**
- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 8500lm; 61W; 139lm/W; 4000K; SDCM<5; DALI dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.

PRODUCT OVERVIEW

Product name	Resisto 1500 IP66 DALI 8500lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357069
Warranty	5 years
Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	139
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	61
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102610

DATA TABLE

General data	
Product name	Resisto 1500 IP66 DALI 8500lm 840
Technology	LED
Cap/Base	N/A

Resisto DALI

Resisto 1500 IP66 DALI 8500lm 840

0010261

Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4357069
Warranty	5 years

Optical data

Fixture luminous flux (lm)	8500
Luminaire efficacy (lm/W)	139
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	61
Mains voltage (V)	220-240V
Lamp power factor	0.99
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	9
Electrical protection	Class I
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	350
Inrush Current (A)	23.1
Inrush Duration (µs)	174
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	35
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	21

Resisto DALI

Resisto 1500 IP66 DALI 8500lm 840

0010261

Max. Luminaires per 20A B Breaker	27
-----------------------------------	----

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	2.01


Packaging

Single packaging type	Carton
Product EAN number	5410288102610
Packaging single length / height (cm)	150.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (outer)	05410288102610
Units per outer package	1
Packaging outer length / height (cm)	150.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

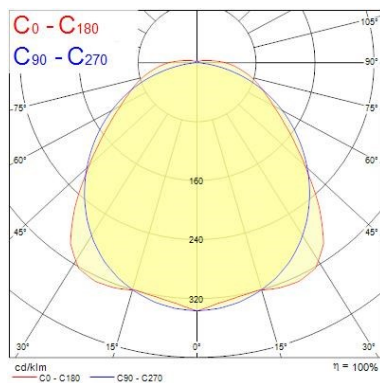

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	1.37	53.8°	11448	
	1.24	51.1°	1421	
1.0	2.73	53.8°	286	
	2.48	51.1°	355	
1.5	4.10	53.8°	127	
	3.72	51.1°	155	
2.0	5.47	53.8°	71	
	4.96	51.1°	89	
2.5	6.83	53.8°	45	
	6.20	51.1°	57	
3.0	8.20	53.8°	31	
	7.44	51.1°	39	

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 102.2°)
— C90 - C270 (Half beam angle: 107.6°)



Resisto DALI

Resisto 1500 IP66 DALI 8500lm 840

0010261

TECHNICAL DRAWINGS
