

RefLED Superia Retro MR16 DIMMABLE

RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL
0029220



Product features

- Premium performance professional LED MR16 range with the same look and feel of traditional halogen MR16 lamp
- Recreates backlight effect similar to halogen dichroic lamps.
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- Switching cycles: >100,000
- Colour rendering: CRI80
- Lamp voltage: 12V AC/DC
- Dimmable on approved dimmers
- Works with magnetic and compatible electronic transformers
- Warranty: 5 Years



PRODUCT OVERVIEW

Product name	RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL
Technology	LED
Watt (Rated) (W)	5.8
Type	LED exchangeable
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
E-number FI	4741100
Warranty	5 years
Colour temperature (K)	4000
Light colour	Cool White
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Product Voltage (V)	12
Dimmable	Yes
Average life (Nominal) (h)	25000
Product EAN number	5410288292205

DATA TABLE

General data

Product name	RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL
Technology	LED
Watt (Rated) (W)	5.8
Type	LED exchangeable
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
Operating temperature range (°C)	-20°C...+40°C

RefLED Superia Retro MR16 DIMMABLE

RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL

0029220

Performance ambient temperature Tq (°C)	25
E-number FI	4741100
Warranty	5 years

Optical data

Colour temperature (K)	4000
Light colour	Cool White
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	1100
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Equivalent watt (W)	40
Product Voltage (V)	12
Control gear required	No
Transformer required	Yes
Dimmable	Yes
Inrush Current (A)	7.5
Lamp Energy Label (class)	F

Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

Physical data

Nominal Product Length (mm)	44
Nominal Product Diameter (mm)	50
Weight (kg)	0.03

Packaging


Single packaging type	Carton
Product EAN number	5410288292205
Packaging single length / height (cm)	6.1
Packaging single width (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	25410288292209
Units per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	13.2
Units per outer package	48
Packaging outer width (cm)	28.2
Packaging outer depth (cm)	20.8

RefLED Superia Retro MR16 DIMMABLE
RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL
0029220


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Safety message	Suitable for approved transf./dimmers

PHOTOMETRY

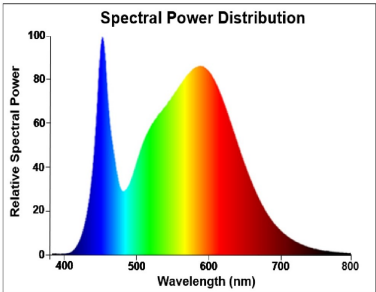

TECHNICAL DRAWINGS



RefLED Superia Retro MR16 DIMMABLE
RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL
0029220

**ENERG**

SYLVANIA

0029220



6
kWh/1000h




2019/2015

RefLED Superia Retro MR16 DIMMABLE
RefLED Superia Retro MR16 V2 480LM DIM 840 36 SL
0029220



0029220

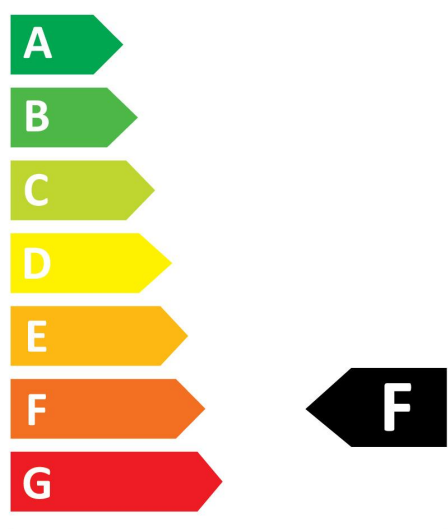

6
kWh/1000h

