

RefLED Retro MR11

RefLED Retro MR11 184LM 830 36° SL 0029238



Product features

- LED MR11 range with the same look and feel of traditional halogen MR11 lamp
- Full glass design means no colours clashing between the lamp and fixture
- Available in 36 degree beam angle
- 15,000 hours average rated life
- Switching cycles: 50,000
- Colour rendering: CRI80
- Lamp voltage: 12V AC/DC
- Works with magnetic and compatible electronic transformers*
- Warranty: 3 Years









PRODUCT OVERVIEW

I TODOOT OVERTVIEW	
Product name	RefLED Retro MR11 184LM 830 36° SL
Technology	LED
Watt (Rated) (W)	2.5
Туре	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
E-number FI	4741116
Warranty	3 years
Colour temperature (K)	3000
Light colour	Warm White
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Product Voltage (V)	12
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288292380

DATA TABLE

General data	
Product name	RefLED Retro MR11 184LM 830 36° SL
Technology	LED
Watt (Rated) (W)	2.5
Туре	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C+40°C
Performance ambient temperature Tq (°C)	25



RefLED Retro MR11

RefLED Retro MR11 184LM 830 36° SL 0029238

E-number FI	4741116
Warranty	3 years
Optical data	
Colour temperature (K)	3000
ight colour	Warm White
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
_uminous Intensity (cd)	400
Beam Angle (°)	36
Photobiological Risk Group	RG1
umen maintenance at end of nominal ife (%)	70
Electrical data	
Equivalent watt (W)	20
Product Voltage (V)	12
Control gear required	No
Fransformer required	Yes
Dimmable .	No
nrush Current (A)	8
_amp Energy Label (class)	G
Max. Luminaires per 16A B Breaker	20
ifetime data	
ifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000
Physical data	
Physical data	
Nominal Product Length (mm)	38
Nominal Product Diameter (mm)	35
Weight (kg)	0.014
Packaging	
Single packaging type	Carton
Product EAN number	5410288292380
Packaging single length / height (cm)	5.1
Packaging single width (cm)	4.5
Packaging single depth (cm)	7.6
OUN14 (inner)	25410288292384
Jnits per inner package	6
Packaging inner length / height (cm)	16.4
Packaging inner width (cm)	10.3
	36
Jnits per outer package Packaging outer width (cm)	36 18.7




RefLED Retro MR11 RefLED Retro MR11 184LM 830 36° SL 0029238


Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Safety message	Suitable for approved transf./dimmers

PHOTOMETRY




TECHNICAL DRAWINGS

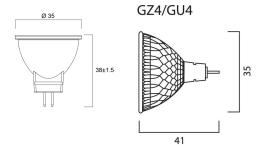



RefLED Retro MR11


RefLED Retro MR11 184LM 830 36° SL
0029238

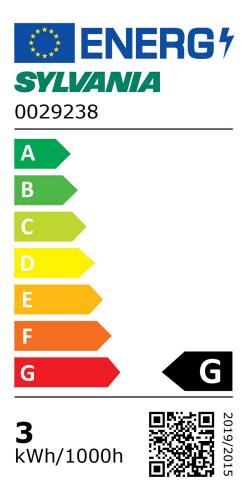



RefLED Retro MR11

RefLED Retro MR11 184LM 830 36° SL
0029238



-

G



3 kWh/1000h

