

## RefLED Retro Superia ES50 DIMMABLE

RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5 0029129



#### **Product features**

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp
- Recreates backlight effect similar to halogen dichroic lamps
- Full glass design means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- COOLFIT functionality ensures overheat and over temperature protection
- High switching cycles: >100,000
- High colour rendering: CRI80
- Dimmable with approved dimmers
- Warranty: 5 Years



## PRODUCT OVERVIEW

Product name	RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5
Technology	LED
Watt (Rated) (W)	4.5
Туре	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Warranty	5 years
Colour temperature (K)	4000
Light colour	Cool White
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Product Voltage (V)	230
Dimmable	Yes
Average life (Nominal) (h)	25000
Product EAN number	5410288291291

#### **DATA TABLE**

General data	
Product name	RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5
Technology	LED
Watt (Rated) (W)	4.5
Туре	LED exchangeable
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C+50°C
Performance ambient temperature Tq (°C)	25



## RefLED Retro Superia ES50 DIMMABLE RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5


0029129

Warranty	5 years
Optical data	
Colour temperature (K)	4000
Light colour	Cool White
_	6
Colour Consistency (SDCM)	
Colour Variation Initial (SDCM)	SDCM6
Luminous Intensity (cd)	750
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70
Electrical data	
Equivalent watt (W)	50
Product Voltage (V)	230
Control gear required	No
Transformer required	No
Dimmable	Yes
Inrush Current (A)	0.55
Lamp Energy Label (class)	F
Max. Luminaires per 16A B Breaker	762
Lifetime data	
Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000
Physical data	
Nominal Product Diameter (mm)	50
Weight (kg)	0.25
Packaging	
Single packaging type	Carton
Product EAN number	5410288291291
Packaging single length / height (cm)	8.2
Packaging single width (cm)	19.5
Packaging single depth (cm)	5.1
Units per outer package	6
Packaging outer width (cm)	20.2
Packaging outer depth (cm)	32.3
Safety data	
Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Safety message	Dimmable with approved dimmers




## RefLED Retro Superia ES50 DIMMABLE RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5 0029129

## **PHOTOMETRY**




## **TECHNICAL DRAWINGS**





# RefLED Retro Superia ES50 DIMMABLE RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5 0029129

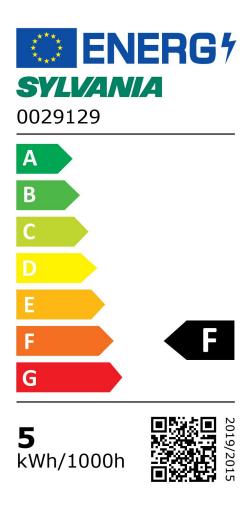



## RefLED Retro Superia ES50 DIMMABLE RefLED Superia Retro ES50 V3 360LM DIM 840 36 SL5 0029129

