

INSAVER SLIM 175 PIR / WIDE BEZEL


Insaver Slim UGR19 175 IP44 PIR 1075lm 840

0030321



Product features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 9W; 1075lm; 119lm/W; 4000K; UGR <19 with shallow product depth 50mm. Meets TP(a) requirements.

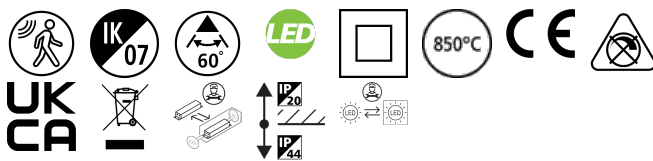

PRODUCT OVERVIEW

Product name	Insaver Slim UGR19 175 IP44 PIR 1075lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
E-number FI	4276932
Warranty	5 years
Fixture luminous flux (lm)	1075
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303215

DATA TABLE

General data

Product name	Insaver Slim UGR19 175 IP44 PIR 1075lm 840
--------------	--

INSAVER SLIM 175 PIR / WIDE BEZEL

Insaver Slim UGR19 175 IP44 PIR 1075lm 840

0030321

Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4276932
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1075
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	9
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20.0
Electrical protection	Class II
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	No
Drive current (mA)	290
Inrush Current (A)	7.48
Inrush Duration (µs)	160
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	56
Max. Luminaires per 13A C Breaker	70
Max. Luminaires per 16A C Breaker	88
Max. Luminaires per 20A C Breaker	110
Max. Luminaires per 10A B Breaker	33
Max. Luminaires per 13A B Breaker	42
Max. Luminaires per 16A B Breaker	52

INSAVER SLIM 175 PIR / WIDE BEZEL

Insaver Slim UGR19 175 IP44 PIR 1075lm 840

0030321

Max. Luminaires per 20A B Breaker	66
-----------------------------------	----

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B20	90000
Lifespan L90 B10	39000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Reflector finish	Silver
Nominal Product Height (mm)	50
Nominal Product Diameter (mm)	195
Cutout Dimensions (W x L in mm or Diameter in mm)	175
Weight (kg)	0.913
Recessed Depth (mm)	150

Packaging



Single packaging type	Carton
Product EAN number	5410288303215
Packaging single length / height (cm)	25.5
Packaging single width (cm)	25.5
Packaging single depth (cm)	8.5
DUN14 (outer)	15410288303212
Units per outer package	12
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	52.5
Packaging outer depth (cm)	27.5

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

INSAVER SLIM 175 PIR / WIDE BEZEL
Insaver Slim UGR19 175 IP44 PIR 1075lm 840
0030321

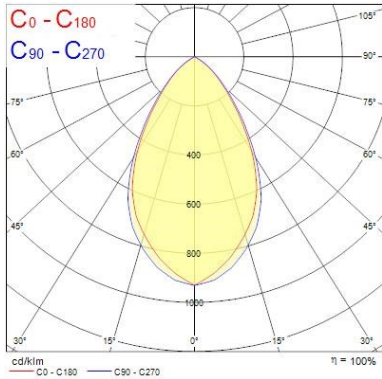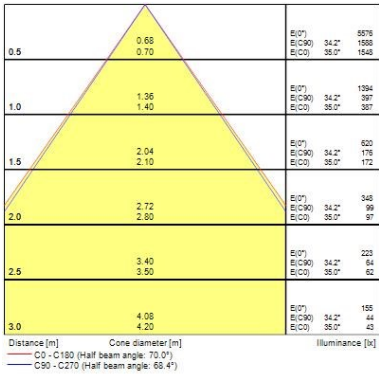

TECHNICAL DRAWINGS

