


START DOWNLIGHT IP44 150
START Downlight 150 IP44 1100lm 830
0030324



Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 45mm product depth and 150mm cutout. Ideal replacement for 1x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1100LM, 12W, 92lm/W, 3000K, Driver Current: 290mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 45x165mm, Class 2, 220-240V. Meets TP(a) requirements.

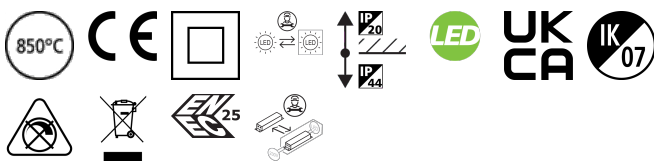

PRODUCT OVERVIEW

Product name	START Downlight 150 IP44 1100lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
E-number FI	4278145
Warranty	5 years
Fixture luminous flux (lm)	1100
Luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303246

DATA TABLE

START DOWNLIGHT IP44 150

START Downlight 150 IP44 1100lm 830

0030324

General data

Product name	START Downlight 150 IP44 1100lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature T _a (°C)	40
E-number FI	4278145
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1100
Luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	12
Mains voltage (V)	220-240V
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Transformer required	No
Dimmable	No
Dimming method	N/A
Inrush Current (A)	7.48
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	56
Max. Luminaires per 13A C Breaker	70
Max. Luminaires per 10A B Breaker	33
Max. Luminaires per 16A B Breaker	52
Max. Luminaires per 20A B Breaker	66

START DOWNLIGHT IP44 150

START Downlight 150 IP44 1100lm 830

0030324

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Diameter (mm)	165
Cutout Dimensions (W x L in mm or Diameter in mm)	150
Weight (kg)	0.286
Recessed Depth (mm)	150


Packaging

Single packaging type	Carton
Product EAN number	5410288303246
Packaging single length / height (cm)	19.7
Packaging single width (cm)	17.9
Packaging single depth (cm)	7.1
Units per outer package	20
Packaging outer width (cm)	37.6
Packaging outer depth (cm)	38.2

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

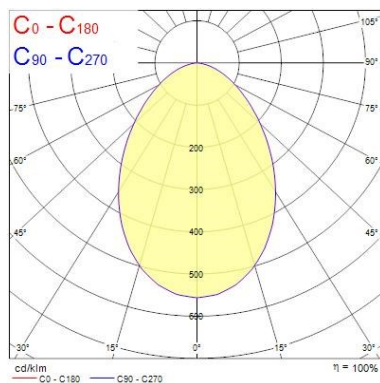

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.51	77.8°	2461
1.0	1.01	77.8°	615
1.5	1.51	77.8°	273
2.0	2.01	77.8°	154
2.5	2.51	77.8°	98
3.0	3.01	77.8°	65

START DOWNLIGHT IP44 150

START Downlight 150 IP44 1100lm 830
0030324

TECHNICAL DRAWINGS

