

SylSafe Spot
SylSafe XSpot OA R EM3 NM MS
0041775



Product features

- SylSafe XSpot OA R EM3 NM MS is a miniature emergency recessed spotlight with small form factor - cut-out diameter: 10mm. Non-maintained 3 hr emergency duration with NiMH rechargeable battery. Recharge period 24 hours. Quick and easy installation with driver module and battery pack contained in articulated case that can placed near the luminaire. Suitable for sheet metal installation. 80lm, 2.8W, IK03, IP20. Power Factor 0.45. Class II electrical construction.



PRODUCT OVERVIEW

Product name	SylSafe XSpot OA R EM3 NM MS
Technology	LED
Type	LED
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Education, Museums & Galleries
Warranty	5 years
Fixture luminous flux (lm)	80
Luminaire efficacy (lm/W)	29
Colour temperature (K)	5700
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	80
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288417752

DATA TABLE

General data

Product name	SylSafe XSpot OA R EM3 NM MS
Technology	LED
Type	LED
Mount	Ceiling recessed mounting
General application	Office, Hospitality, Retail, Education, Museums & Galleries
Warranty	5 years

Optical data

Fixture luminous flux (lm)	80
Luminaire efficacy (lm/W)	29
Colour temperature (K)	5700
Photobiological Risk Group	RG2
Luminous flux (emergency) (lm)	80
Emergency duration (h)	3

SylSafe Spot
SylSafe XSpot OA R EM3 NM MS
0041775

Electrical data

Mains voltage (V)	230-240V
Lamp power factor	0.45
Electrical protection	Class II
Control gear required	Yes
Nominal Frequency (Hz)	50/60Hz


Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	12
Nominal Product Width (mm)	12
Weight (kg)	0.32

Packaging

Single packaging type	Carton
Product EAN number	5410288417752
Packaging single length / height (cm)	21.0
Packaging single width (cm)	9.3
Packaging single depth (cm)	4.7
Units per outer package	25
Packaging outer width (cm)	29.8
Packaging outer depth (cm)	28.0

PHOTOMETRY

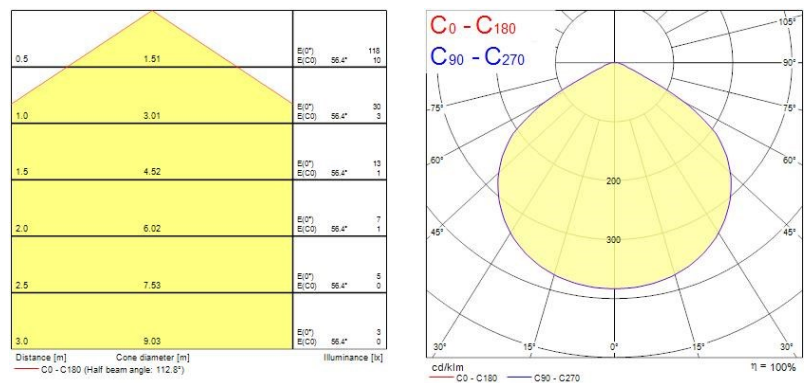

TECHNICAL DRAWINGS

SylSafe Spot

SylSafe XSpot OA R EM3 NM MS

0041775

