


RANA NEO Surface 1200 SylSmart
RANA NEO 6800LM S 1200 830 SSA02 2L WHITE
0044943



Product features

- Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x56mm, White body colour, IP20, IK07, SylSmart Connected capable, Low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 6800lm, 58W, 117lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

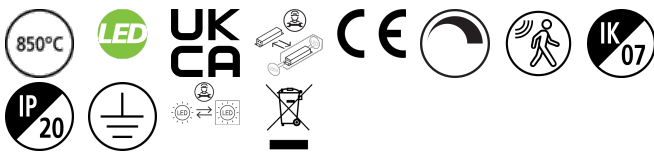

PRODUCT OVERVIEW

Product name	RANA NEO 6800LM S 1200 830 SSA02 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Education, Office
Warranty	5 years
Fixture luminous flux (lm)	6800
Luminous flux (lm)	6800
Luminaire efficacy (lm/W)	117
Colour temperature (K)	3000
Light colour	Warm White
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0
Total power consumption (W)	58
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Dimming method	SylSmart SSA
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288449432

DATA TABLE

General data	
Product name	RANA NEO 6800LM S 1200 830 SSA02 2L WHITE
Technology	LED (3 SDCM)
Cap/Base	N/A

RANA NEO Surface 1200 SylSmart

RANA NEO 6800LM S 1200 830 SSA02 2L WHITE
0044943

Housing	Steel
Mount	Ceiling surface mounting, Suspended
General application	Education, Office
Operating temperature range (°C)	-5°C...+25°C
Performance ambient temperature T _a (°C)	25
Warranty	5 years

Optical data

Fixture luminous flux (lm)	6800
Luminous flux (lm)	6800
Luminaire efficacy (lm/W)	117
Colour temperature (K)	3000
Light colour	Warm White
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 18
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	58
Mains voltage (V)	220-240V
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	Other
Dimmable	Yes
Dimming method	SylSmart SSA
Inrush Current (A)	27
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 13A C Breaker	32
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 16A B Breaker	24
Max. Luminaires per 20A B Breaker	30

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	96000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1160

RANA NEO Surface 1200 SylSmart
RANA NEO 6800LM S 1200 830 SSA02 2L WHITE
0044943

Nominal Product Width (mm)	187
Weight (kg)	3.2


Packaging

Single packaging type	Carton
Product EAN number	5410288449432
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
Units per outer package	1
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

Safety data

Optimal operating condition (°C)	-5-25
----------------------------------	-------

PHOTOMETRY

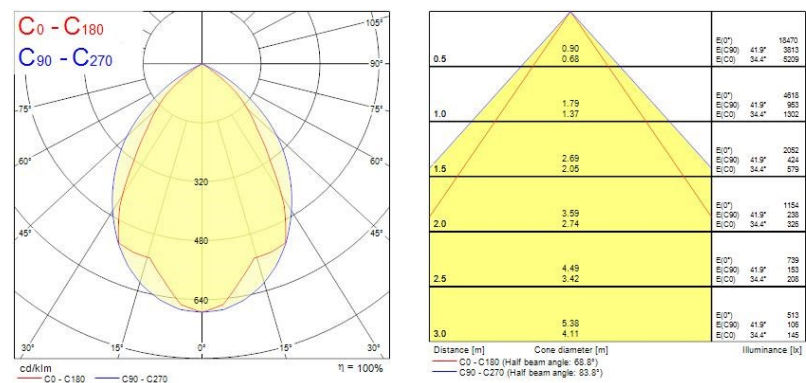

TECHNICAL DRAWINGS

