

Start Surface Wall Round

START Surface Wall Round IP54 500lm Direct 2CCT

0047134



Product features

- Round shaped exterior surface wall light with integrated LED, RAL9005 - Black Aluminium housing, light emission on one side, 500/480 lm, 6.7 W, 75/72 lm/W, 3000 or 4000K adjustable CCT, non dimmable, CRI>80, 220-240V, Class I, lifespan L70:B50: 90000 hrs IP54, IK07, 76 x 129 x 110mm (W x H x D). Weight: 0.55 kg.



PRODUCT OVERVIEW

Product name	START Surface Wall Round IP54 500lm Direct 2CCT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall recessed, Wall surface mounted
General application	Residential & Consumer
E-number FI	4579601
Warranty	5 years
Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	75
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	6.7
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Product EAN number	5410288471341

DATA TABLE

General data

Product name	START Surface Wall Round IP54 500lm Direct 2CCT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall recessed, Wall surface mounted
General application	Residential & Consumer

Start Surface Wall Round

START Surface Wall Round IP54 500lm Direct 2CCT

0047134

Operating temperature range (°C)	-20°C...+40°C
E-number FI	4579601
Warranty	5 years

Optical data

Fixture luminous flux (lm)	500
Luminaire efficacy (lm/W)	75
Light colour	Neutral White
Colour Variation Initial (SDCM)	SDCM3
Luminous Intensity (cd)	803
Beam Angle (°)	40
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	6.7
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	46
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	70
Max. Luminaires per 13A C Breaker	86
Max. Luminaires per 10A B Breaker	56
Max. Luminaires per 16A B Breaker	82
Max. Luminaires per 20A B Breaker	96

Lifetime data

Lifespan L70 B50	90000
Lifespan L70 B20	80000
Lifespan L70 B10	78000
Lifespan L80 B50	56000
Lifespan L80 B20	50000
Lifespan L80 B10	49000
Lifespan L90 B50	27000
Lifespan L90 B20	24000
Lifespan L90 B10	24000

Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP54
IK rating	IK07
Diffuser finish	Transparent

Start Surface Wall Round

START Surface Wall Round IP54 500lm Direct 2CCT
0047134

Diffuser material	Glass
Nominal Product Length (mm)	110
Nominal Product Width (mm)	76
Weight (kg)	0.552


Packaging

Single packaging type	Carton
Product EAN number	5410288471341
Packaging single length / height (cm)	13.5
Packaging single width (cm)	12.0
Packaging single depth (cm)	8.0
Units per outer package	8
Packaging outer width (cm)	25.5
Packaging outer depth (cm)	15.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

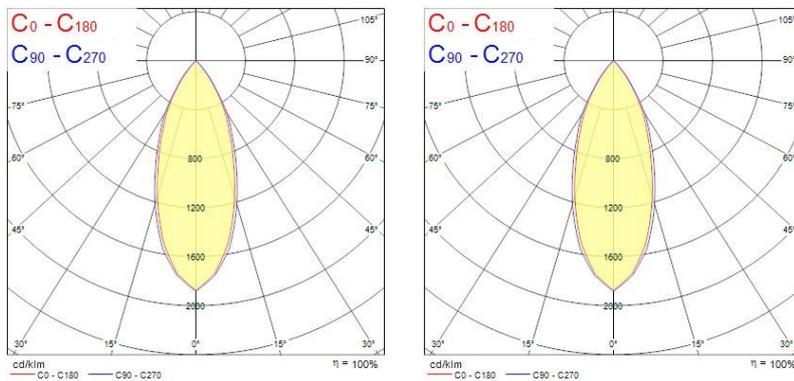

TECHNICAL DRAWINGS

