


Sylproof Superia LED G3 Emergency
SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
0048722



Product features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1578 mm x W 84 mm x H 75 mm size, Polycarbonate housing, Polycarbonate diffuser, Non dimmable, 3 hour emergency, 4000K, CRI80, 4800 lm, 33 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.

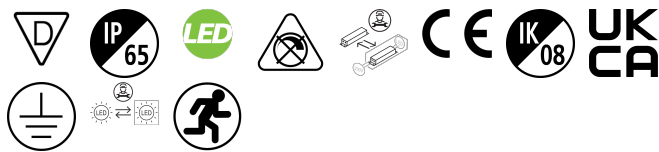

PRODUCT OVERVIEW

Product name	SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed
General application	Logistics & Industry
Warranty	5 years
Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
Beam Angle (°)	100
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	220
Total power consumption (W)	33
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288487229

DATA TABLE

General data	
Product name	SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Fixture rating	Enclosed

Sylproof Superia LED G3 Emergency

SYLPROOF SUPERIA LED G3 1500mm Single 4K E3

0048722

General application	Logistics & Industry
Operating temperature range (°C)	0°C...+30°C
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
Beam Angle (°)	100
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	220
Emergency duration (h)	3

Electrical data

Total power consumption (W)	33
Mains voltage (V)	220-240V
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000

Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	84
Weight (kg)	2.26

Packaging


Single packaging type	Carton
Product EAN number	5410288487229
Packaging single length / height (cm)	167.2
Packaging single width (cm)	8.8
Packaging single depth (cm)	8.4
Units per outer package	1
Packaging outer width (cm)	8.8
Packaging outer depth (cm)	8.4

Sylproof Superia LED G3 Emergency
SYLPROOF SUPERIA LED G3 1500mm Single 4K E3
0048722

Safety data

Optimal operating condition (°C)	0-30
Dry applications use only	No

PHOTOMETRY

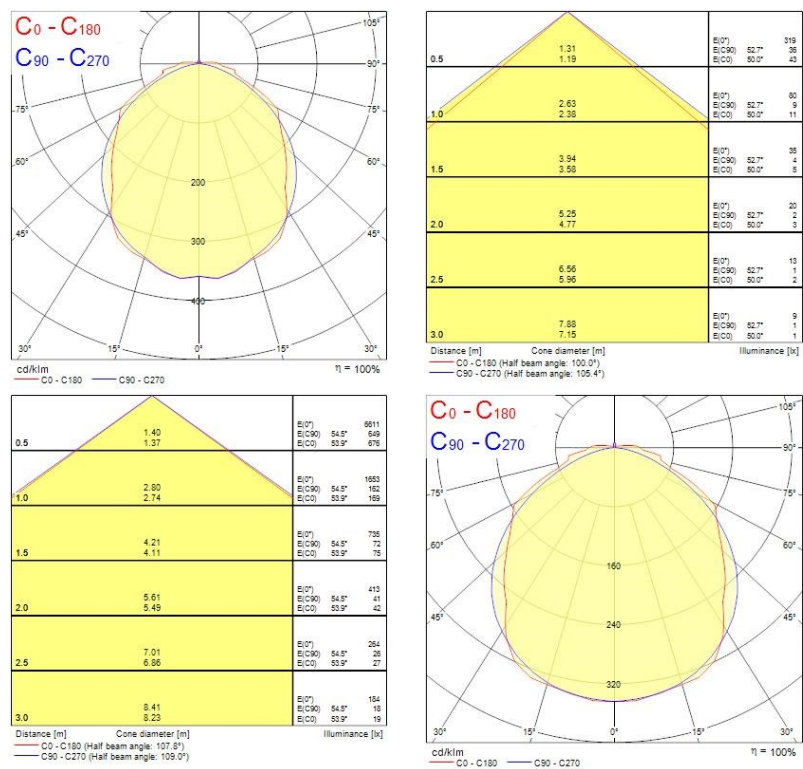

TECHNICAL DRAWINGS

